

EPSON[®]
EXCEED YOUR VISION



EPSON ELECTRONICS AMERICA

MICRO DEVICES

Product Configuration

Guide



CONTENTS

• <u>NEW Crystals PCS Guide.....</u>	Pages 4-23
• <u>Legacy Crystal PCS Guide</u>	Pages 25-49
• <u>Oscillators</u>	Pages 50-89
• <u>TCXO</u>	Pages 90-107
• <u>SAW Oscillators</u>	Pages 108-139
• <u>Programmable Oscillators</u>	Pages 140-158
• <u>Voltage Controlled Oscillators</u>	Pages 159-183
• <u>Sensing Devices.....</u>	Pages 184-188
• <u>RTC</u>	Pages 189-204
• <u>Appendix (Load Cap Codes & Values)</u>	Pages 205-2056

Epson's standard product offering is compliant with EU RoHS directive.

Please refer to the 2019 Crystal Master (pp. 157 ~ 160) for a complete list of products that are RoHS compliant (with Pb exemption) and/or Pb Free and its associated terminal materials.

Product Configuration Guide

CRYSTALS



- 32.768kHz Crystals
- Standard kHz Crystals
- MHz Crystals



EPSON

August 2024

NOTE: Use this updated PCS for all NEW crystal part numbers from May 2016



**NEW CRYSTAL
MICRO DEVICES**
Product Configuration
Guide

EPSON

August 2024



Product Configuration System

32.768 kHz Crystal Unit

FC1610AN

32.768K

C5NN90KC5

1

Model

32.7680kHz Crystal Package Type:
1.60 x 1.00 x 0.5 mm

2

Frequency

3

4

5

6

7

8

Tape & Reel

Drive level

ESR unit (K = kΩ)

ESR

Frequency tolerance

Load capacitance

1

Model

FC1610AN

2

Frequency

32.768kHz

3

Load Cap

C5 = 12.5 pF
90 = 9.0 pF
70 = 7.0 pF
60 = 6.0 pF

4

Frequency Tolerance

NN = +/-20 ppm
AA = +/- 10 ppm

5

ESR

90 = 90 kΩ

6

ESR Unit

K = kΩ

7

Drive level

C = 0.5 μW

8

Tape & Reel

B = Bulk
0 = 1000pcs/reel
5 = 3000pcs/reel
7 = 5000pc/reel



August 2024

NOTES: The values listed above are common/standard values for kHz crystals; some combinations are not possible depending the specific model. Please contact you Epson representative for assistance to verify the part configuration or inquire about a certain value that is not listed above.



Product Configuration System

32.768 kHz Crystal Unit

FC1610BN

32.768K - C5NN60KC5

1

Model

32.7680kHz Crystal Package Type:
1.60 x 1.00 x 0.5 mm

2

Frequency

3

4

5

6

7

8

Tape & Reel

Drive level

ESR unit (K = kΩ)

ESR

Frequency tolerance

Load capacitance

Preliminary

1

Model

FC1610AN

2

Frequency

32.768kHz

3

Load Cap

C5 = 12.5 pF
90 = 9.0 pF

4

Frequency Tolerance

NN = +/-20 ppm

5

ESR

60 = 60 kΩ
- @ -40C to +85C
70 = 70kΩ
- @ -40 to +105C

6

ESR Unit

K = kΩ

7

Drive level

C = 0.5 μW

8

Tape & Reel

B = Bulk
0 = 1000pcs/reel
5 = 3000pcs/reel



August 2024

NOTES: The values listed above are common/standard values for kHz crystals; some combinations are not possible depending the specific model. Please contact you Epson representative for assistance to verify the part configuration or inquire about a certain value that is not listed above.




Product Configuration System

32.768 kHz Crystal Unit

FC2012AN

32.768K - 90NN50KCB

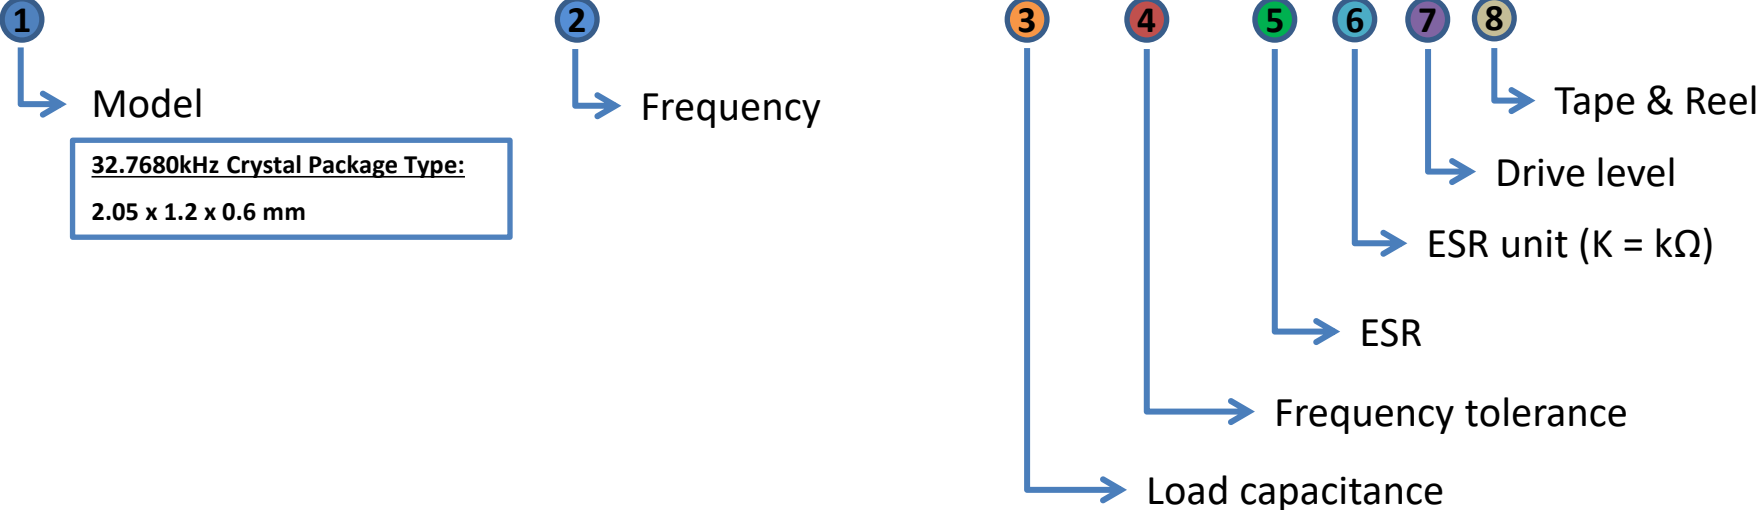

32.7680kHz Crystal Package Type:
2.05 x 1.2 x 0.6 mm

1	2	3	4	5	6	7	8
Model	Frequency	Load Cap	Frequency Tolerance	ESR	ESR Unit	Drive level	Tape & Reel
FC2012AN	32.768kHz	C5 = 12.5 pF 90 = 9.0 pF 70 = 7.0 pF	NN = +/-20 ppm	60 = 60 kΩ - @-40 to +105C 50 = 50 kΩ - @-40 to +85C	K = kΩ	C = 0.5 μW	B = Bulk 7=5000pc/reel



August 2024

NOTES: The values listed above are common/standard values for kHz crystals; some combinations are not possible depending the specific model. Please contact you Epson representative for assistance to verify the part configuration or inquire about a certain value that is not listed above.




Product Configuration System

32.768 kHz Crystal Unit

FC2012SN

32.768K - 90NN90KCB

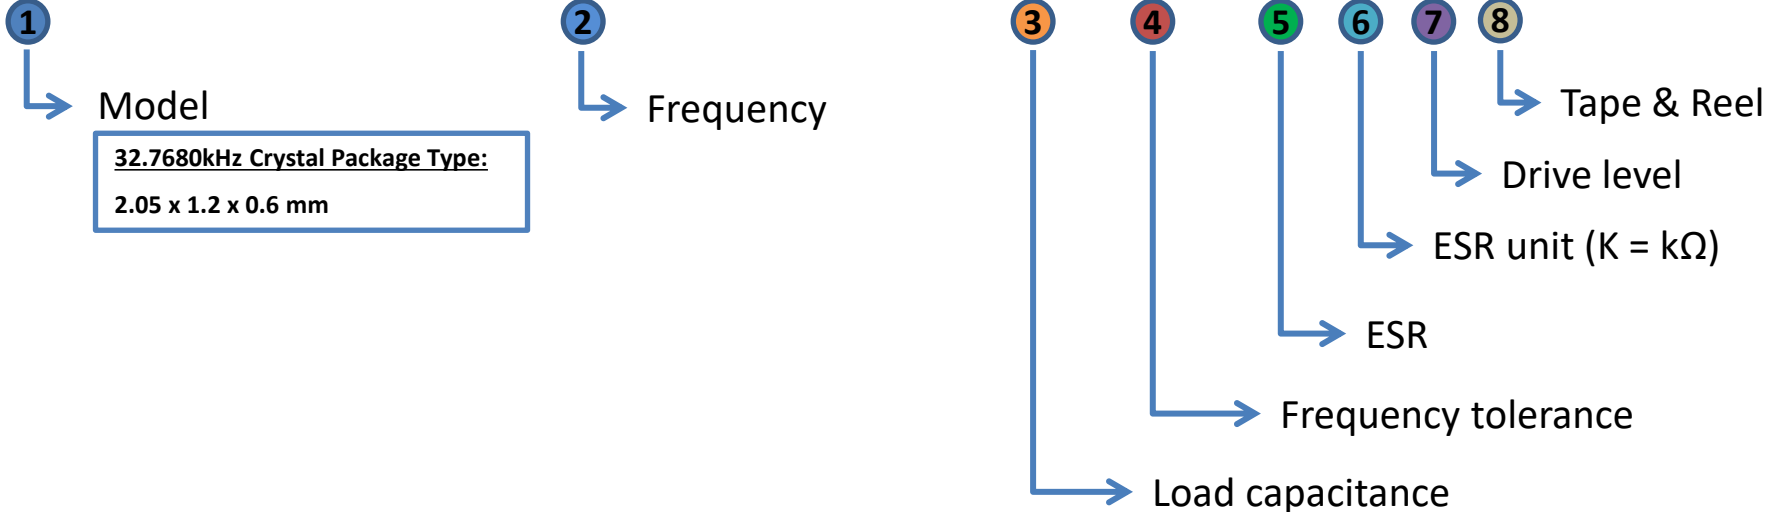

1	2	3	4	5	6	7	8
Model	Frequency	Load Cap	Frequency Tolerance	ESR	ESR Unit	Drive level	Tape & Reel
FC2012SN	32.768kHz	C5 = 12.5 pF 90 = 9.0 pF 70 = 7.0 pF	NN = +/-20 ppm	A0 = 100 kΩ - @-40 to +105C 90 = 90 kΩ - @-40 to +85C	K = kΩ	C = 0.5 μW	B = Bulk 0 = 1000pcs/reel 7 = 5000pcs/reel



August 2024

NOTES: The values listed above are common/standard values for kHz crystals; some combinations are not possible depending the specific model. Please contact you Epson representative for assistance to verify the part configuration or inquire about a certain value that is not listed above.



Product Configuration System

32.768 kHz Crystal Unit

FC2012AA

32.768K - 90NN70KCB

1

Model

32.7680kHz Crystal Package Type:
2.05 x 1.2 x 0.6 mm

2

Frequency

3

4

5

6

7

8

Tape & Reel

Drive level

ESR unit (K = kΩ)

ESR

Frequency tolerance

Load capacitance

Automotive Grade product
Approved Customer & Application only
Contact your Epson rep. for support

1

Model

FC2012AN

2

Frequency

32.768kHz

3

Load Cap

C5 = 12.5 pF
90 = 9.0 pF
70 = 7.0 pF

4

Frequency Tolerance

NN = +/-20 ppm

5

ESR

70 = 70 kΩ
-@-40 to +105C
75 = 75 kΩ
-@-40 to +105C

6

ESR Unit

K = kΩ

7

Drive level

C = 0.5 μW

8

Tape & Reel

B = Bulk
7=5000pc/reel



August 2024

NOTES: The values listed above are common/standard values for kHz crystals; some combinations are not possible depending the specific model. Please contact you Epson representative for assistance to verify the part configuration or inquire about a certain value that is not listed above.




Product Configuration System

32.768 kHz Crystal Unit

FC3215AN

32.768K - 90NN50KCB

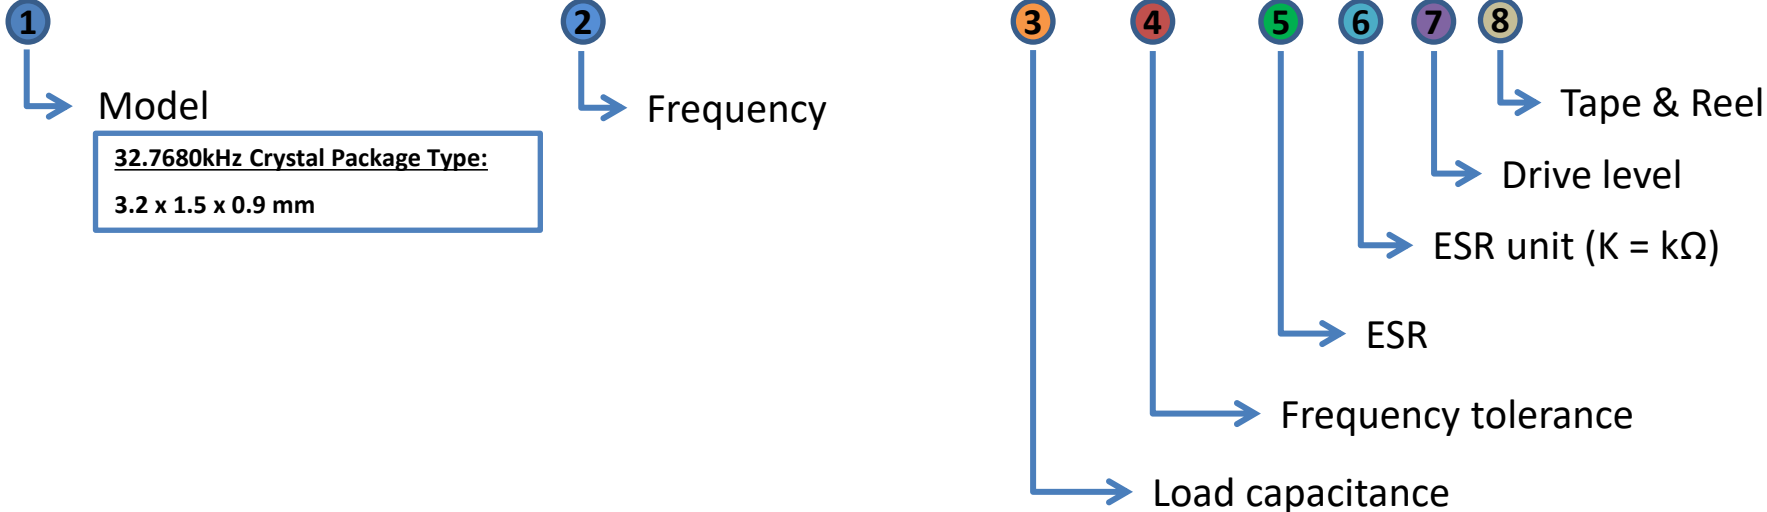

32.7680kHz Crystal Package Type:
3.2 x 1.5 x 0.9 mm

1	2	3	4	5	6	7	8
Model	Frequency	Load Cap	Frequency Tolerance	ESR	ESR Unit	Drive level	Tape & Reel
FC3215AN	32.768kHz	C5 = 12.5 pF 90 = 9.0 pF 70 = 7.0 pF	NN = +/-20 ppm	60 = 60 kΩ - @-40 to +105C 50 = 50 kΩ - @-40 to +85C	K = kΩ	C = 0.5 μW	B = Bulk 0 = 1000pcs/reel 5 = 3000pcs/reel



NOTES: The values listed above are common/standard values for kHz crystals; some combinations are not possible depending the specific model. Please contact you Epson representative for assistance to verify the part configuration or inquire about a certain value that is not listed above.




Product Configuration System

32.768 kHz Crystal Unit

FC-135

32.768K - 90NN70KCB

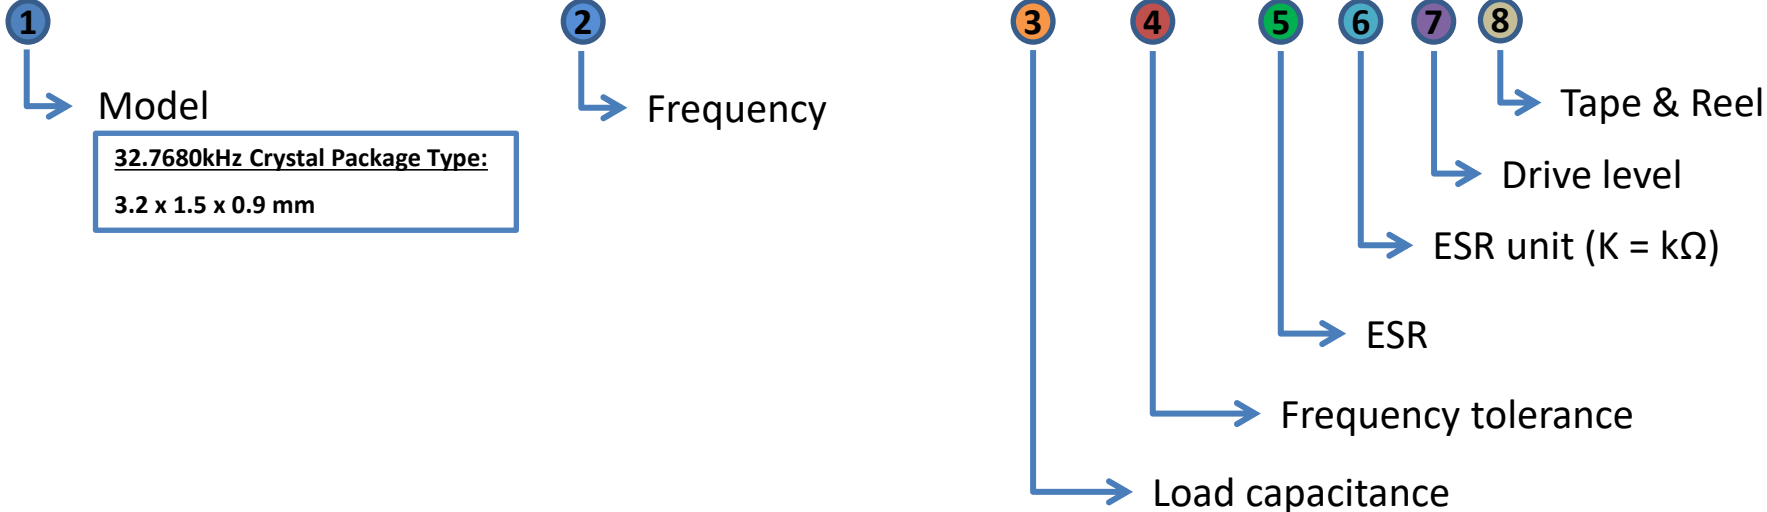

1	2	3	4	5	6	7	8
<u>Model</u>	<u>Frequency</u>	<u>Load Cap</u>	<u>Frequency Tolerance</u>	<u>ESR</u>	<u>ESR Unit</u>	<u>Drive level</u>	<u>Tape & Reel</u>
FC-135	32.768kHz	C5 = 12.5 pF 90 = 9.0 pF 80 = 8.0 pF 70 = 7.0 pF 60 = 6.0 pF	NN = +/-20 ppm AA = +/-10 ppm	70 = 70 kΩ	K = kΩ	C = 0.5 μW	B = Bulk 0 = 1000pcs/reel 5 = 3000pcs/reel



NOTES: The values listed above are common/standard values for kHz crystals; some combinations are not possible depending the specific model. Please contact you Epson representative for assistance to verify the part configuration or inquire about a certain value that is not listed above.




Product Configuration System

32.768 kHz Crystal Unit

FC-135R

32.768K - 90NN50KCB

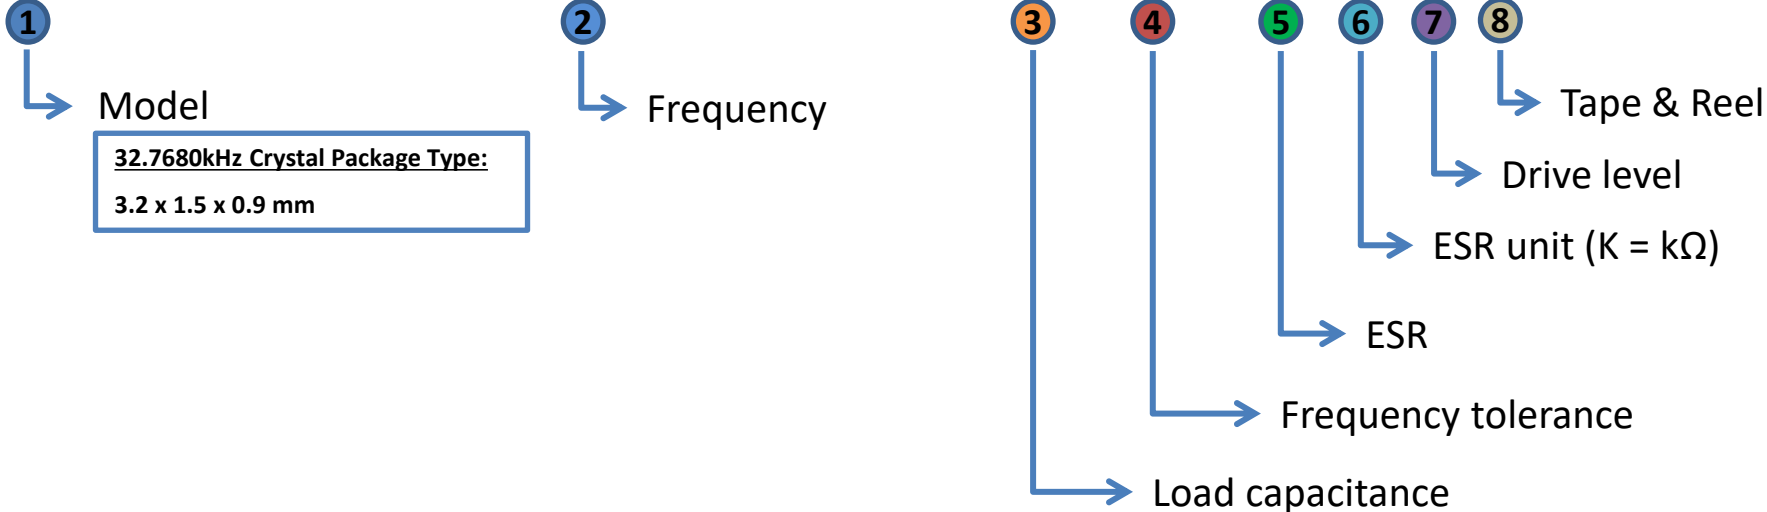

32.7680kHz Crystal Package Type:
 3.2 x 1.5 x 0.9 mm

1	2	3	4	5	6	7	8
Model	Frequency	Load Cap	Frequency Tolerance	ESR	ESR Unit	Drive level	Tape & Reel
FC-135R	32.768kHz	C5 = 12.5 pF 90 = 9.0 pF 70 = 7.0 pF 60 = 6.0 pF	NN = +/-20 ppm AA = +/-10 ppm	50 = 50 kΩ	K = kΩ	C = 0.5 μW	B = Bulk 0 = 1000pcs/reel 5 = 3000pcs/reel



August 2024

NOTES: The values listed above are common/standard values for kHz crystals; some combinations are not possible depending the specific model. Please contact you Epson representative for assistance to verify the part configuration or inquire about a certain value that is not listed above.




Product Configuration System

32.768 kHz Crystal Unit

FC-12M

32.768K - 90NN90KCB

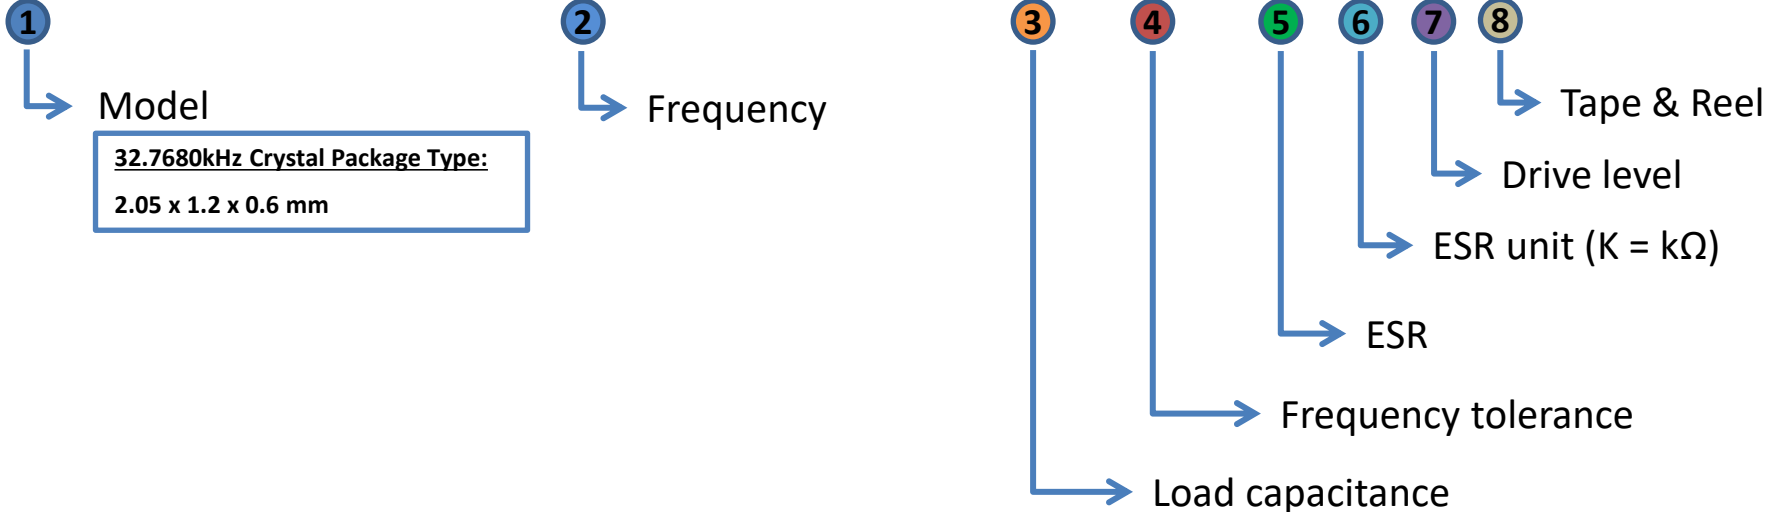

32.7680kHz Crystal Package Type:
2.05 x 1.2 x 0.6 mm

1	2	3	4	5	6	7	8
Model	Frequency	Load Cap	Frequency Tolerance	ESR	ESR Unit	Drive level	Tape & Reel
FC-12M	32.768kHz	C5 = 12.5 pF 90 = 9.0 pF 70 = 7.0 pF 60 = 6.0 pF	NN = +/-20 ppm AA = +/-10 ppm	90 = 90 kΩ	K = kΩ	C = 0.5 μW	B = Bulk 0 = 1000pcs/reel 5 = 3000pcs/reel 7 = 5000pcs/reel



NOTES: The values listed above are common/standard values for kHz crystals; some combinations are not possible depending the specific model. Please contact you Epson representative for assistance to verify the part configuration or inquire about a certain value that is not listed above.



Product Configuration System

32.768 kHz Crystal Unit

FC-13A

32.768K - 90NN70KCB

1

Model

32.768kHz Crystal Package Type:
3.2 x 1.5 x 0.9 mm

2

Frequency

3

4

5

6

7

8

Tape & Reel

Drive level

ESR unit (K = kΩ)

ESR

Frequency tolerance

Load capacitance

Non Promotional

**Automotive Grade product
Approved Customer & Application only
Contact your Epson rep. for support**

1

Model
FC-13A

2

Frequency
32.768kHz

3

Load Cap
C5 = 12.5 pF
90 = 9.0 pF
70 = 7.0 pF
60 = 6.0 pF

4

Frequency Tolerance
NN = +/-20 ppm
AA = +/-10 ppm

5

ESR
70 = 70 kΩ

6

ESR Unit
K = kΩ

7

Drive level
C = 1.0 μW

8

Tape & Reel
B = Bulk
0 = 1000pcs/reel
5 = 3000pcs/reel

EPSON

August 2024

NOTES: The values listed above are common/standard values for kHz crystals; some combinations are not possible depending the specific model. Please contact you Epson representative for assistance to verify the part configuration or inquire about a certain value that is not listed above.

EPSON[®]
EXCEED YOUR VISION



EPSON ELECTRONICS AMERICA

MHZ Crystal Product Configuration Guide




Product Configuration System



MHz Range Crystal Units

FA-238 **25.00M** – **90NNYYB80RG5**

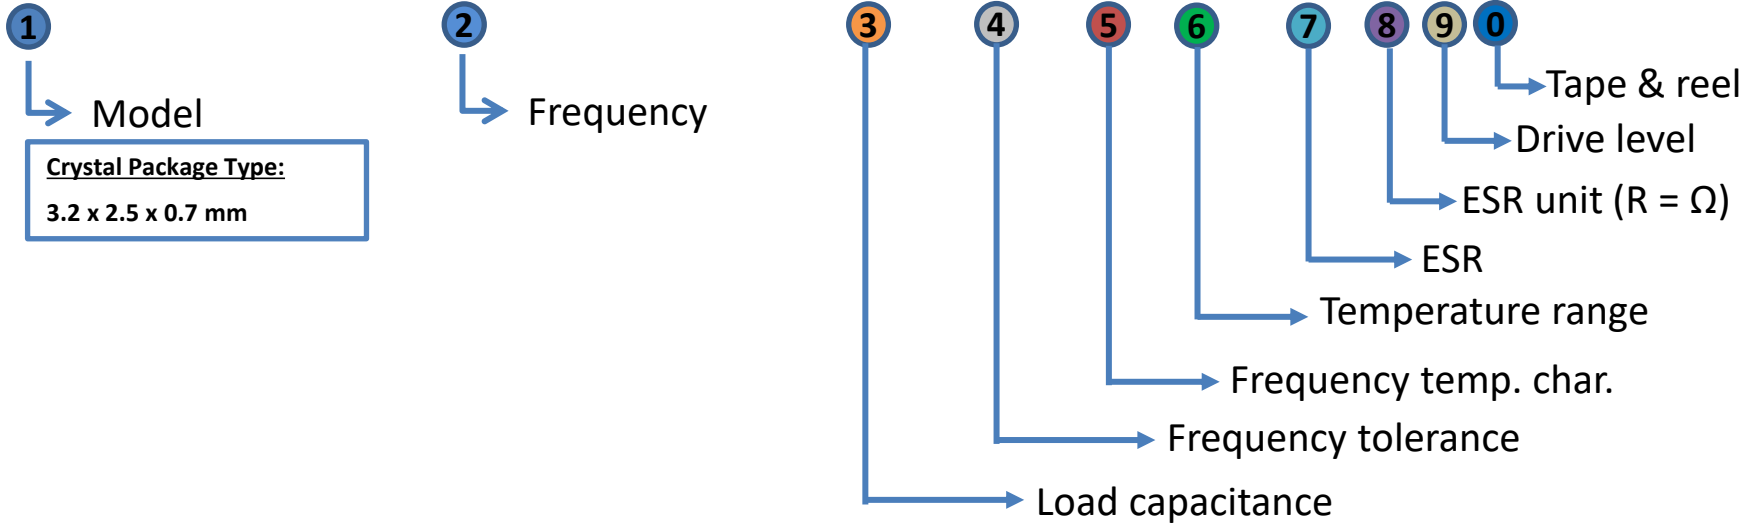


1	3	4	5	6	7	8	9	0
Model FA-238	Load cap N0 = 20 pF J0 = 18 pF G0 = 16 pF C5 = 12.5 pF C0 = 12 pF A0 = 10 pF 90 = 9.0 pF 80 = 8.0 pF 70 = 7.0 pF	Frequency tolerance bb = +/-50 ppm YY = +/-30 ppm TT = +/-25 ppm NN = +/-20 ppm FF = +/-15 ppm	Freq. temp. char. bb = +/-50 ppm YY = +/-30 ppm TT = +/-25 ppm NN = +/-20 ppm FF = +/-15 ppm	Temp. range B = -20 to +70C U = -20 to +75C N = -30 to +85C G = -40 to +85C H = -40 to 105C	ESR = Ω 80 = 80 Ω 60 = 60 Ω 50 = 50 Ω 40 = 40 Ω	Drive level G = 200 μW E = 100 μW	Tape & reel B = Bulk 0 = 1000pcs/reel 6 = 2000pcs/reel 5 = 3000pcs/reel	

Product Configuration System



MHz Range Crystal Units

FA-238V 12.00M – 90NNYYBA0RG5

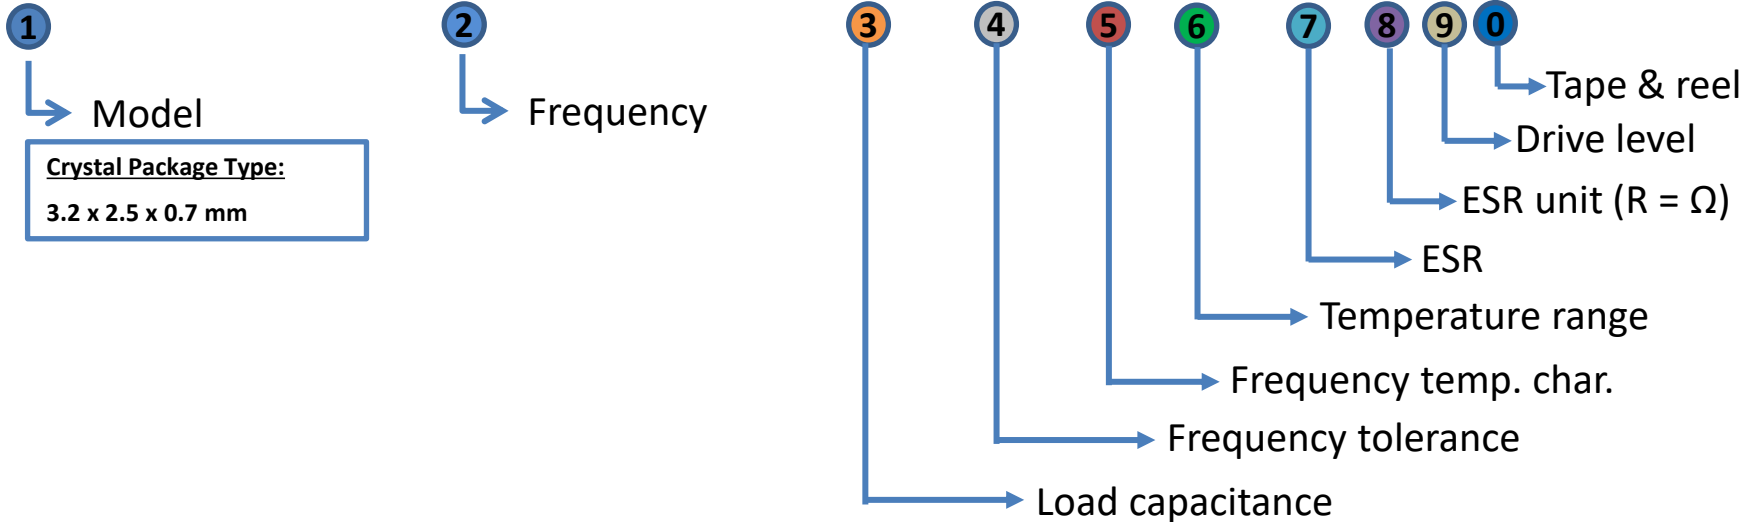

1	Model	3	Load cap	4	Frequency tolerance	5	Freq. temp. char.	6	Temp. range	7	8	ESR = Ω	9	Drive level	0	Tape & reel
	FA-238V		N0 = 20 pF J0 = 18 pF F0 = 15 pF C5 = 12.5 pF C0 = 12 pF A0 = 10 pF 90 = 9.0pF 80 = 8.0 pF 70 = 7.0 pF		bb = +/-50 ppm YY= +/-30 ppm NN = +/-20 ppm FF = +/-15 ppm AA = +/- 10 ppm		bb = +/-50 ppm YY= +/-30 ppm NN = +/-20 ppm FF = +/-15 ppm AA = +/- 10 ppm		B = -20 to +70C U = -20 to +75C N = -30 to +85C G = -40 to +85C H = -40 to 105C			A0 = 100 Ω 80 = 80 Ω		E = 100 μW G = 200 μW		B = Bulk 0 = 1000pcs/reel 5 = 3000pcs/reel



August 2024


NOTES: The values listed above are common/standard values for MHz crystals; some combinations are not possible depending the specific model. Please contact you Epson representative for assistance to verify the part configuration or inquire about a certain value that is not listed above.

Product Configuration System



MHz Range Crystal Units

TSX-3225 25.00M – 90NNYYU60RG5

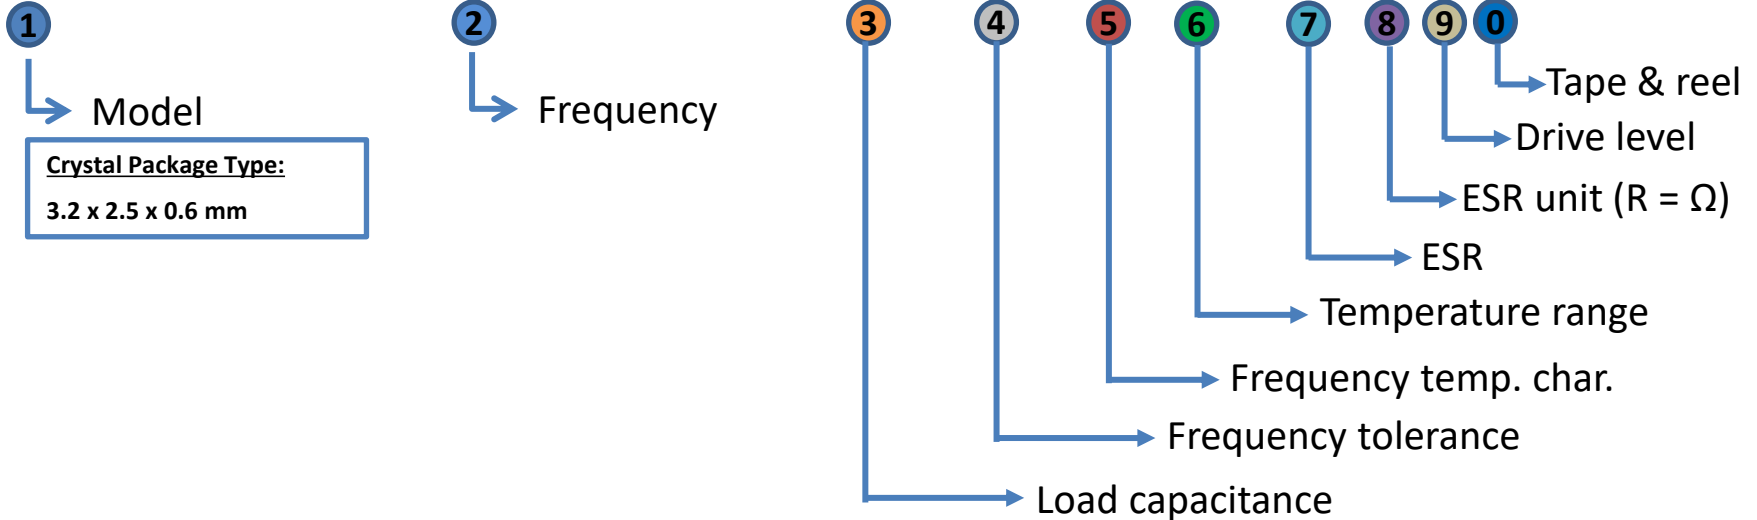


1 Model TSX-3225	3 Load cap Q0=22pF N0 = 20 pF J0 = 18 pF G0 = 16pF F0 = 15pF C5 = 12.5pF C0 = 12 pF A0 = 10 pF 90 = 9.0 pF 80 = 8.0 pF 70 = 7.0 pF D0= 13.0pF	4 Frequency tolerance bb = +/-50 ppm YY= +/-30 ppm NN = +/-20 ppm FF = +/-15 ppm AA = +/- 10 ppm 77 = +/- 7ppm	5 Freq. temp. char. bb = +/-50 ppm YY= +/-30 ppm NN = +/-20 ppm FF = +/-15 ppm AA = +/- 10 ppm	6 Temp. range U = -20 to +75C N = -30 to +85C G = -40 to +85C H = -40 to 105C	7 8 ESR = Ω 60 = 60 Ω 40 = 40 Ω	9 Drive level E = 100 μW G = 200 μW	0 Tape & reel B = Bulk 0 = 1000pcs/reel 6 = 2000pcs/reel 5 = 3000pcs/reel
----------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------	----------------------------------------------	--------------------------------------------------	--------------------------------------------------------------------------------------------------

Product Configuration System



MHz Range Crystal Units

FA-20H **25.00M** – **60NNYYU80RE5**

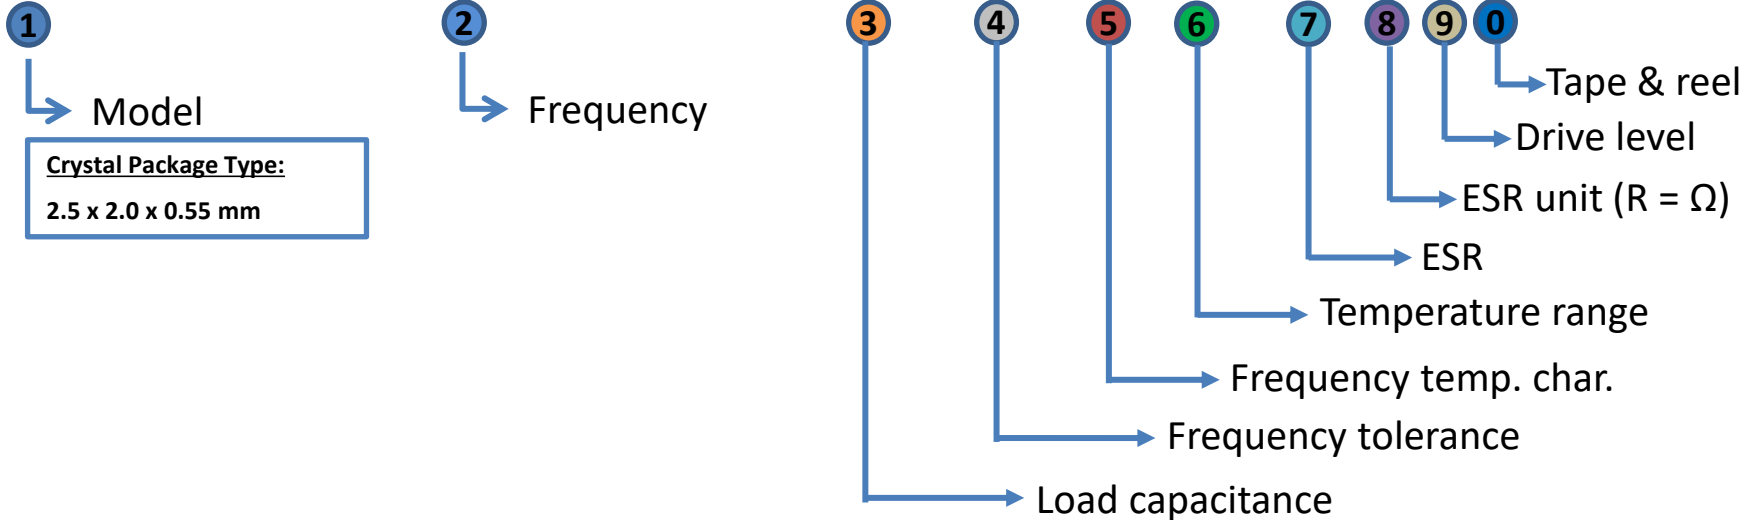


1 Model	3 Load cap	4 Frequency tolerance	5 Freq. temp. char.	6 Temp. range	7 ESR = Ω	8 Drive level	0 Tape & reel
FA-20H	N0 = 20 pF J0 = 18 pF G0 = 16pF F0 = 15pF C0 = 12 pF A0 = 10 pF 90 = 9.0 pF 80 = 8.0 pF 70 = 7.0 pF 60 = 6.0 pF	bb = +/-50 ppm YY= +/-30 ppm TT= +/-25 ppm NN = +/-20 ppm FF = +/-15 ppm AA = +/- 10 ppm	bb = +/-50 ppm YY= +/-30 ppm TT= +/-25 ppm NN = +/-20 ppm FF = +/-15 ppm AA = +/- 10 ppm	U = -20 to +75C N = -30 to +85C G = -40 to +85C H = -40 to 105C	A5 = 150 Ω 80 = 80 Ω 60 = 60 Ω 50 = 50 Ω 40 = 40 Ω	E = 100 μW G = 200 μW	B = Bulk 0 = 1000pcs/reel 5 = 3000pcs/reel

Product Configuration System



MHz Range Crystal Units

FA-118T 25.00M – 60NNYYUA0RE5

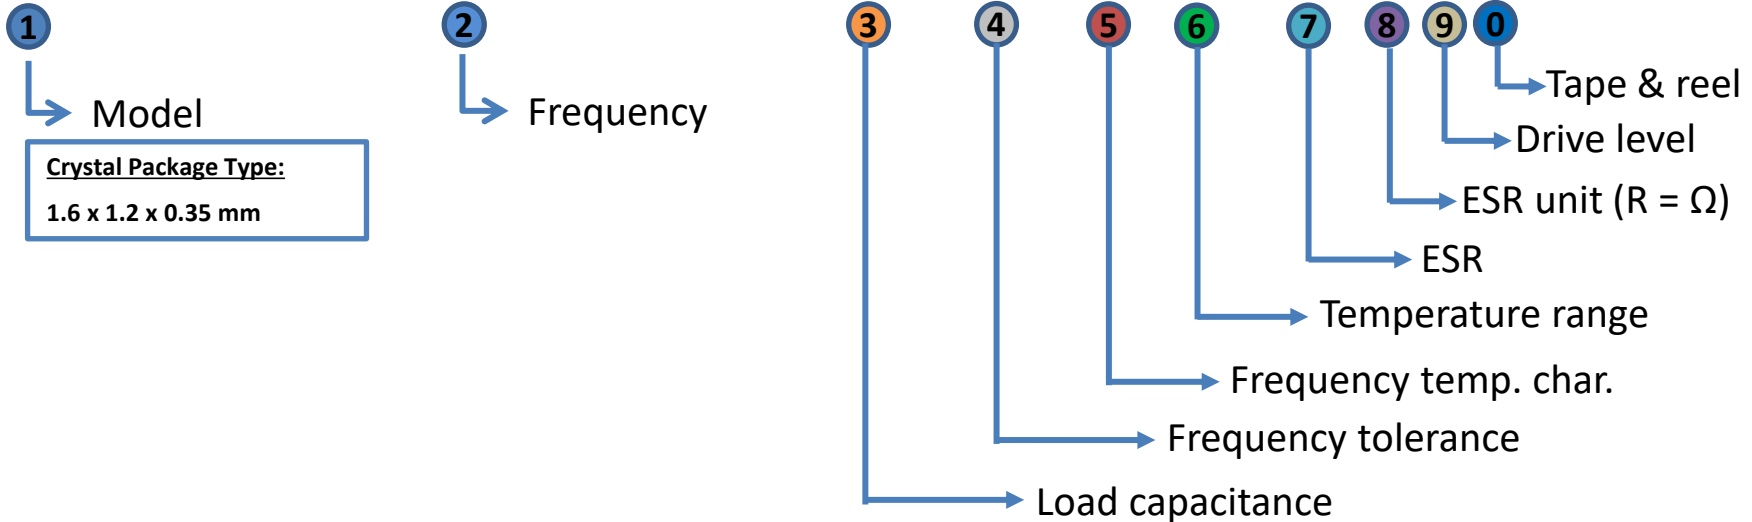


1 Model	3 Load cap	4 Frequency tolerance	5 Freq. temp. char.	6 Temp. range	7 8 ESR = Ω	9 Drive level	0 Tape & reel
FA-118T	N0 = 20 pF	YY= +/-30 ppm	YY= +/-30 ppm	U = -20 to +75C	B0 = 200 Ω	E = 100 μW	B = Bulk
	G0 = 16pF	TT= +/-25 ppm	TT= +/-25 ppm	N = -30 to +85C	A0 = 100 Ω	G = 200 μW	0 = 1000pcs/reel
2 Frequency	C0 = 12 pF	NN = +/-20 ppm	NN = +/-20 ppm	G = -40 to +85C	80 = 80 Ω		5 = 3000pcs/reel
24 ~ 54 MHz	A0 = 10 pF	FF = +/-15 ppm	FF = +/-15 ppm	H = -40 to 105C			8 = 6000pcs/reel
	90 = 9.0 pF	AA = +/- 10 ppm	AA = +/- 10 ppm				
	80 = 8.0 pF						
	70 = 7.0 pF						
	60 = 6.0 pF						

Product Configuration System



MHz Range Crystal Units

FA-128 **25.00M** – **60NNYYUA0RE5**

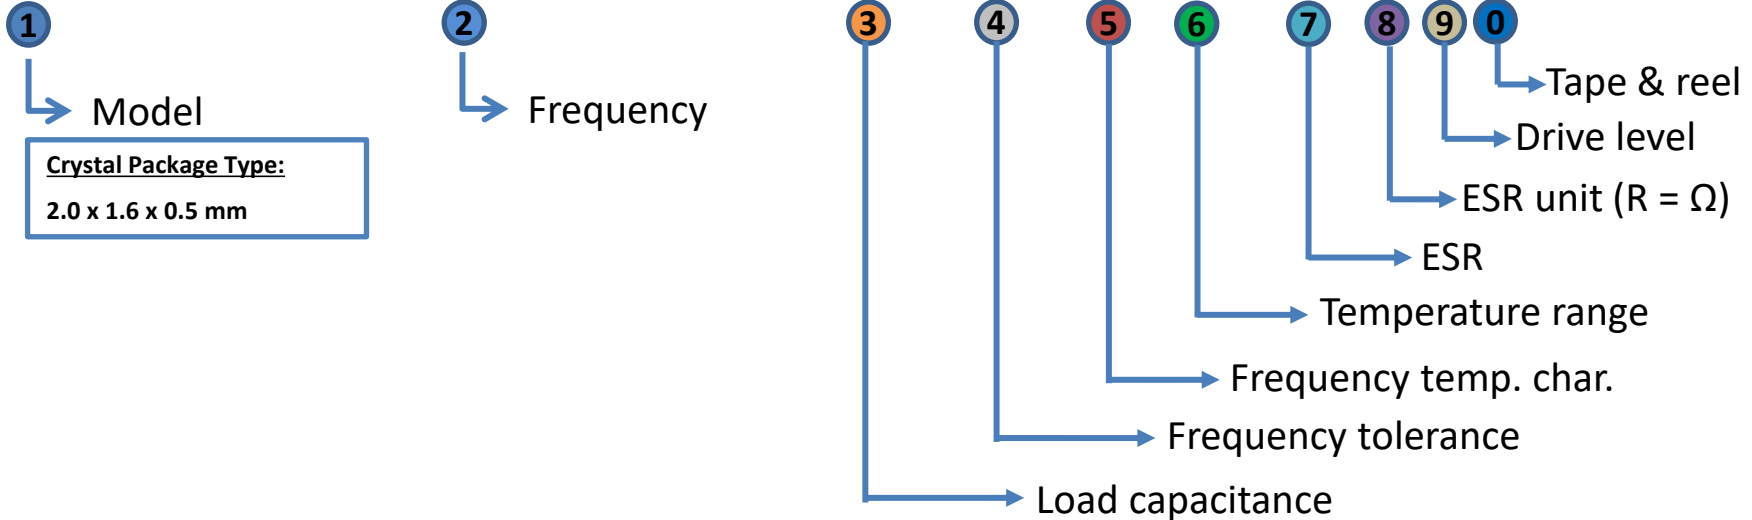


1 Model	3 Load cap	4 Frequency tolerance	5 Freq. temp. char.	6 Temp. range	7 8 ESR = Ω	9 Drive level	0 Tape & reel
FA-128	N0 = 20 pF J0 = 18 pF G0 = 16pF F0 = 15pF C5 = 12.5pF C0 = 12 pF A0 = 10 pF 90 = 9.0 pF 80 = 8.0 pF 70 = 7.0 pF 60 = 6.0 pF	bb = +/-50 ppm YY= +/-30 ppm TT= +/-25 ppm NN = +/-20 ppm FF = +/-15 ppm AA = +/- 10 ppm	bb = +/-50 ppm YY= +/-30 ppm TT= +/-25 ppm NN = +/-20 ppm FF = +/-15 ppm AA = +/- 10 ppm	U = -20 to +75C N = -30 to +85C G = -40 to +85C H = -40 to 105C	A5 = 150 Ω A0 = 100 Ω 80 = 80 Ω 60 = 60 Ω	E = 100 μW G = 200 μW	B = Bulk 0 = 1000pcs/reel 5 = 3000pcs/reel 7 = 5000pcs/reel

Product Configuration System



MHz Range Crystal Units

FA1008AN52.00M – 80AANN60RGB

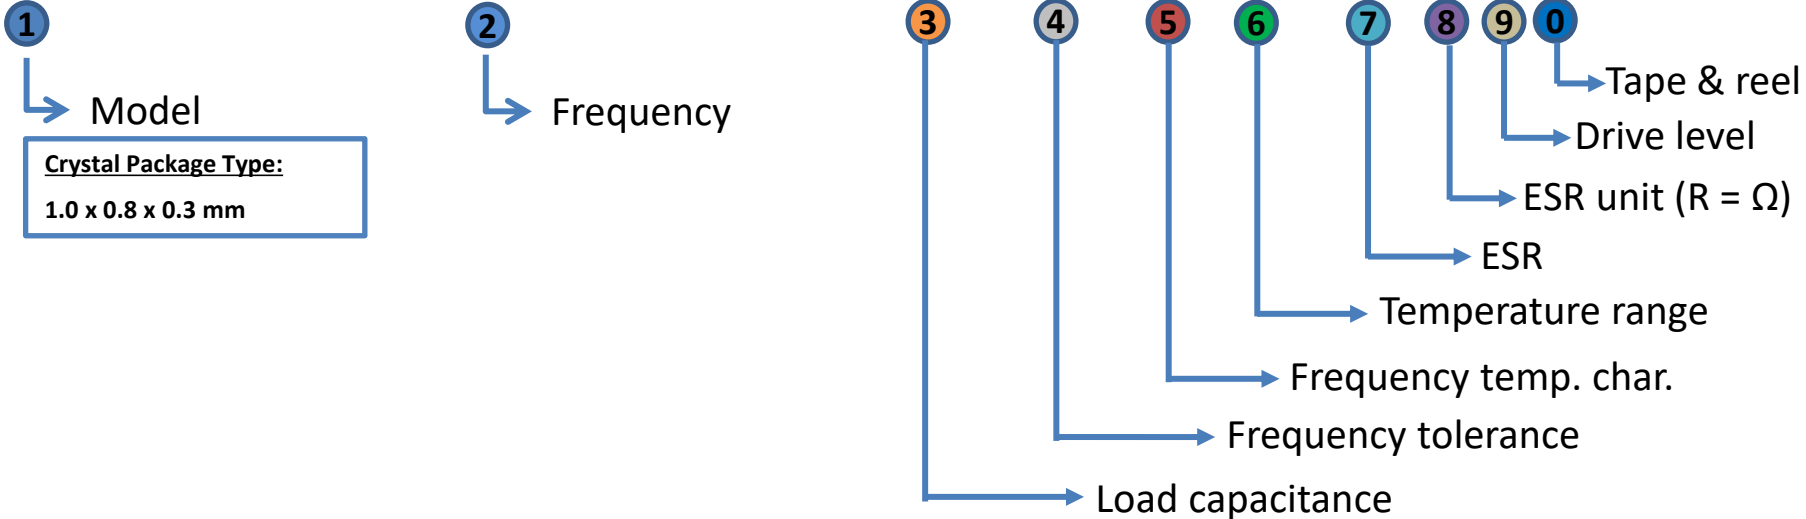

1	3	4	5	6	7	8	9	0
Model FA1008AN	Load cap 80 = 8.0 pF	Frequency tolerance AA = +/- 10 ppm	Freq. temp. char. NN = +/-20 ppm (-40 to +85C) FF = +/-15 ppm (-30 to +85C) AA = +/- 10 ppm (-20 to +75C)	Temp. range G = -40 to +85C H = -40 to 105C (Contact Epson)	ESR = Ω 60 = 60 Ω	Drive level G = 200 μW	Tape & reel B = Bulk	
2 Frequency 40 ~ 100 MHz								


NOTES: The values listed above are common/standard values for MHz crystals; some combinations are not possible depending the specific model. Please contact you Epson representative for assistance to verify the part configuration or inquire about a certain value that is not listed above.

Product Configuration System



MHz Range Crystal Units

FA2016AA 40.00M – 80AAbbJ60RG7

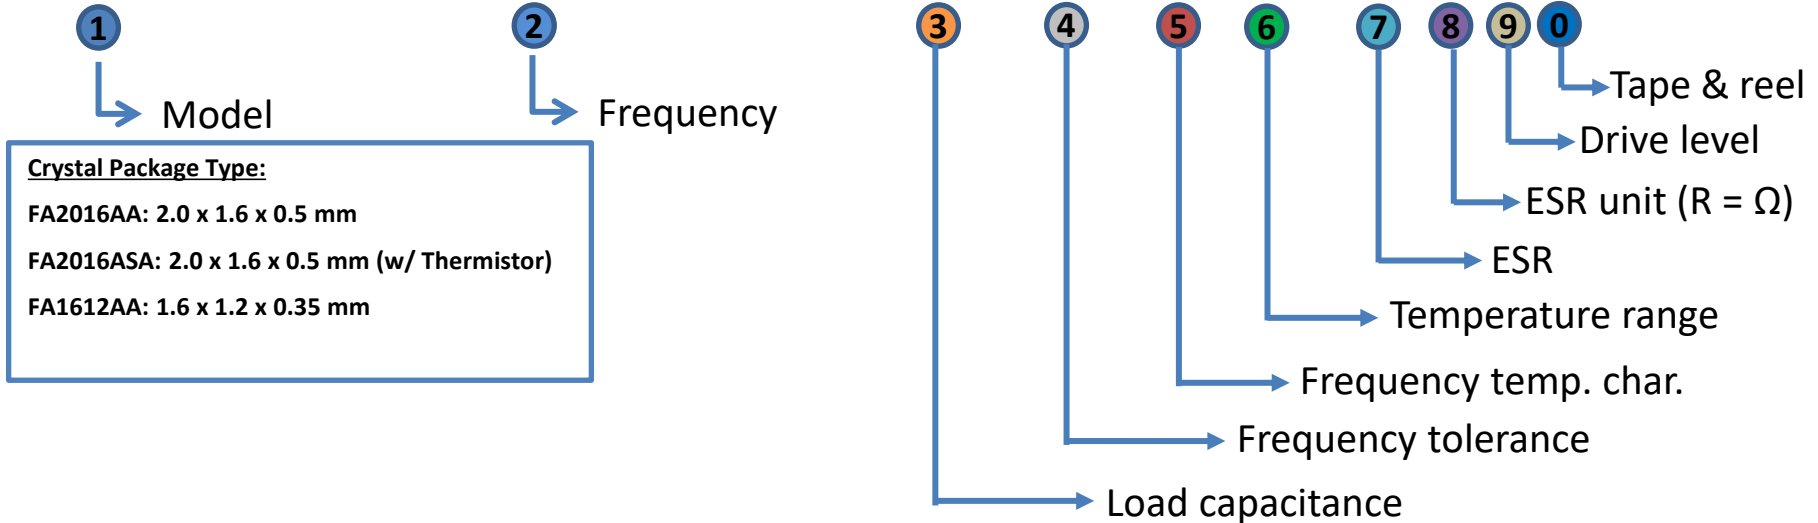

Crystal Package Type:
 FA2016AA: 2.0 x 1.6 x 0.5 mm
 FA2016ASA: 2.0 x 1.6 x 0.5 mm (w/ Thermistor)
 FA1612AA: 1.6 x 1.2 x 0.35 mm

1 Model	3 Load cap	4 Frequency tolerance	5 Freq. temp. char.	6 Temp. range	7 ESR = Ω	8 ESR unit	9 Drive level	0 Tape & reel
FA2016AA	N0 = 20 pF	bb = +/-50 ppm	bb = +/-50 ppm	U = -20 to +75C	A5 = 150 Ω	A5 = 150 Ω	E = 100 μW	B = Bulk
FA2016ASA	J0 = 18 pF	YY= +/-30 ppm	YY= +/-30 ppm	N = -30 to +85C	A0 = 100 Ω	A0 = 100 Ω	G = 200 μW	0 = 1000pcs/reel
FA1612AA	G0 = 16pF	TT= +/-25 ppm	TT= +/-25 ppm	G = -40 to +85C	80 = 80 Ω	80 = 80 Ω		5 = 3000pcs/reel
	F0 = 15pF	NN = +/-20 ppm	NN = +/-20 ppm	H = -40 to 105C	60 = 60 Ω	60 = 60 Ω		7 = 5000pcs/reel
	C5 = 12.5pF	FF = +/-15 ppm	FF = +/-15 ppm	J = -40 to 125C				
	C0 = 12 pF	AA = +/- 10 ppm	AA = +/- 10 ppm					
	A0 = 10 pF	ZZ = Others	ZZ = Others					
	90 = 9.0 pF							
	80 = 8.0 pF							
	70 = 7.0 pF							
	60 = 6.0 pF							




NOTES: The values listed above are common/standard values for MHz crystals; some combinations are not possible depending the specific model. Please contact you Epson representative for assistance to verify the part configuration or inquire about a certain value that is not listed above.

Product Configuration System



MHz Range Crystal Units

FA1210AN 32.00M – 80AAFFBA0REB

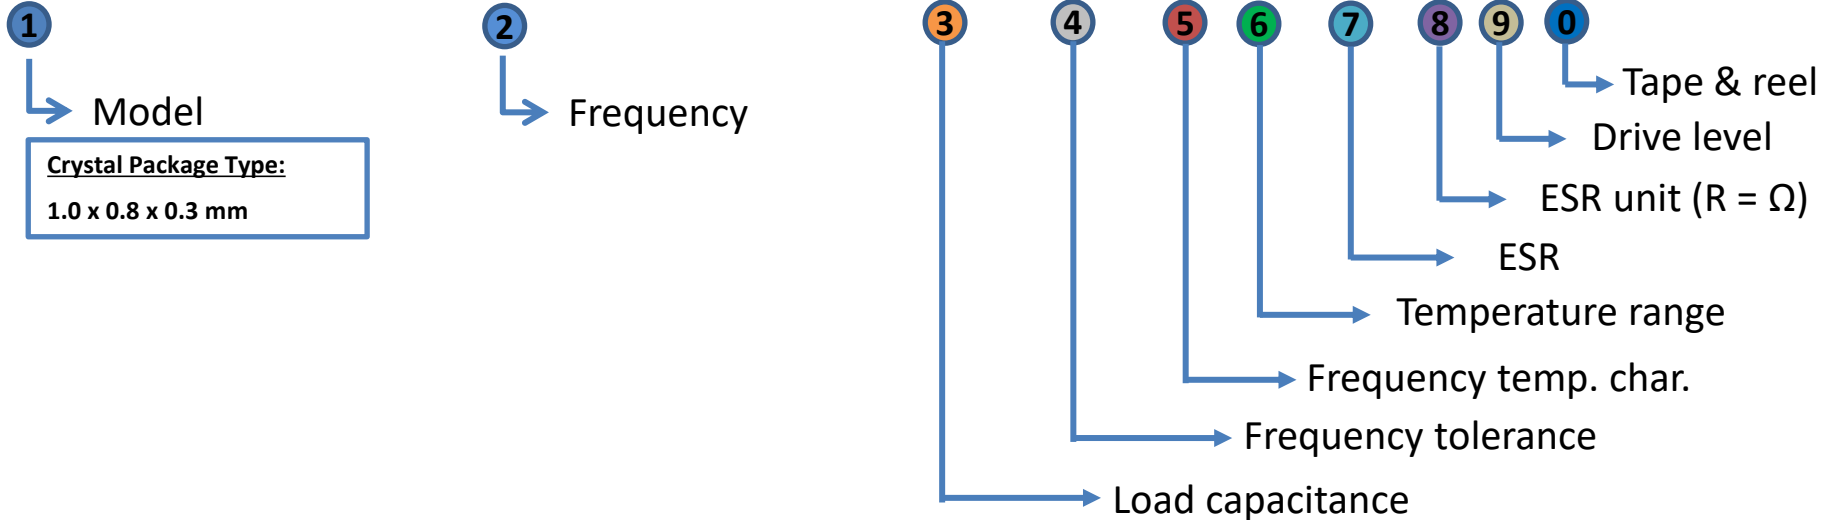


- 1 **Model**
FA1210AN
- 2 **Frequency**
32 ~ 100 MHz
- 3 **Load cap**
60 = 7.0 pF
80 = 8.0 pF
- 4 **Frequency tolerance**
AA = +/- 10 ppm
- 5 **Freq. temp. char.**
YY = +/- 30 ppm
NN = +/-20 ppm
FF = +/-15 ppm
- 6 **Temp. range**
B = -20 to 70C
G = -40 to +85C
- 7 **ESR = Ω**
A0 = 100 Ω
- 8 **Drive level**
E = 100 μW
- 9 **Tape & reel**
B = Bulk



August 2024

NOTES: The values listed above are common/standard values for MHz crystals; some combinations are not possible depending the specific model. Please contact you Epson representative for assistance to verify the part configuration or inquire about a certain value that is not listed above.

NOTE: This PCS applies to crystal part numbers before May 2016




LEGACY CRYSTAL MICRO DEVICES Product Configuration Guide

EPSON

Product Configuration System



kHz Range Crystal Units

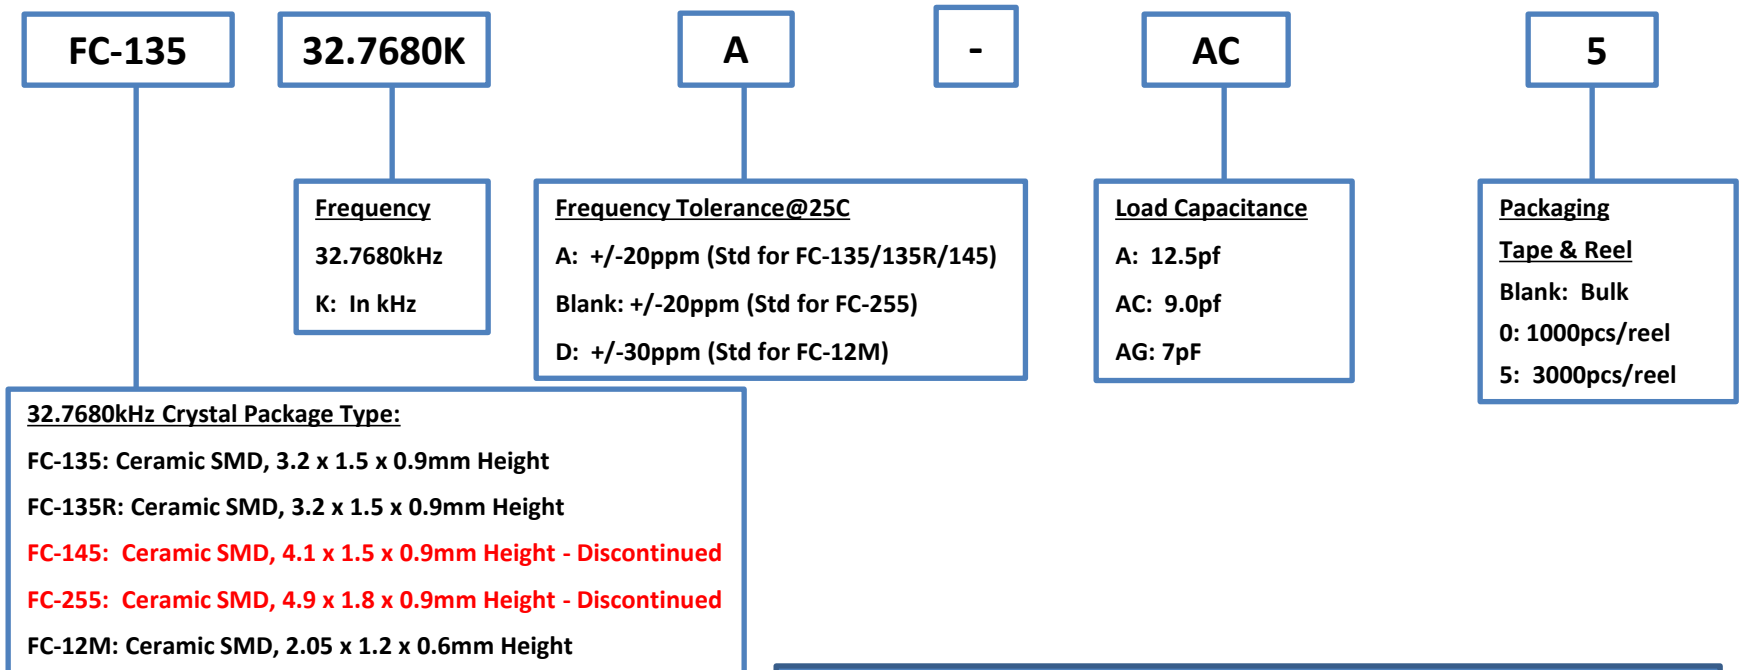

NOTES:


- 1) This product configuration guide is applicable only to 32.7680kHz Crystals. For other frequencies, please reference the Standard kHz Crystal Product Configuration System.
- 2) If you require a load capacitance other than the above listed, please contact your Epson representative for assistance.



Product Configuration System

32.768 kHz Crystal Unit with 0.35mm height for Smart Card

Discontinued

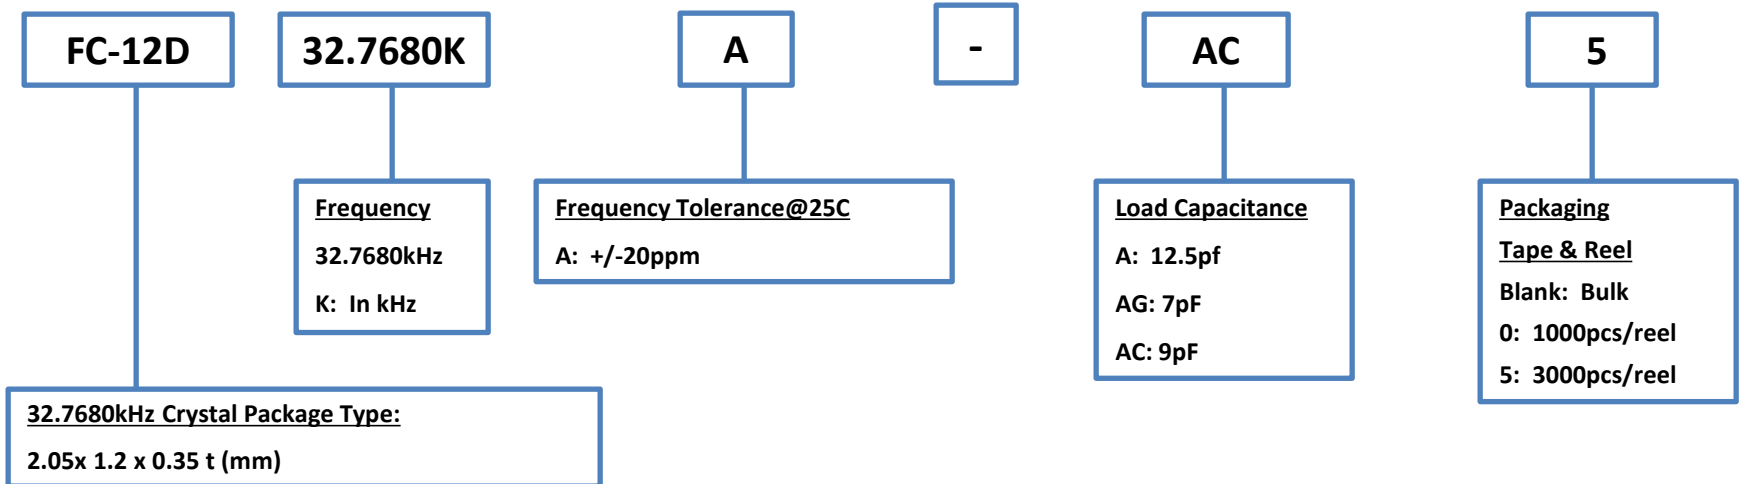

NOTES:

- 1) If your application for this part is not a Smart Card, please contact your Epson representative for assistance.
- 2) If you require a load capacitance other than the above listed, please contact your Epson representative for assistance.


EPSON

August 2024



Product Configuration System

kHz Range Crystal Units

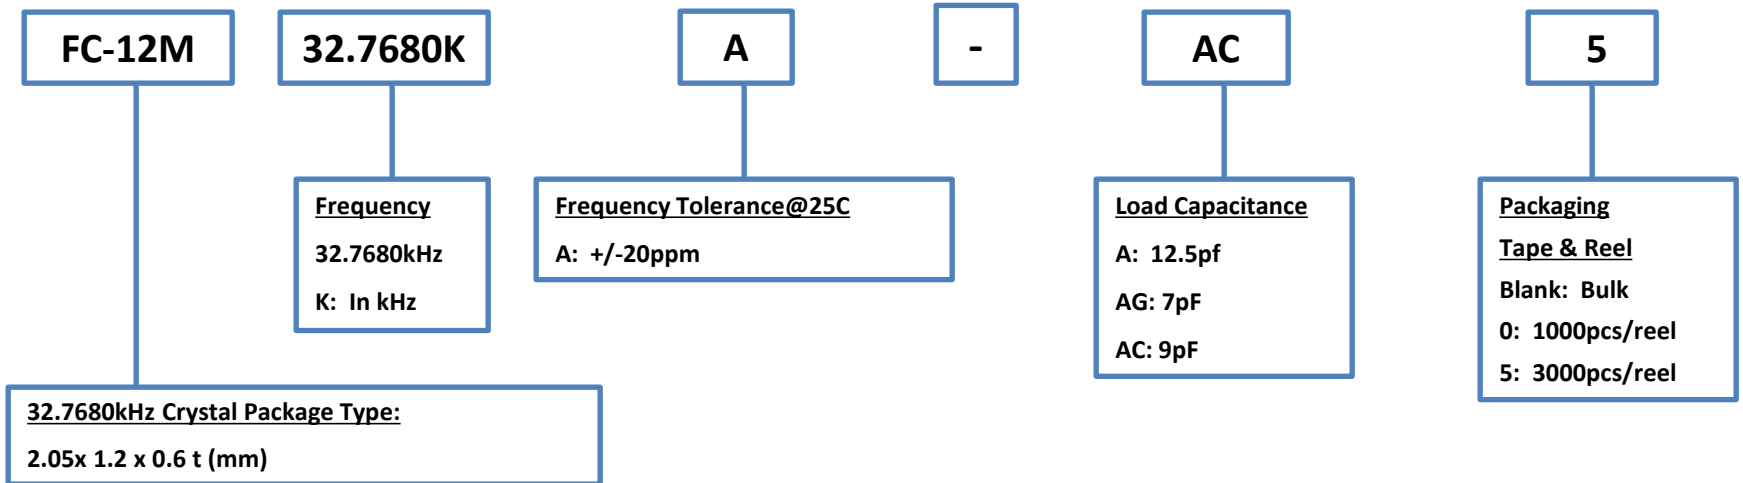

NOTES:


- 1) If you require a frequency or tolerance other than the above listed, please contact your Epson representative for assistance.

Product Configuration System



kHz Range Crystal Units

Non Promotional

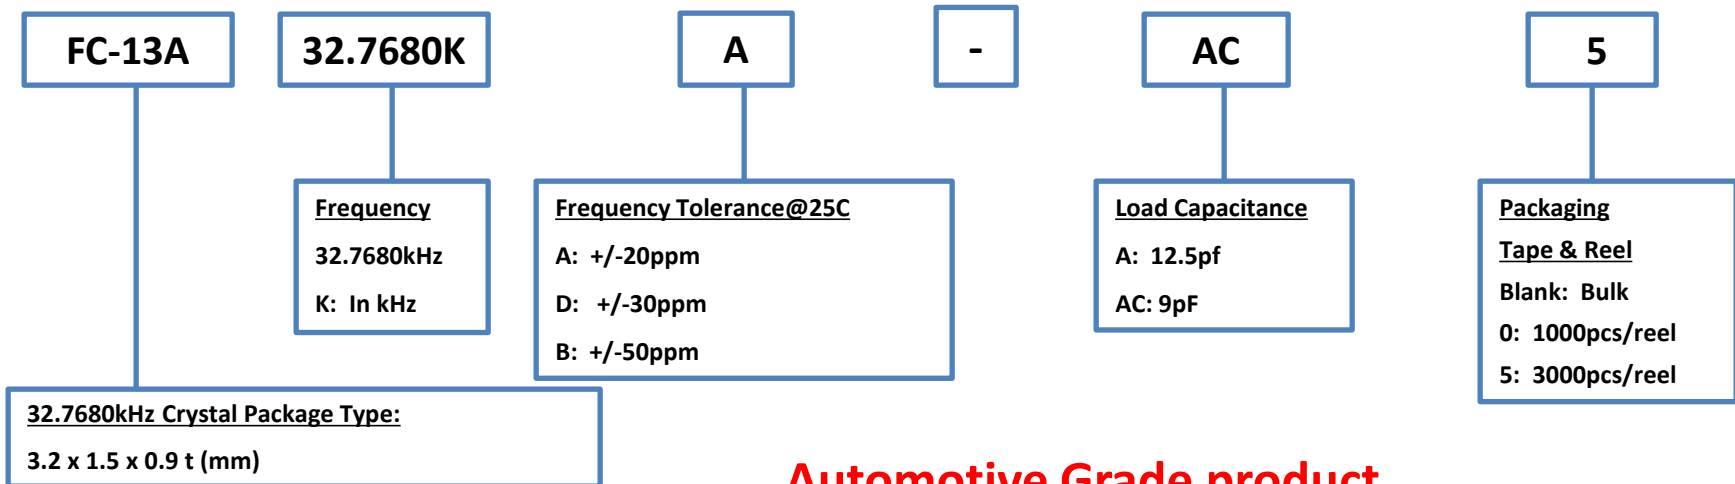

**Automotive Grade product
Approved Customer & Application only
Contact your Epson rep. for support**

NOTES:

- 1) This product configuration guide is applicable only to 32.7680kHz Crystals. For other frequencies, please reference the Standard kHz Crystal Product Configuration System.
- 2) If you require a load capacitance other than the above listed, please contact your Epson representative for assistance.


EPSON

Product Configuration System



kHz Range Crystal Units

Discontinued

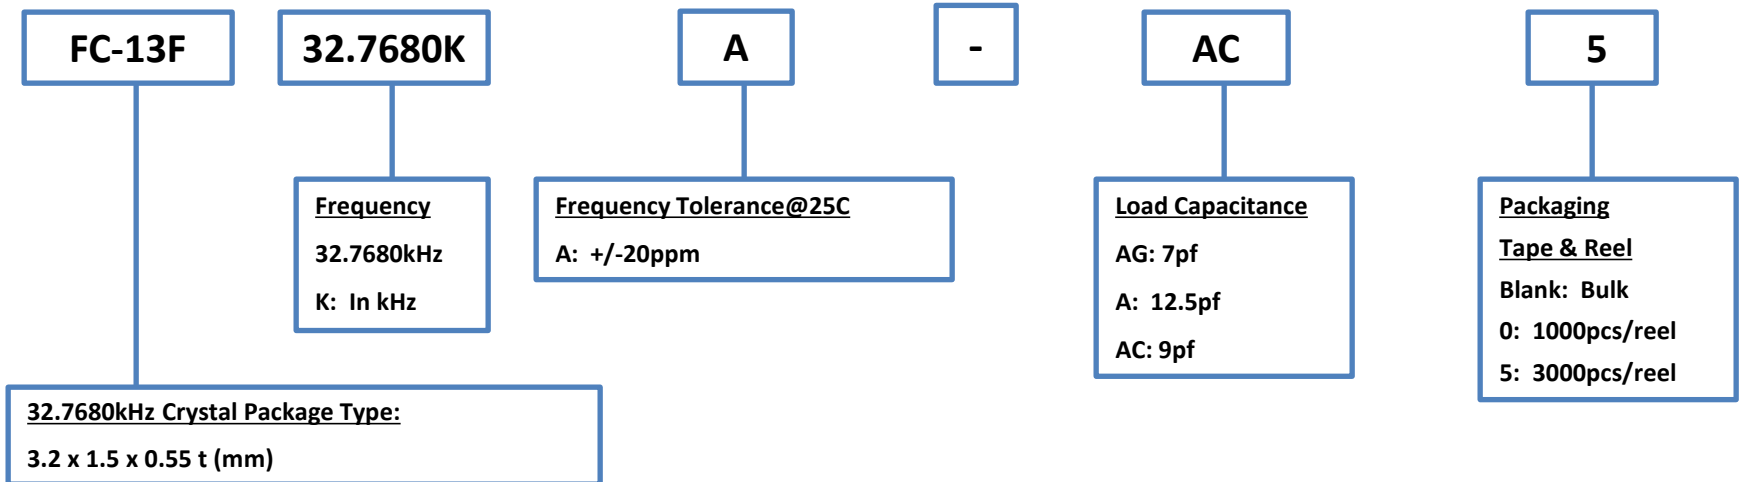


NOTES:

- 1) If you require a frequency or tolerance other than the above listed, please contact your Epson representative for assistance.

Product Configuration System



kHz Range Crystal Unit

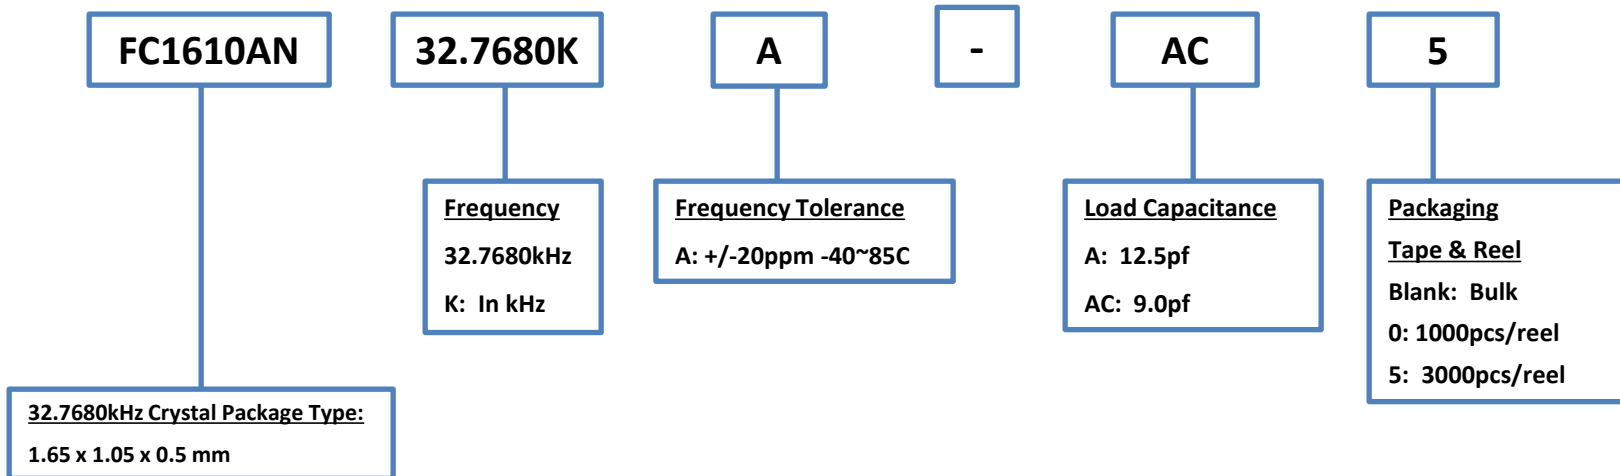


NOTES:

- 1) If you require a load capacitance other than the above listed, please contact your Epson representative for assistance.

Product Configuration System



kHz Range Crystals Units

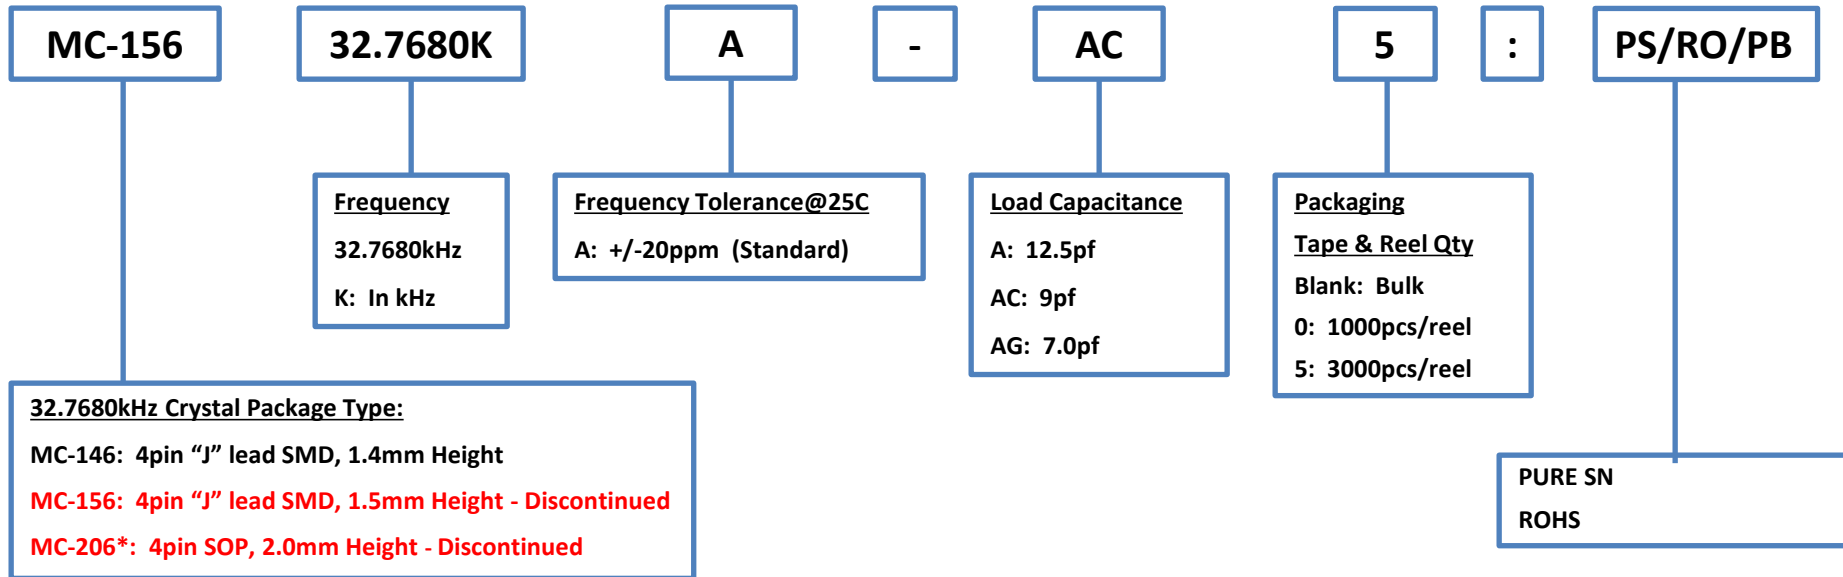


NOTES:

- 1) This product configuration guide is applicable only to 32.7680kHz Crystals. For other frequencies, please reference the Standard kHz Crystal Product Configuration System.
- 2) If you require a load capacitance other than the above listed, please contact your Epson representative for assistance.



Product Configuration System


kHz Range Crystals Units

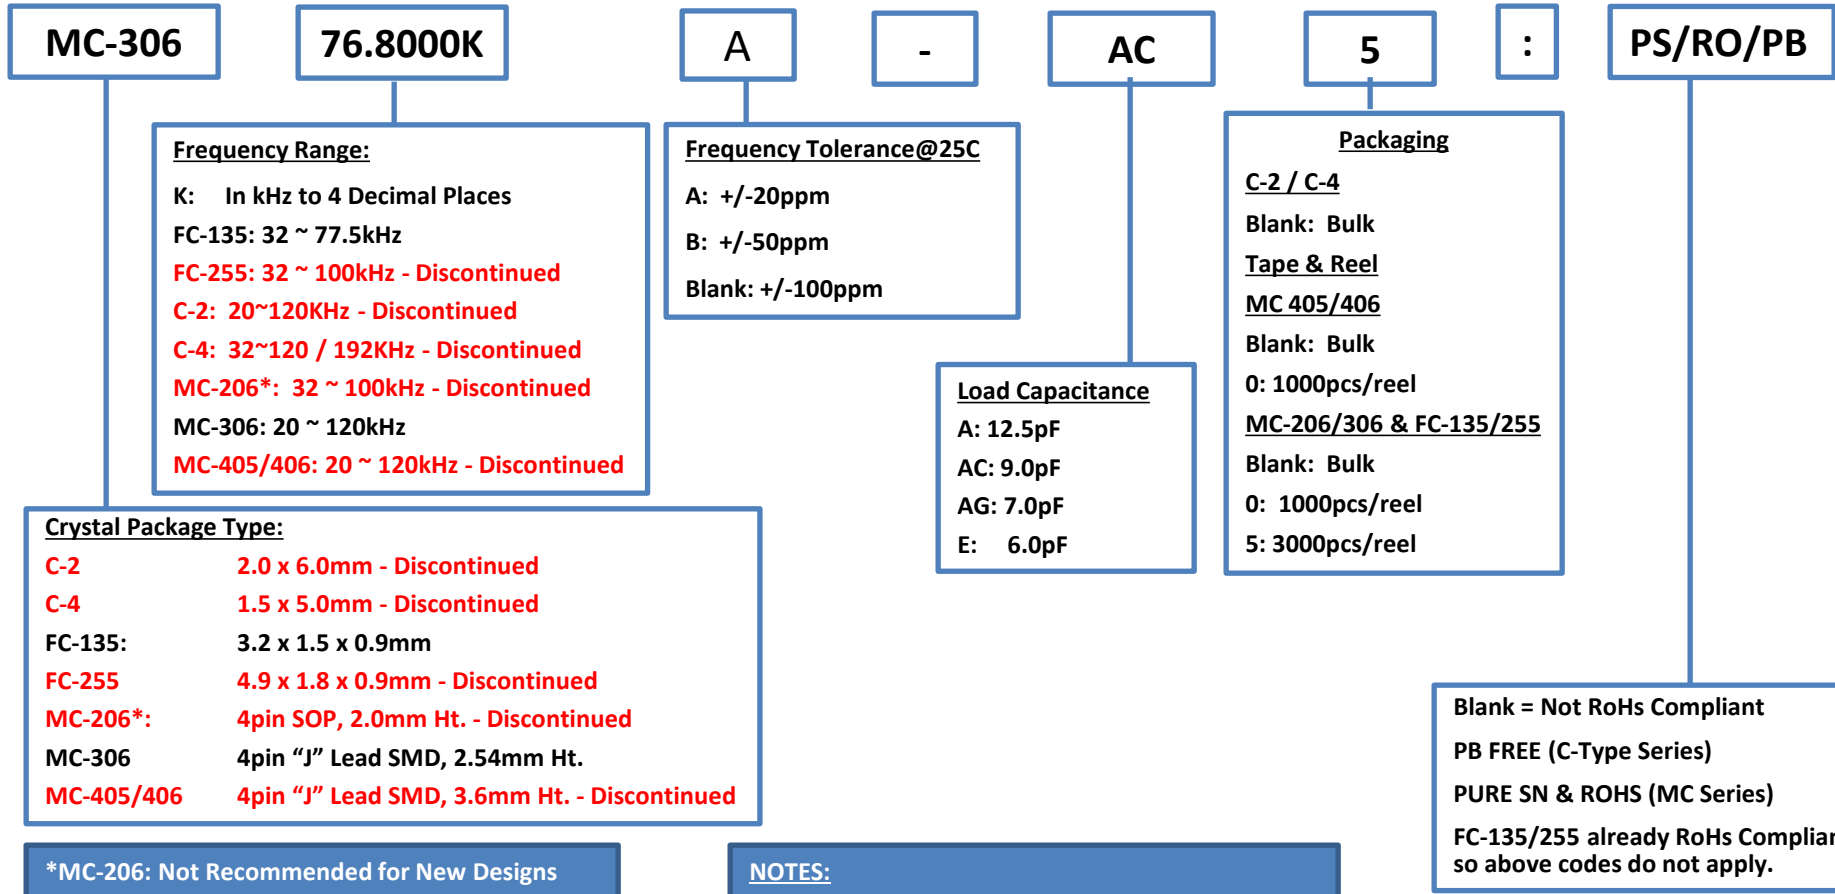

Product Configuration System



kHz Range Crystals Units

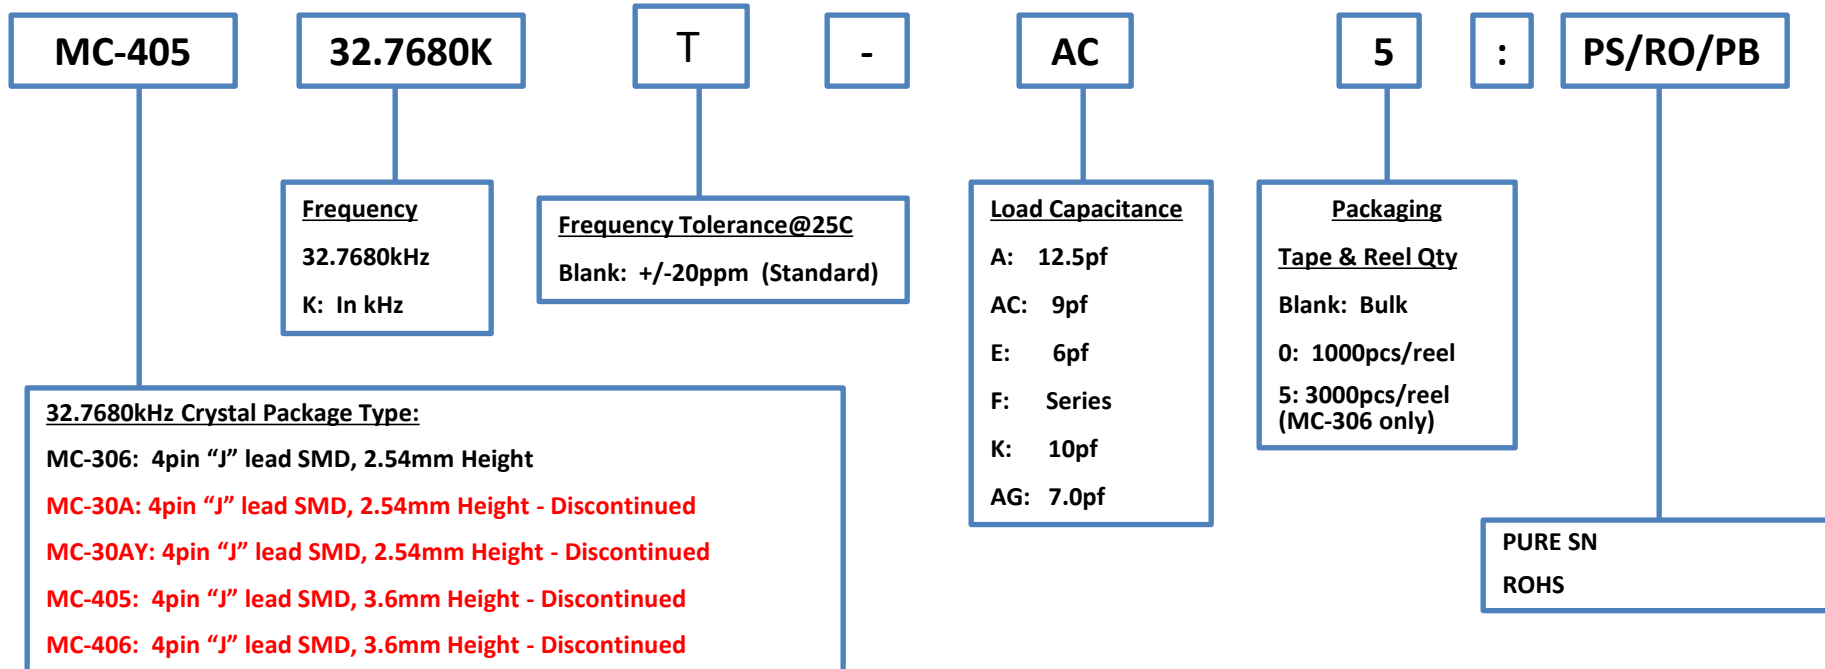

NOTES:

- 1) This product configuration guide is applicable only to 32.7680kHz Crystals. For other frequencies, please reference the Standard kHz Crystal Product Configuration System.
- 2) If you require a load capacitance other than the above listed, please contact your Epson representative for assistance.




Product Configuration System



kHz Range Crystals Units

Discontinued

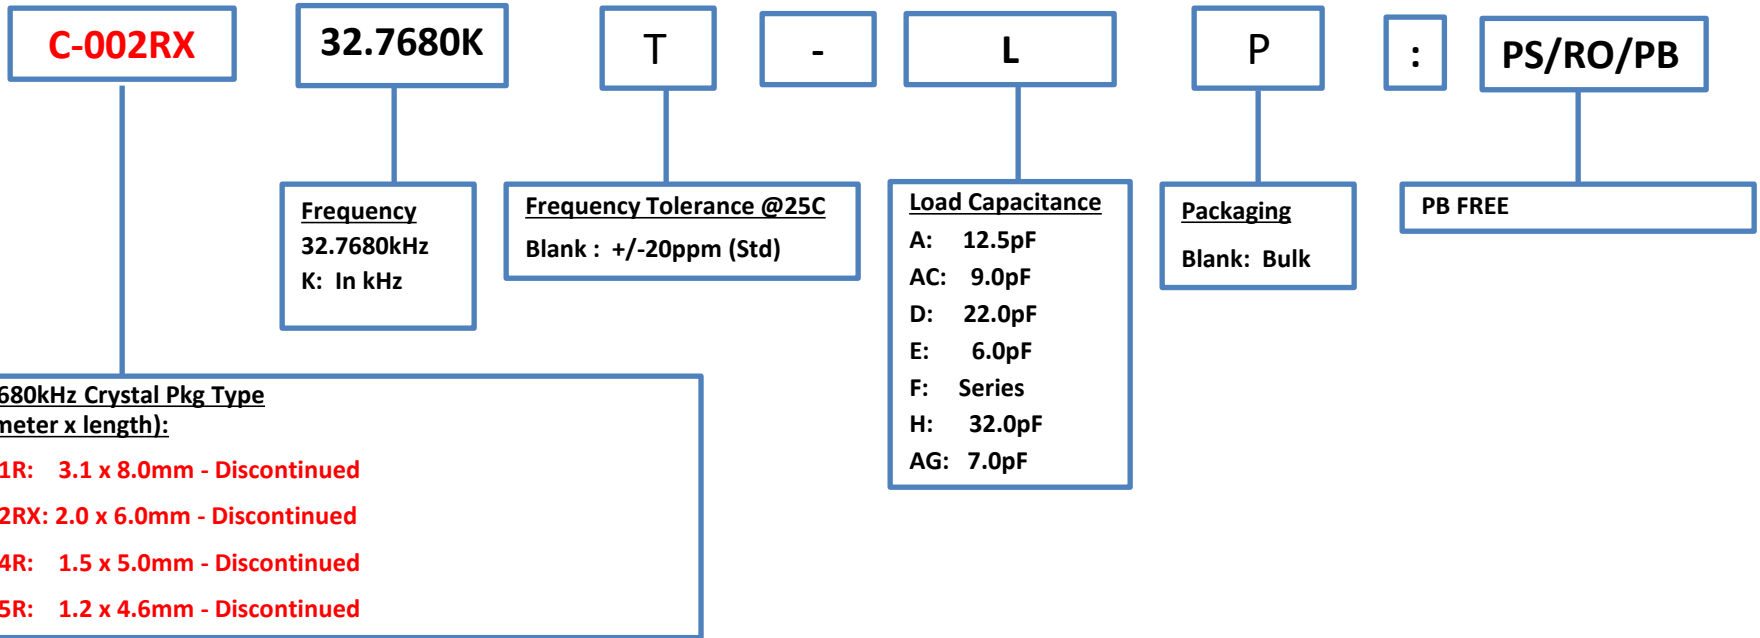

NOTES:


- 1) This product configuration guide is applicable only to 32.7680kHz crystals. For other frequencies, please refer to the Standard kHz Crystal Product Configuration System.
- 2) If you require a load capacitance other than the above listed, please contact your Epson representative for assistance.



Product Configuration System



MHz Range Crystals Units

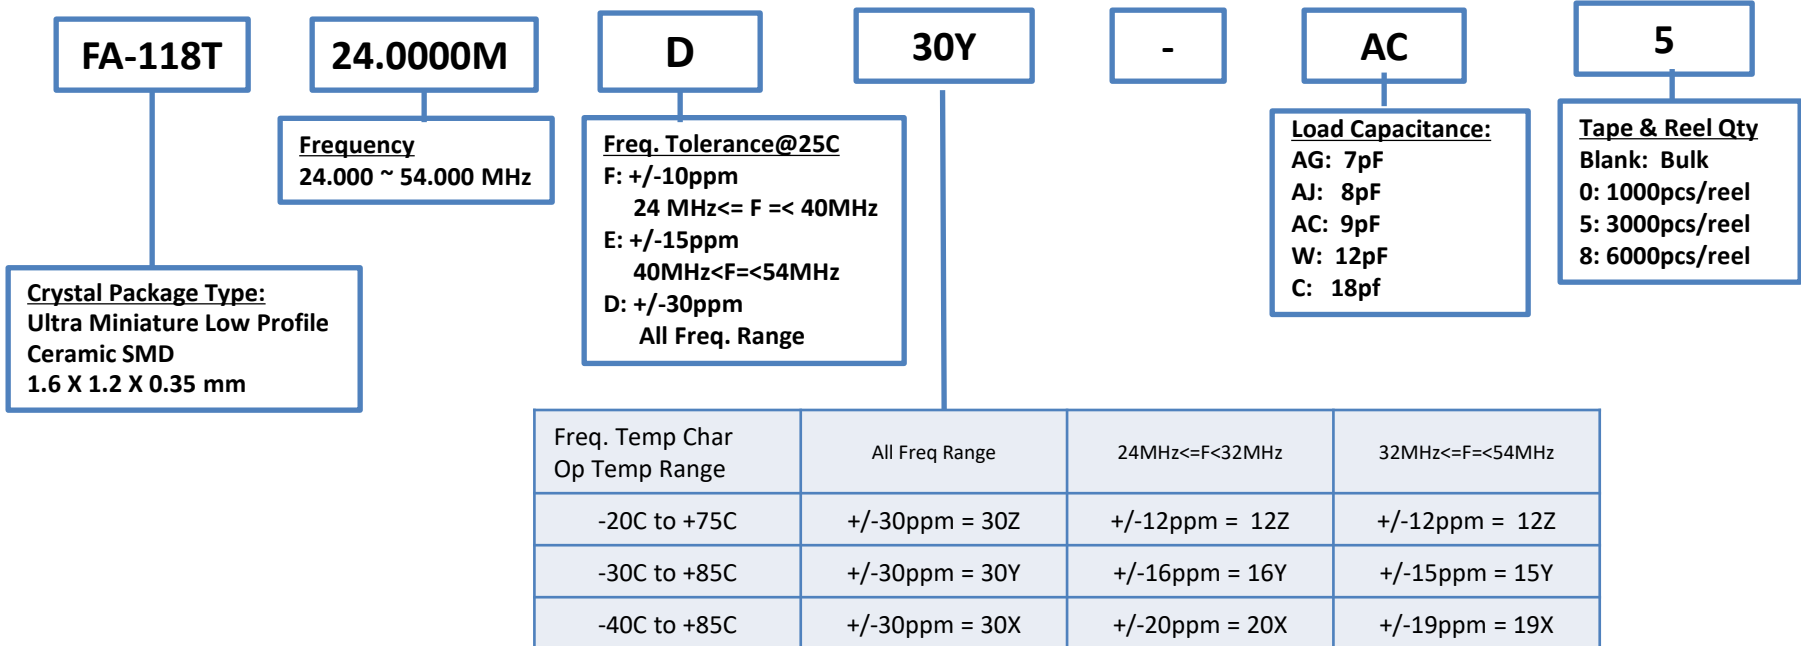


NOTES:

- 1) If you require frequency, tolerance, frequency temperature characteristics over temperature and load capacitance values other than the above listed, please contact your Epson representative for assistance.

Product Configuration System



MHz Range Crystal Units

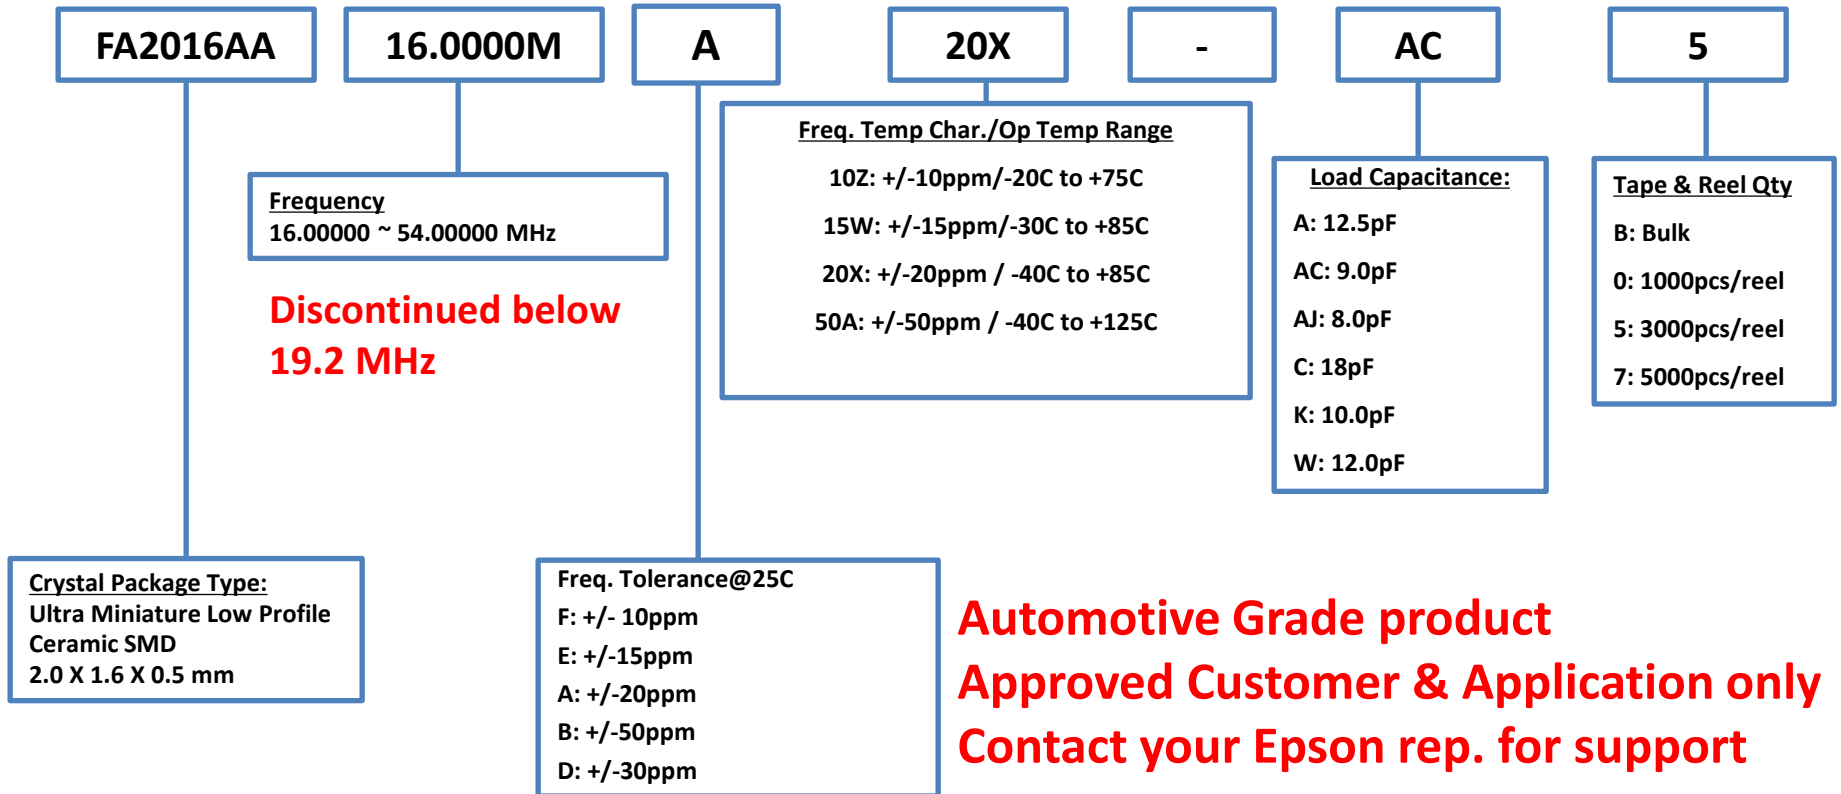

NOTES:

1) If you require frequency , tolerance, frequency temperature characteristics over temperature and load capacitance values other than the above listed, please contact your Epson representative for assistance.



Product Configuration System



MHz Range Crystal Units

NRND

FA2016AN

24.0000M

T

S

-

L

P

Frequency
24.00000 ~ 54.00000 MHz

Freq. Temp Char./Op Temp Range

10Z: +/-10ppm/-20C to +75C
30Z: +/-30ppm / -20C to +75C
14Y: +/-14ppm / -30C to +85C
50Y +/-50ppm / -30C to 85C

Load Capacitance:

A: 12.5pF
E: 6.pf
K: 10.0pF
W: 12.0pF

Tape & Reel Qty

B: Bulk
3: 250pcs/reel
0: 1000pcs/reel
5: 3000pcs/reel

Crystal Package Type:
Ultra Miniature Low Profile
Ceramic SMD
2.0 X 1.6 X 0.5 mm

Freq. Tolerance@25C
F: +/- 10ppm, 24<= F =<40MHz
E: +/-15ppm, 40<= F =<54MHz
D: +/-30ppm , All Freq. Range

NOTES:


- 1) If you require frequency , tolerance, frequency temperature characteristics over temperature and load capacitance values other than the above listed, please contact your Epson representative for assistance.

Product Configuration System



MHz Range Crystal Units

Non Promotional

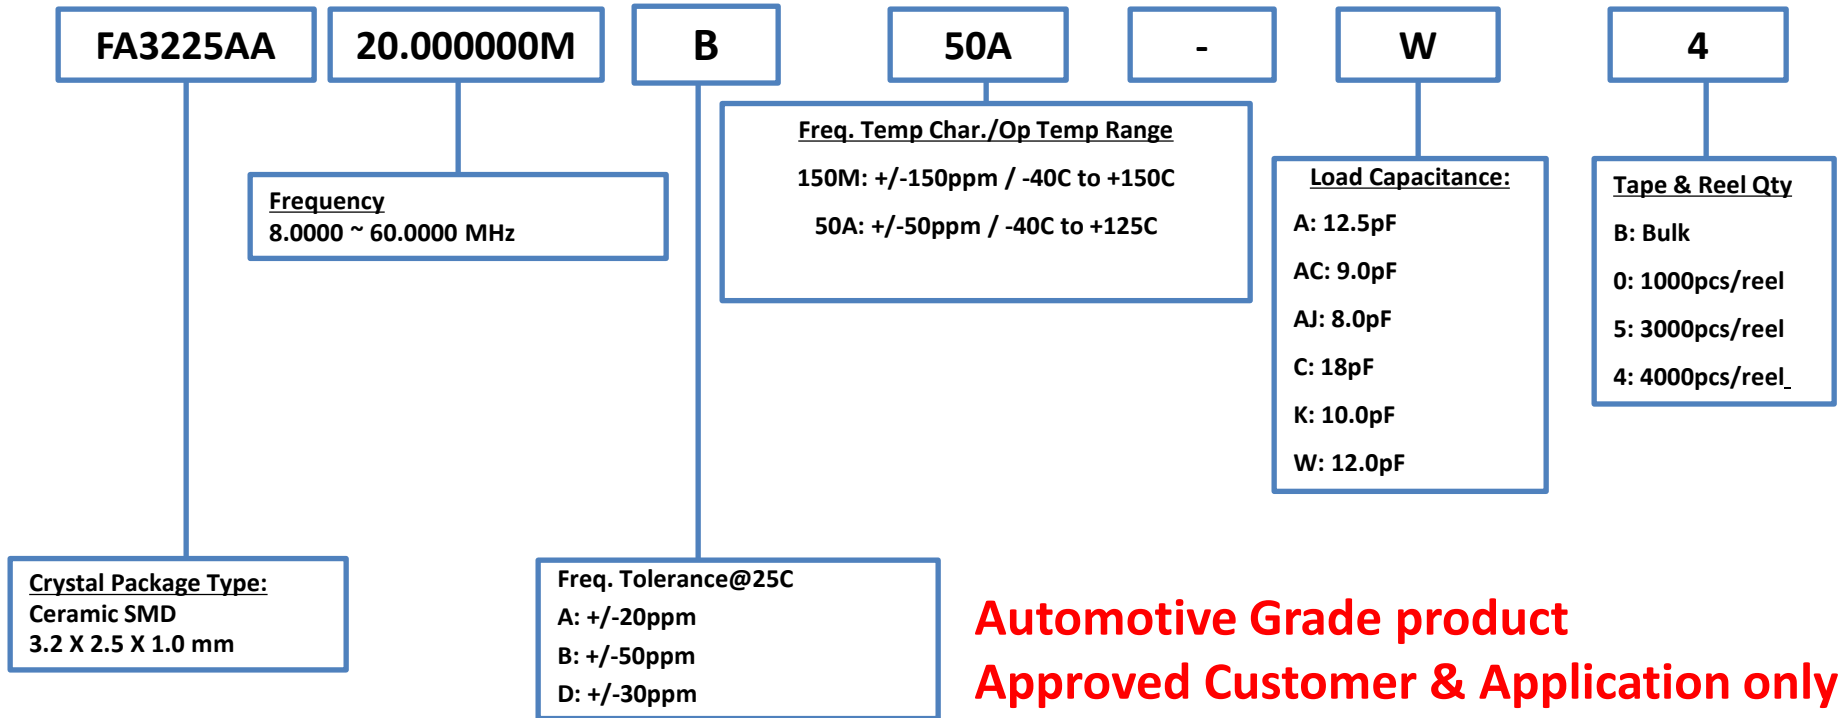

Automotive Grade product
Approved Customer & Application only
Contact your Epson rep. for support


NOTES:

- 1) If you require frequency, tolerance, frequency temperature characteristics over temperature and load capacitance values other than the above listed, please contact your Epson representative for assistance.

Product Configuration System



MHz Range Crystals Units

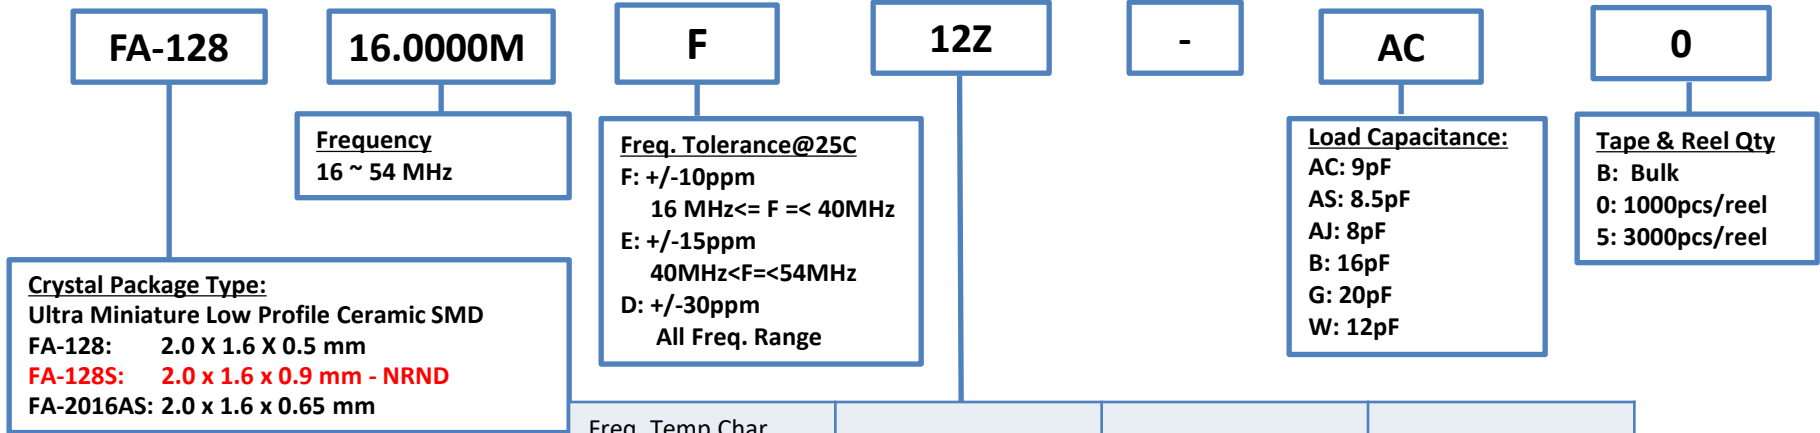

Freq. Temp Char Op Temp Range	All Freq Range	16MHz<=F=<20MHz	20MHz<F=54MHz
-20C to +75C	+/-20ppm = 20Z	+/-12ppm = 12Z	+/-10ppm = 10Z
-20C to +80C	+/-20ppm = 20K	+/-12ppm = 12K	+/-10ppm = 10K
-20C to +85C	+/-20ppm = 20P	+/-12ppm = 12P	+/-12ppm = 12P
-30C to +70C	+/-28ppm = 28R	+/-17ppm = 17R	+/-14ppm = 14R
-30C to +75C	+/-28ppm = 28E	+/-17ppm = 17E	+/-14ppm = 14E
-30C to +80C	+30ppm = 30W	+/-17ppm = 17W	+/-14ppm = 14W
-30C to +85C	+/-30ppm = 30Y	+/-17ppm = 17Y	+/-14ppm = 14Y
-30C to +85C	+/-50ppm = 50Y	+/-17ppm = 17Y	+/-14ppm = 14Y
-40C to +85C	+/-40ppm = 40X	+/-22ppm = 22X	+/-20ppm = 20X

NOTE: 81Z = +/-10ppm / -20C to +75C




NOTES:

- 1) If you require frequency, tolerance, frequency temperature characteristics over temperature and load capacitance values other than the above listed, please contact your Epson representative for assistance.

Product Configuration System



MHz Range Crystals Units

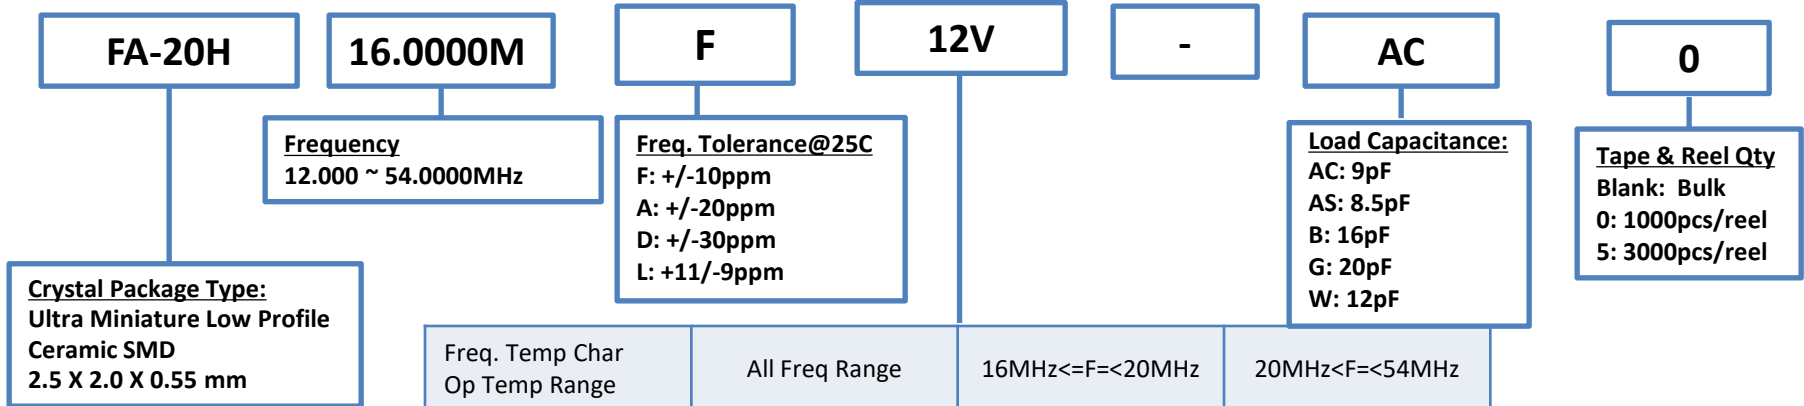

Freq. Temp Char Op Temp Range	All Freq Range	16MHz<=F<20MHz	20MHz<F<54MHz
-20C to +70C	+/-20ppm = 20V	+/-12ppm = 12V	+/-10ppm = 10V
-20C to +70C	+/-30ppm = 30V	+/-12ppm = 12V	+/-10ppm = 10V
-20C to +75C	+/-20ppm = 20Z	+/-12ppm = 12Z	+/-10ppm = 10Z
-20C to +80C	+/-20ppm = 20K	+/-12ppm = 12K	+/-10ppm = 10K
-20C to +85C	+/-20ppm = 20P	+/-12ppm = 12P	+/-12ppm = 12P
-30C to +70C	+/-28ppm = 28R	+/-17ppm = 17R	+/-14ppm = 14R
-30C to +75C	+/-28ppm = 28E	+/-17ppm = 17E	+/-14ppm = 14E
-30C to +80C	+/-30ppm = 30W	+/-17ppm = 17W	+/-14ppm = 14W
-30C to +85C	+/-30ppm = 30Y	+/-17ppm = 17Y	+/-14ppm = 14Y
-30C to +85C	+/-50ppm = 50Y	+/-17ppm = 17Y	+/-14ppm = 14Y
-40C to +85C	+/-40ppm = 40X	+/-22ppm = 22X	+/-20ppm = 20X

NOTE: 81Z = +8/-10ppm / -20C to +75C




NOTES:

1) If you require frequency, tolerance, frequency temperature characteristics over temperature and load capacitance values other than the above listed, please contact your Epson representative for assistance.

Product Configuration System



MHz Range Crystal Units

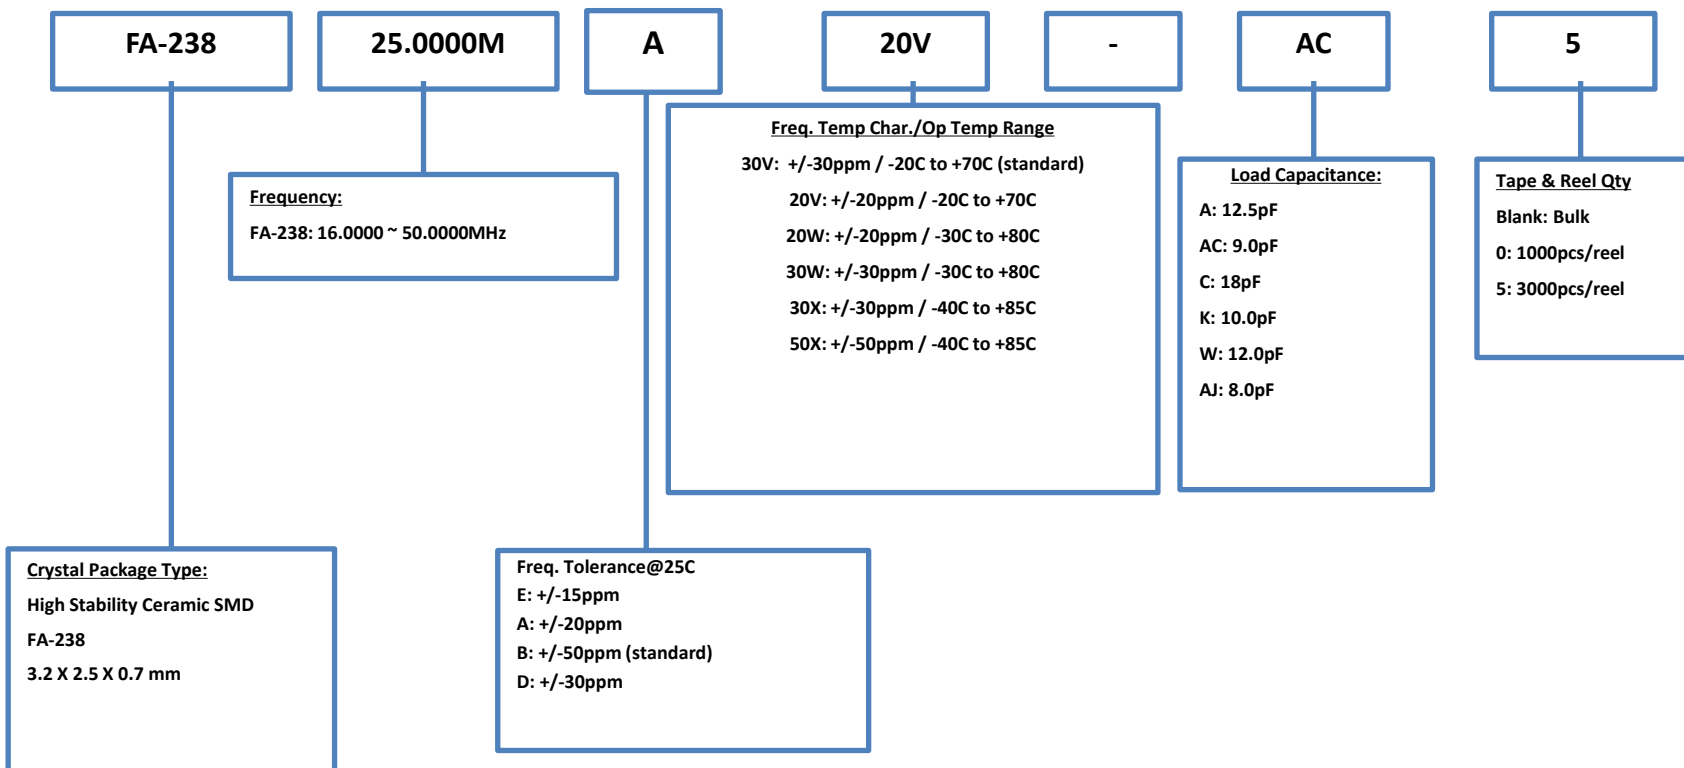

NOTES:


- 1) If you require frequency, tolerance, frequency temperature characteristics over temperature and load capacitance values other than the above listed, please contact your Epson representative for assistance.



Product Configuration System



MHz Range Crystal Units

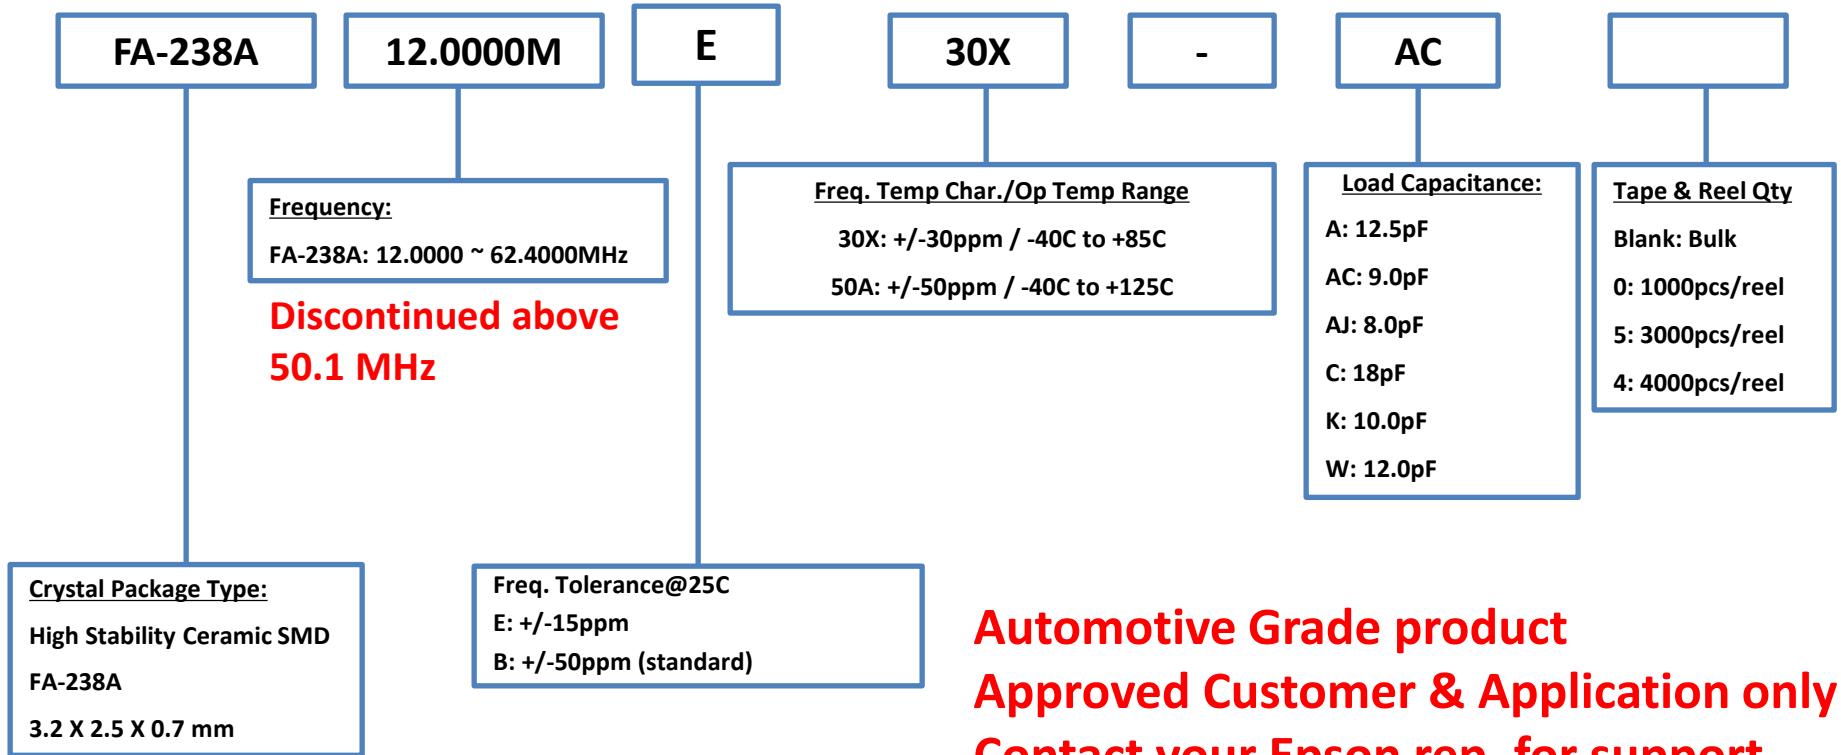

**Automotive Grade product
Approved Customer & Application only
Contact your Epson rep. for support**

NOTES:


- 1) If you require frequency , tolerance, frequency temperature characteristics over temperature and load capacitance values other than the above listed, please contact your Epson representative for assistance.



Product Configuration System



MHz Range Crystal Units

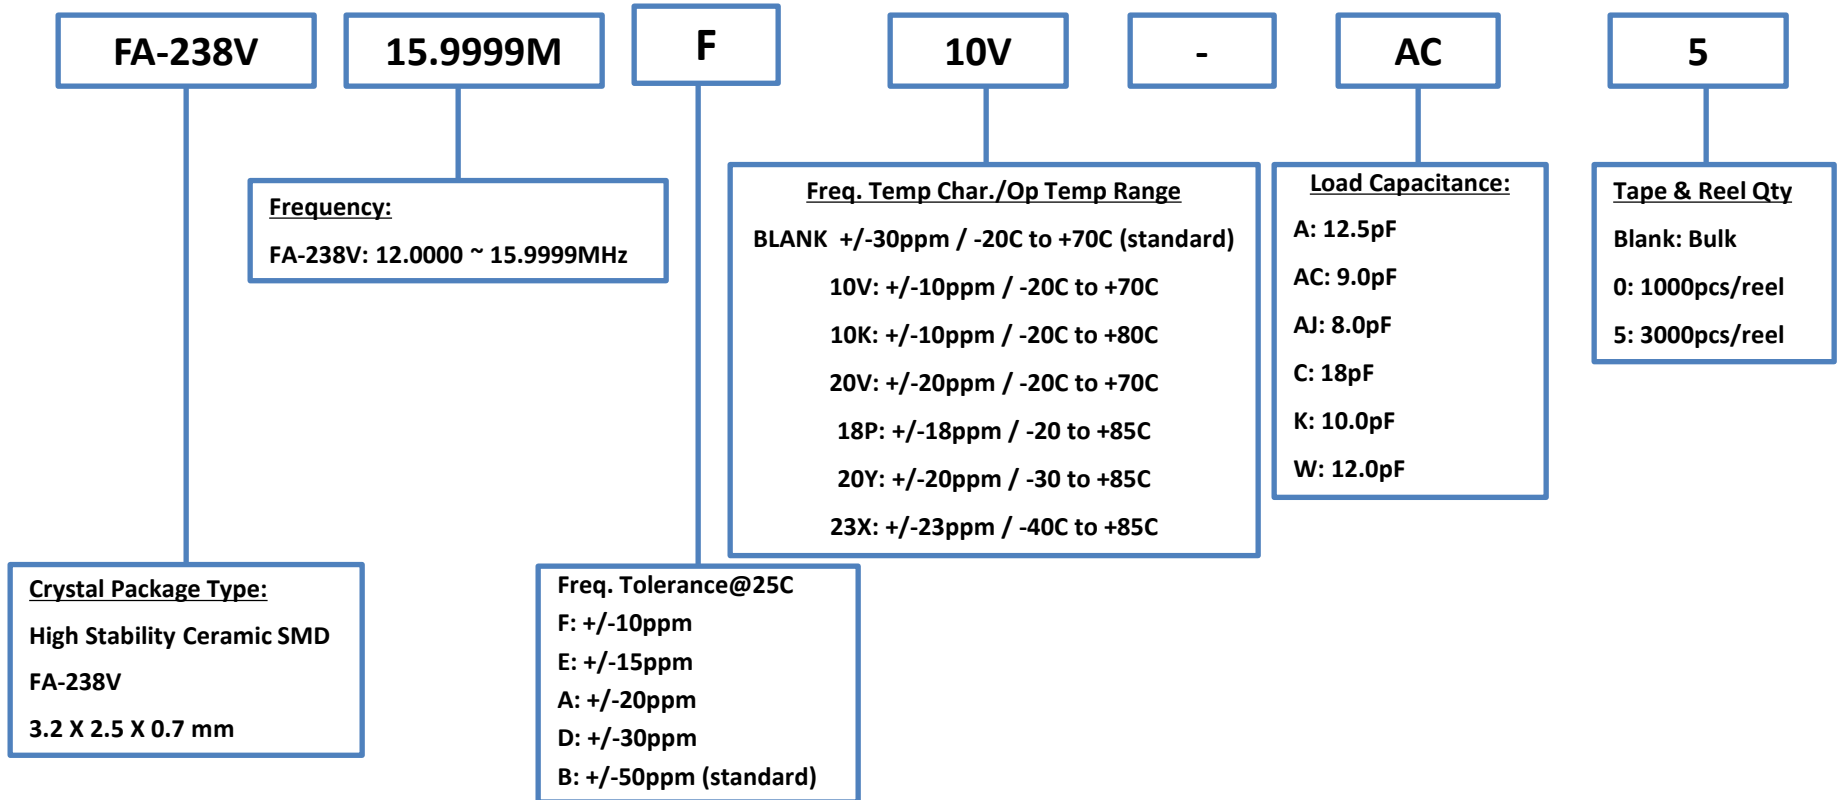

NOTES:


1) If you require frequency , tolerance, frequency temperature characteristics over temperature and load capacitance values other than the above listed, please contact your Epson representative for assistance.



Product Configuration System



MHz Range Crystal Units

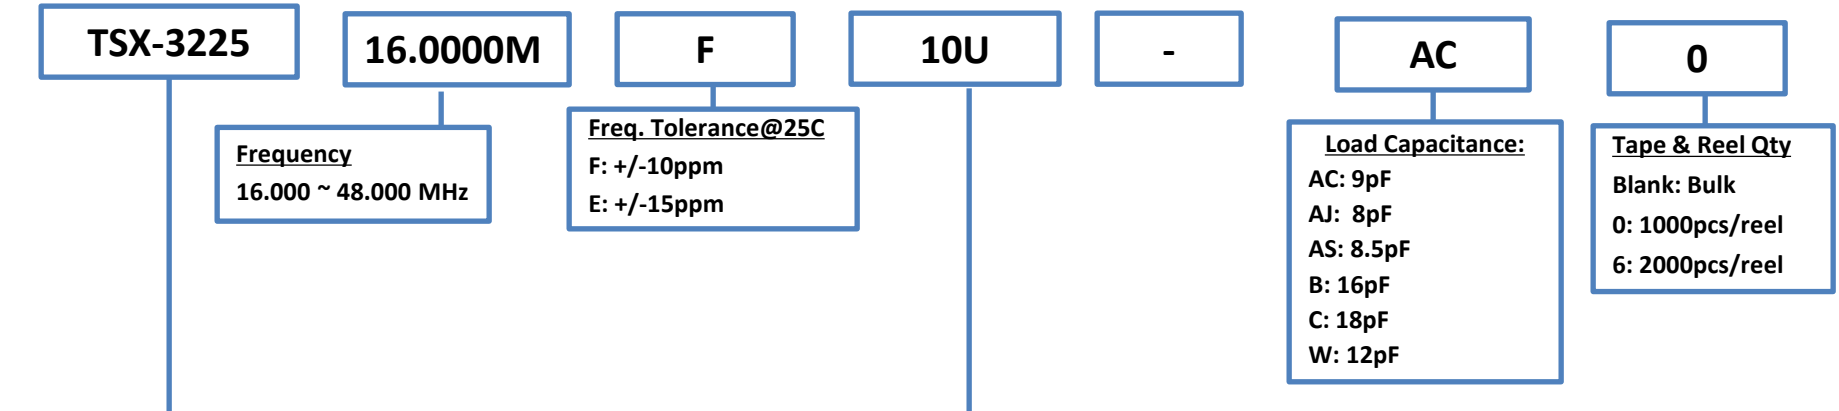

Crystal Package Type:
 Miniature Size Low Profile Ceramic SMD
 3.2 X 2.5 X 0.6 mm

Freq. Temp Char Op Temp Range	16MHz<=F=<26.99MHz	27MHz<F=<48MHz
-10C to 60C	+/-10ppm = 10U	+/-10ppm = 10U
-20C to +75C	+/-9ppm = 09Z	+/-9ppm = 09Z (for <40MHz)
-20C to +75C	+/-10ppm = 10Z	+/-10ppm = 10Z
-20C to +85C	+/-10ppm = 10P	+/-10ppm = 10P
-30C to +85C	+/-13ppm = 13Y	+/-15ppm = 15Y
-40C to +85C	+/-18ppm = 18X	+/-18ppm = 18X
-40C to +105C	+/-20ppm = 20G (for 20MHz and 24MHz only)	



NOTES:


1) If you require frequency, tolerance, frequency temperature characteristics over temperature and load capacitance values other than the above listed, please contact your Epson representative for assistance.

Product Configuration System



MHz Range Crystal Units

Discontinued

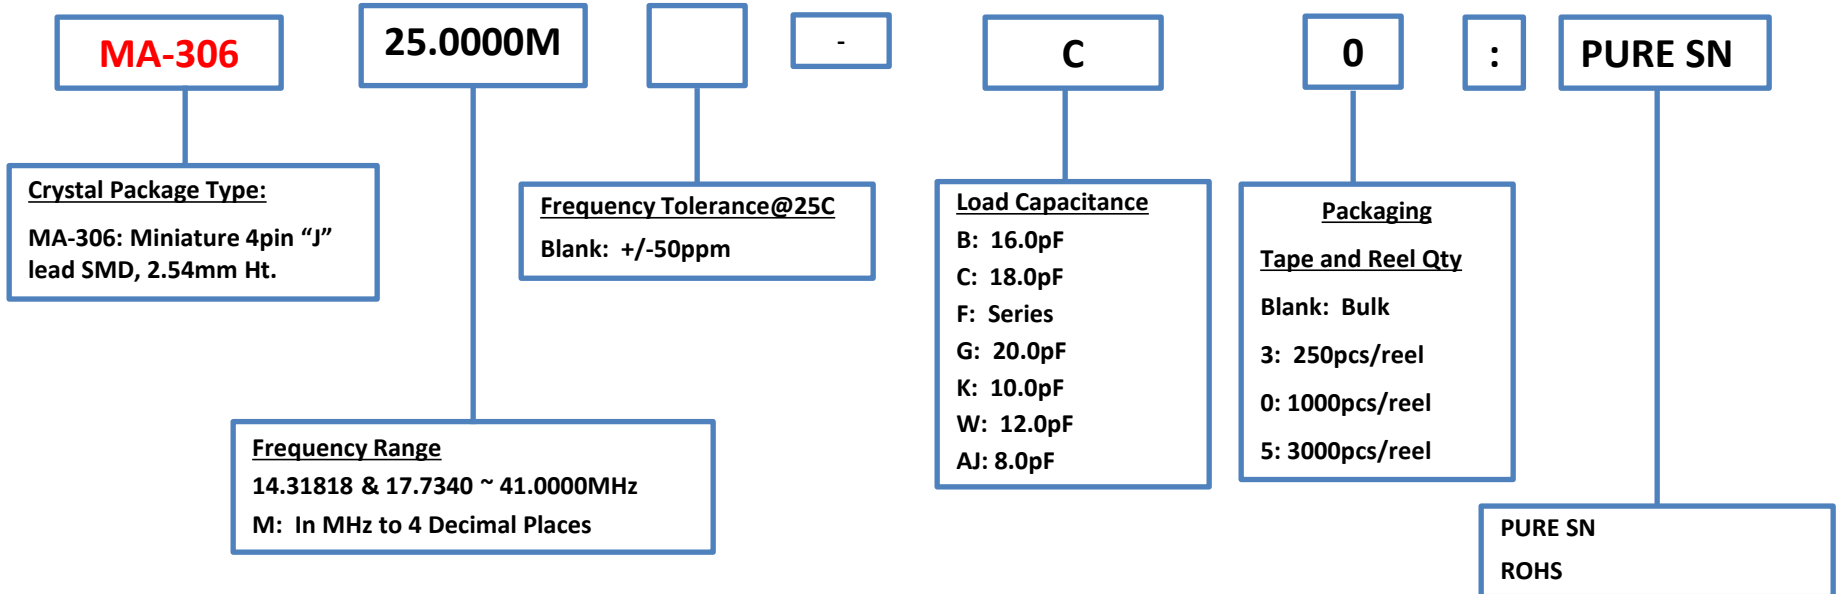

NOTES:


- 1) If you require frequency, tolerance, frequency temperature characteristics over temperature and load capacitance values other than the above listed, please contact your Epson representative for assistance.

Product Configuration System



MHz Range Crystal Units

Discontinued

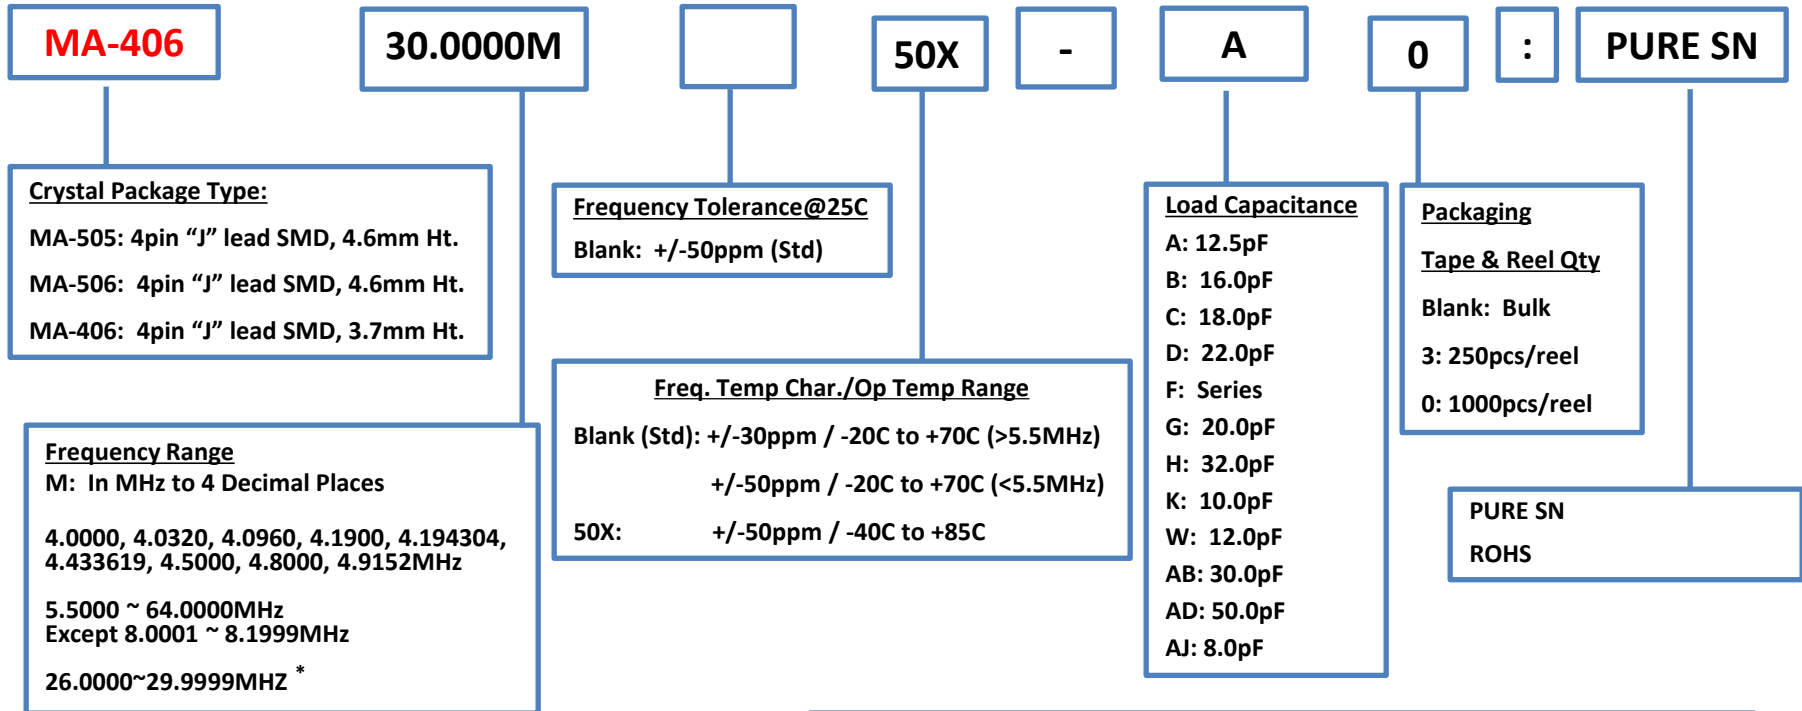

NOTES:

- 1) If you require frequency, tolerance, frequency temperature characteristics over temperature and load capacitance values other than the above listed, please contact your Epson representative for assistance.
- 2) For frequencies between 26.0000MHz and 29.9999MHz, please specify "(FUND)" at end of part number if fundamental mode required. Otherwise, 3rd Overtone is default.




Product Configuration System



MHz Range Crystal Units

Discontinued

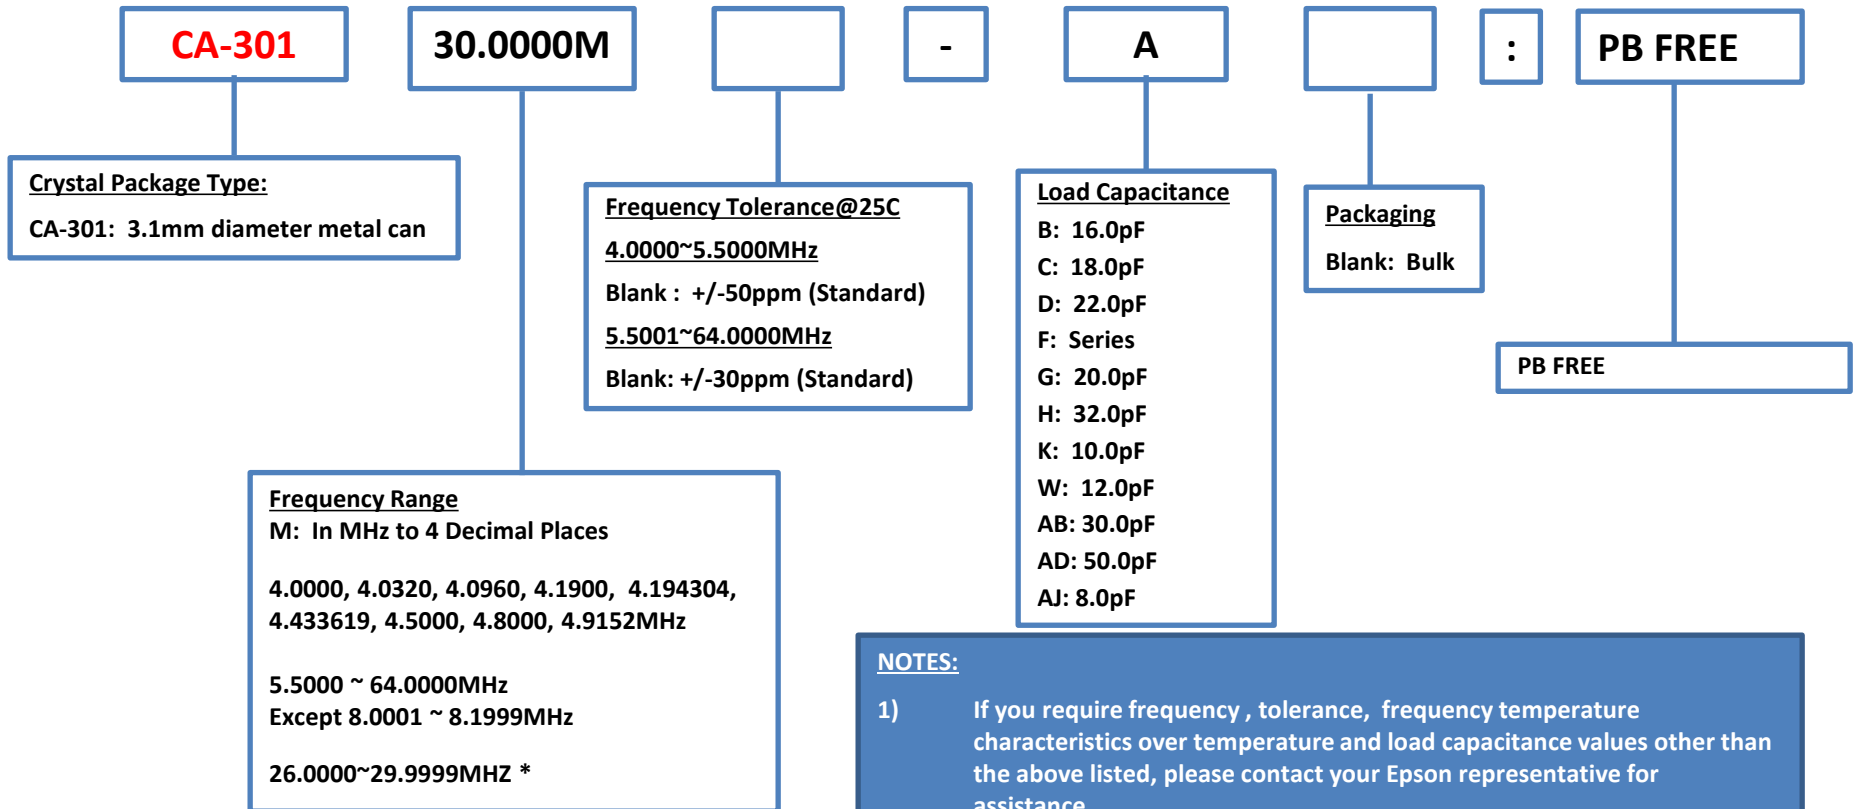

- NOTES:**
- 1) If you require frequency , tolerance, frequency temperature characteristics over temperature and load capacitance values other than the above listed, please contact your Epson representative for assistance.
 - 2) For frequencies between 26.0000MHz and 29.9999MHz, please specify “(FUND)” at end of part number if fundamental mode required. Otherwise, 3rd Overtone is default.



Product Configuration System

Crystal Units Load Cap Codes and Values (as of March 2014)

Load Cap Code	Load Cap Value
AZ	3.5
VJ	4.0
EE	4.4
AT	4.8
X	5.0
JJ	5.4
E	6.0
FF	6.4
DD	6.5
VC	6.7
AG	7.0
AR	7.1
JK	7.4
VB	7.6
AN	7.8
AJ	8.0
AS	8.5
CC	8.7
GG	8.8
AC	9.0
AM	9.2

Load Cap Code	Load Cap Value
AL	9.5
S	9.6
VF	9.8
K	10.0
HH	10.4
AK	10.5
AP	10.7
P	11.0
AY	11.2
AW	11.5
W	12.0
A	12.5
T	13.0
N	13.5
Y	14.0
VH	14.5
R	15.0
B	16.0
AV	17.0
C	18.0
L	18.3

Load Cap Code	Load Cap Value
J	18.5
AQ	19.0
G	20.0
AF	21.5
D	22.0
AU	22.5
AE	22.9
AH	23.0
V	24.0
AI	25.0
Z	26.0
AA	27.0
Q	28.0
AB	30.0
H	32.0
I	33.0
U	47.0
AD	50.0
M	100.0
F	Series

Product Configuration Guide

OSCILLATORS




- SPXO
- Programmable
- Spread Spectrum
- High Stability



Product Configuration System



Crystal Oscillators - SPXO

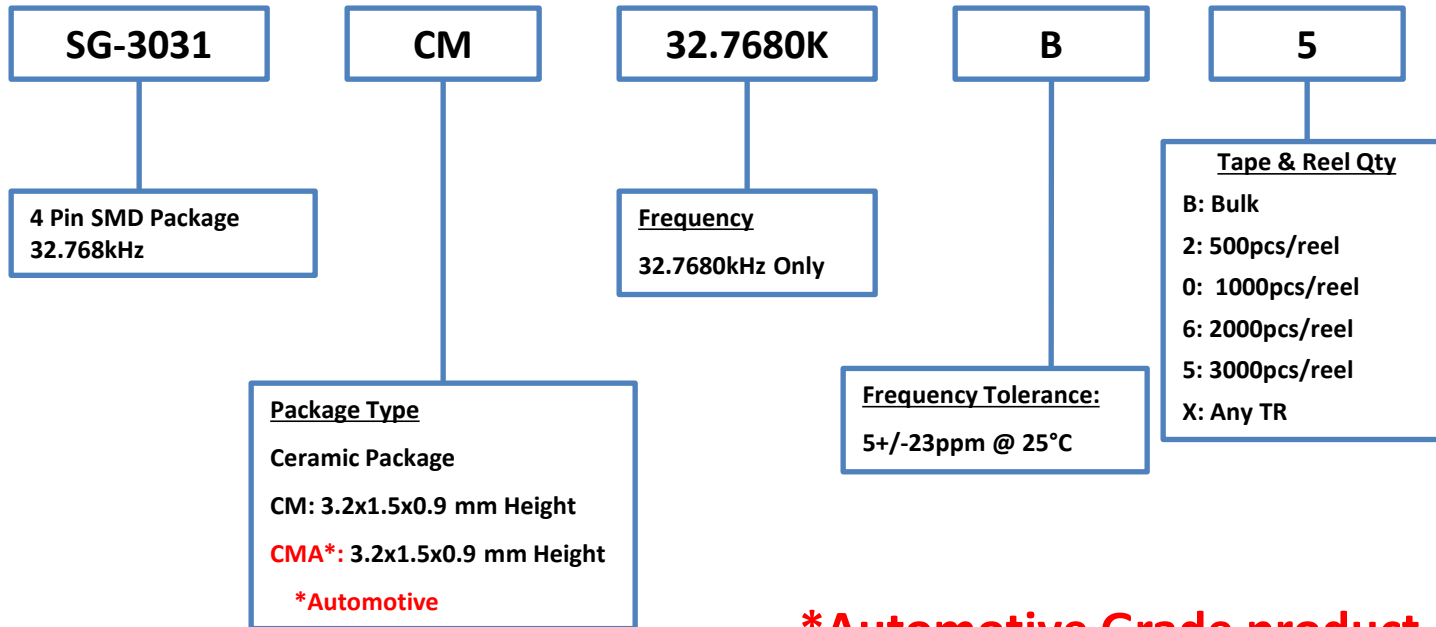

***Automotive Grade product
Approved Customer & Application only
Contact your Epson rep. for support**

EPSON

August 2024

NOTE:


Please contact us for requirements not listed in this specification.

Product Configuration System



Crystal Oscillators - SPXO

Discontinued

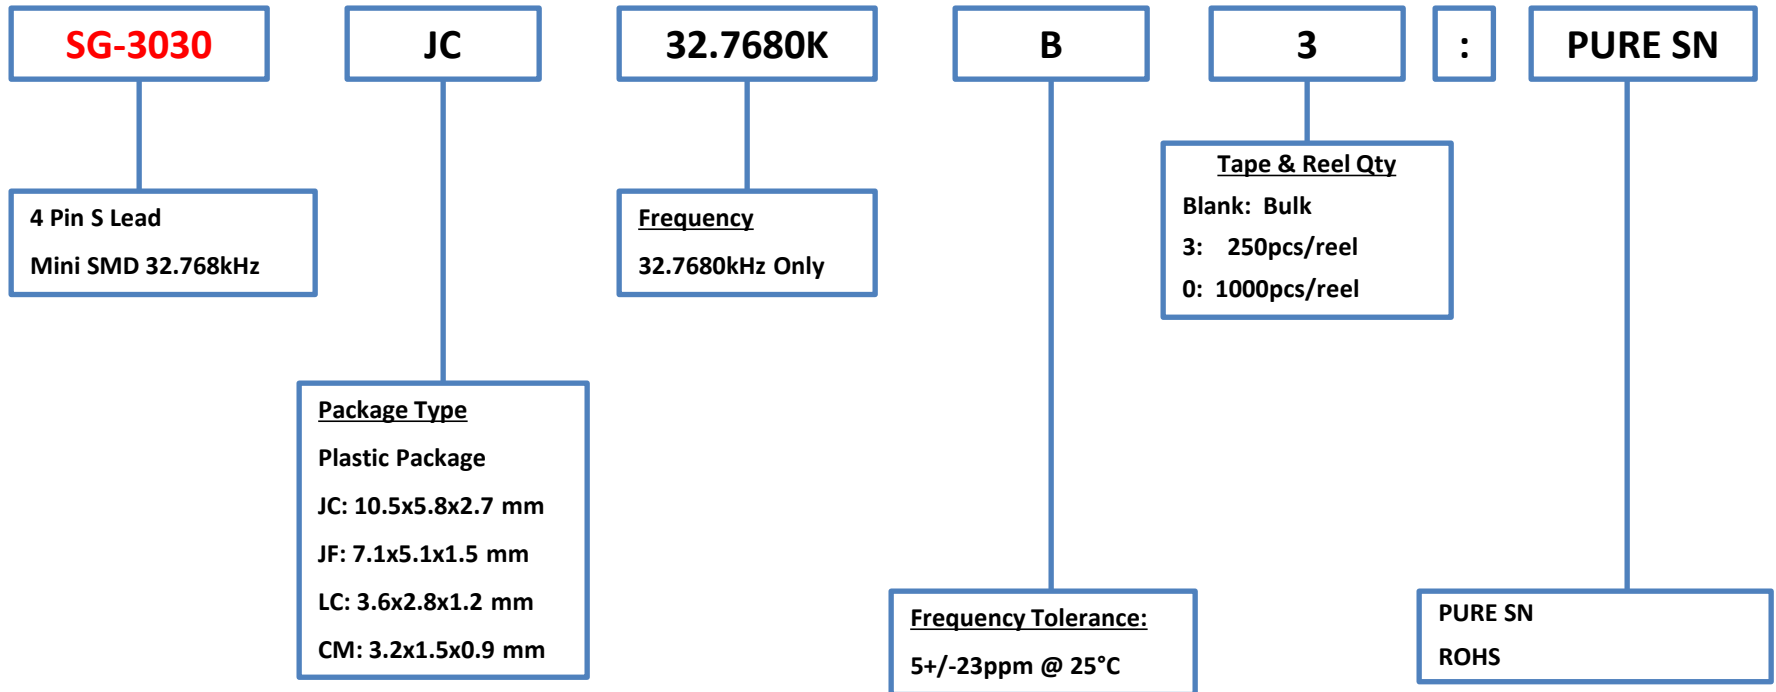


Note: All LC packages are RoHS Compliant, Pure SN

Product Configuration System



Crystal Oscillators - SPXO

Discontinued

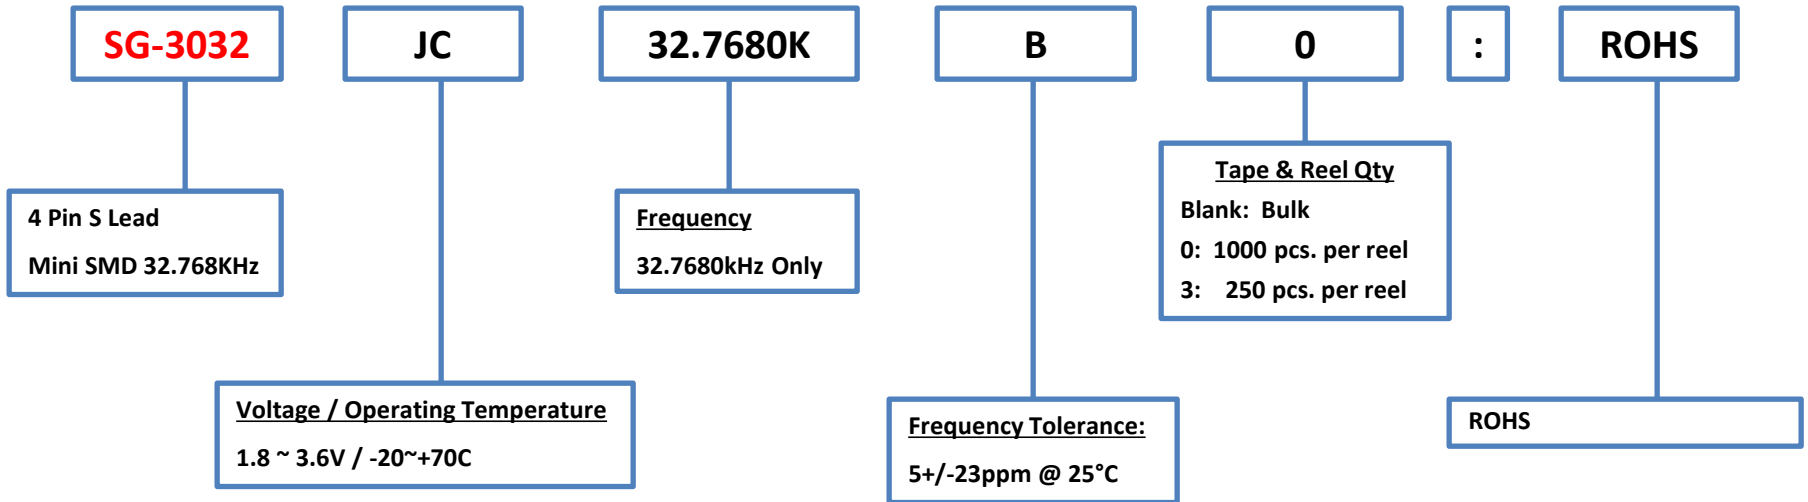


Product Configuration System



Crystal Oscillators - SPXO

Discontinued

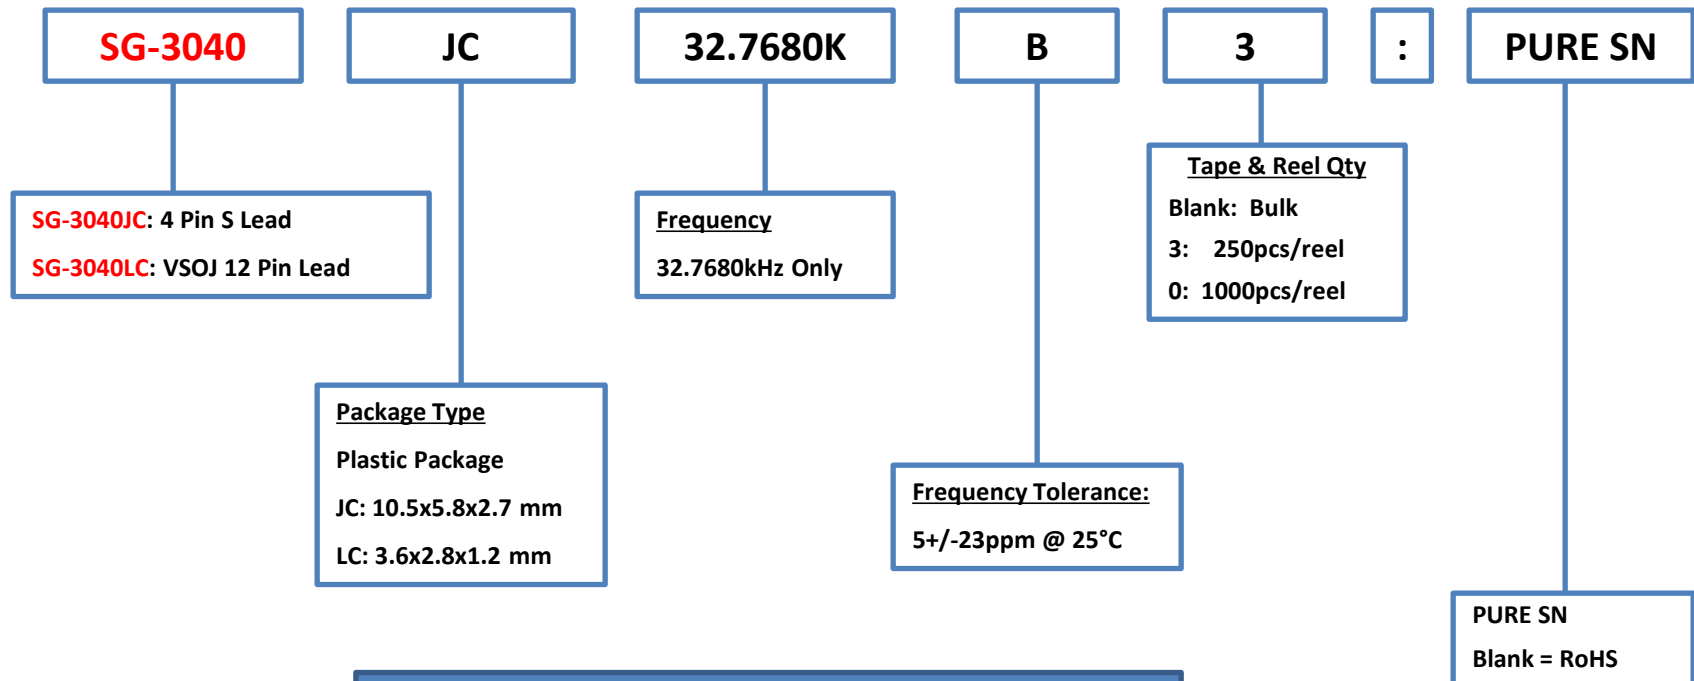


Note: All LC packages are RoHS Compliant, Pure SN

Product Configuration System



Crystal Oscillators - SPXO

Discontinued

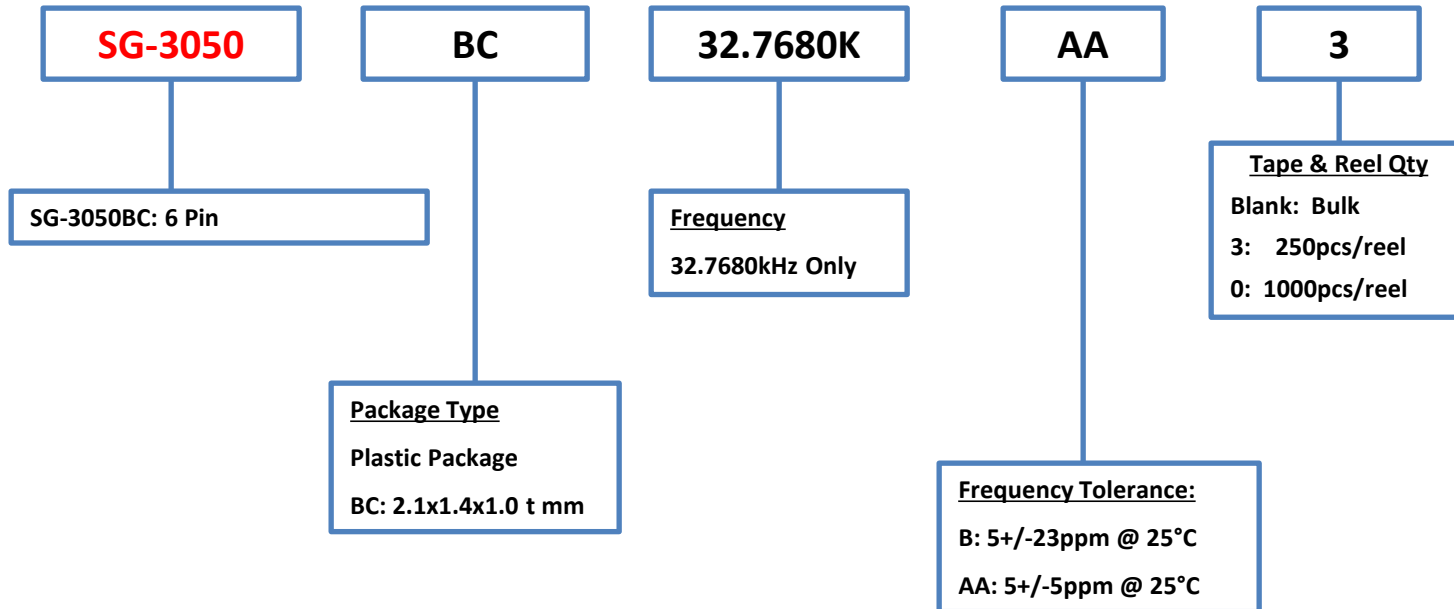


Product Configuration System



Crystal Oscillators - SPXO

Discontinued

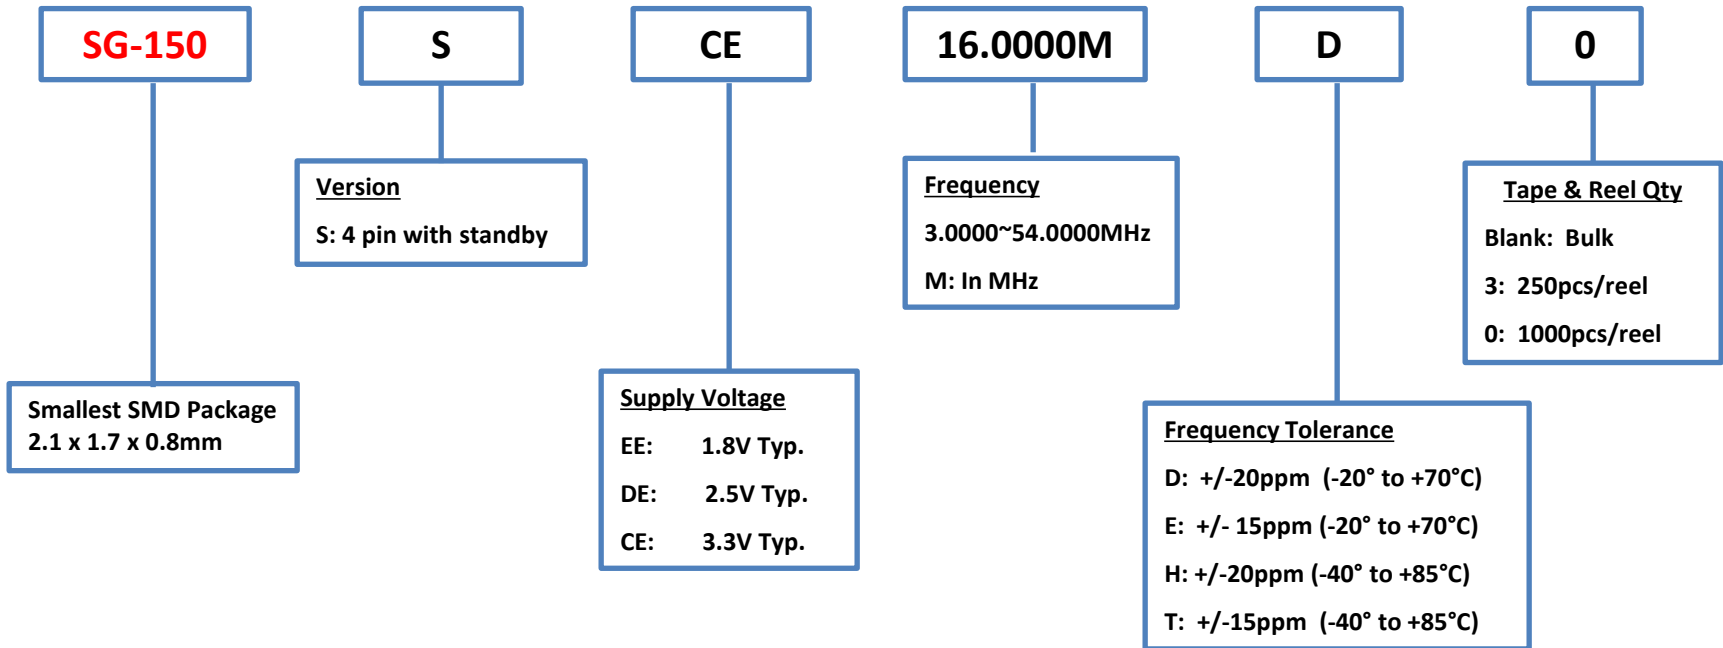


Product Configuration System



Crystal Oscillators - SPXO

Discontinued

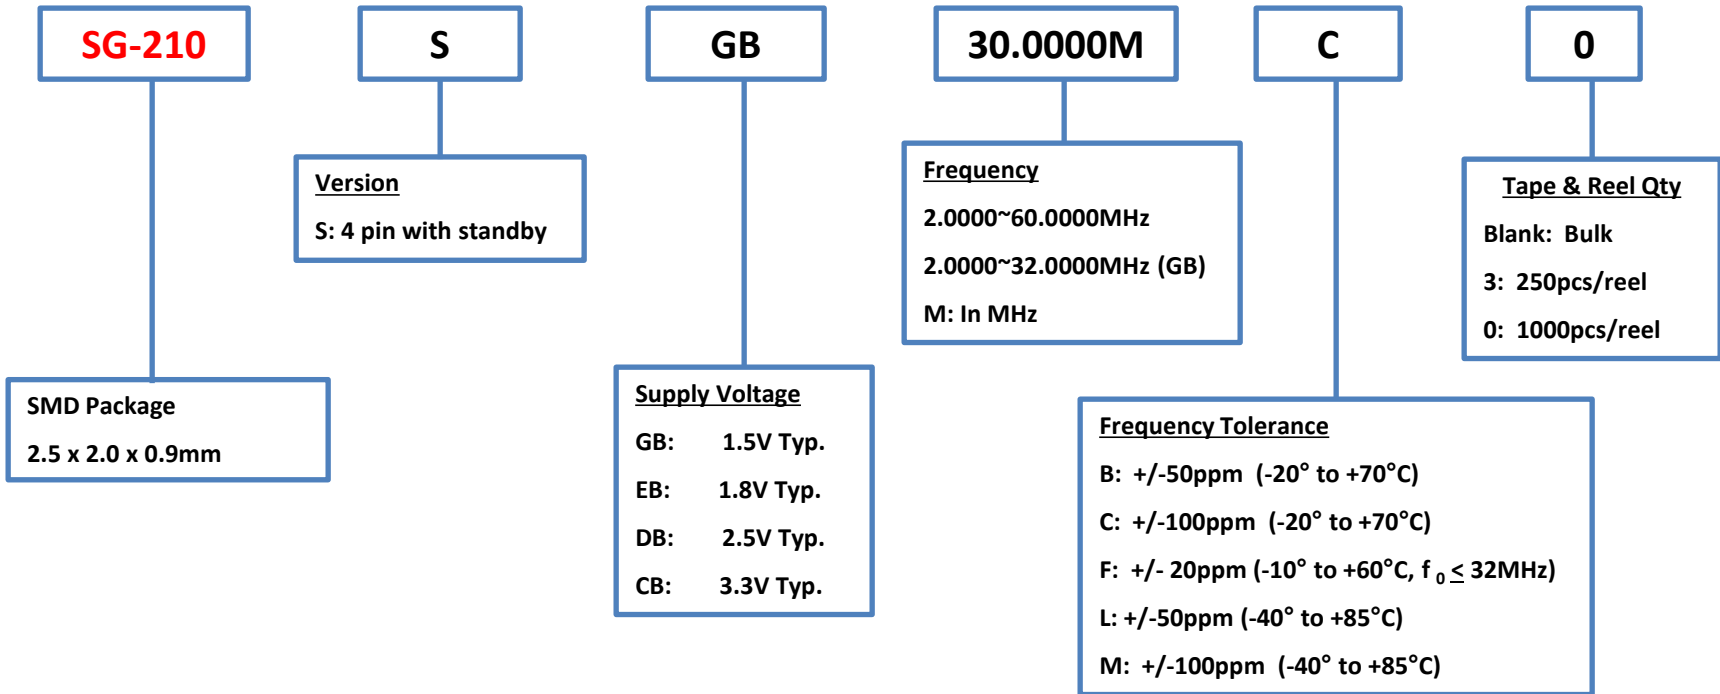


Product Configuration System



Crystal Oscillators - SPXO

Discontinued

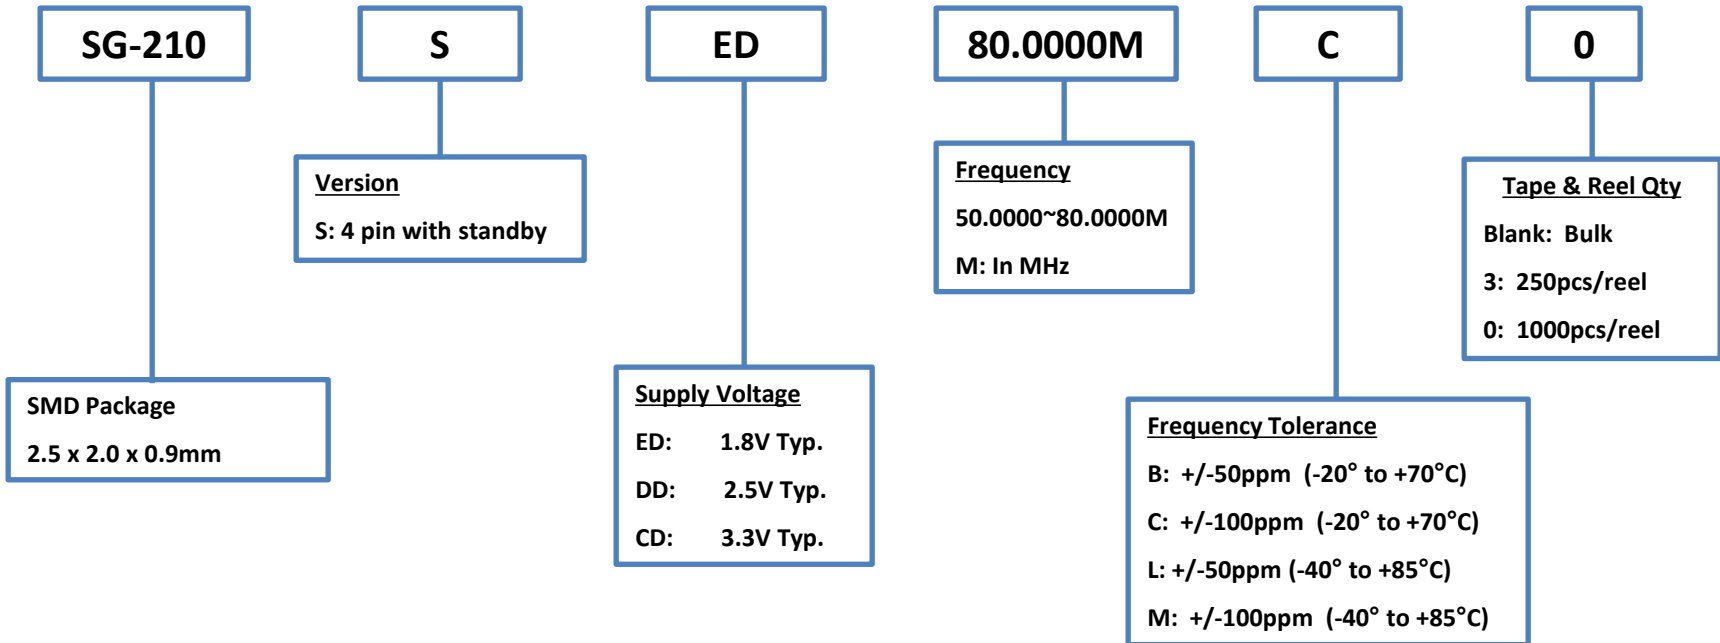


Product Configuration System



Crystal Oscillators - SPXO

Discontinued

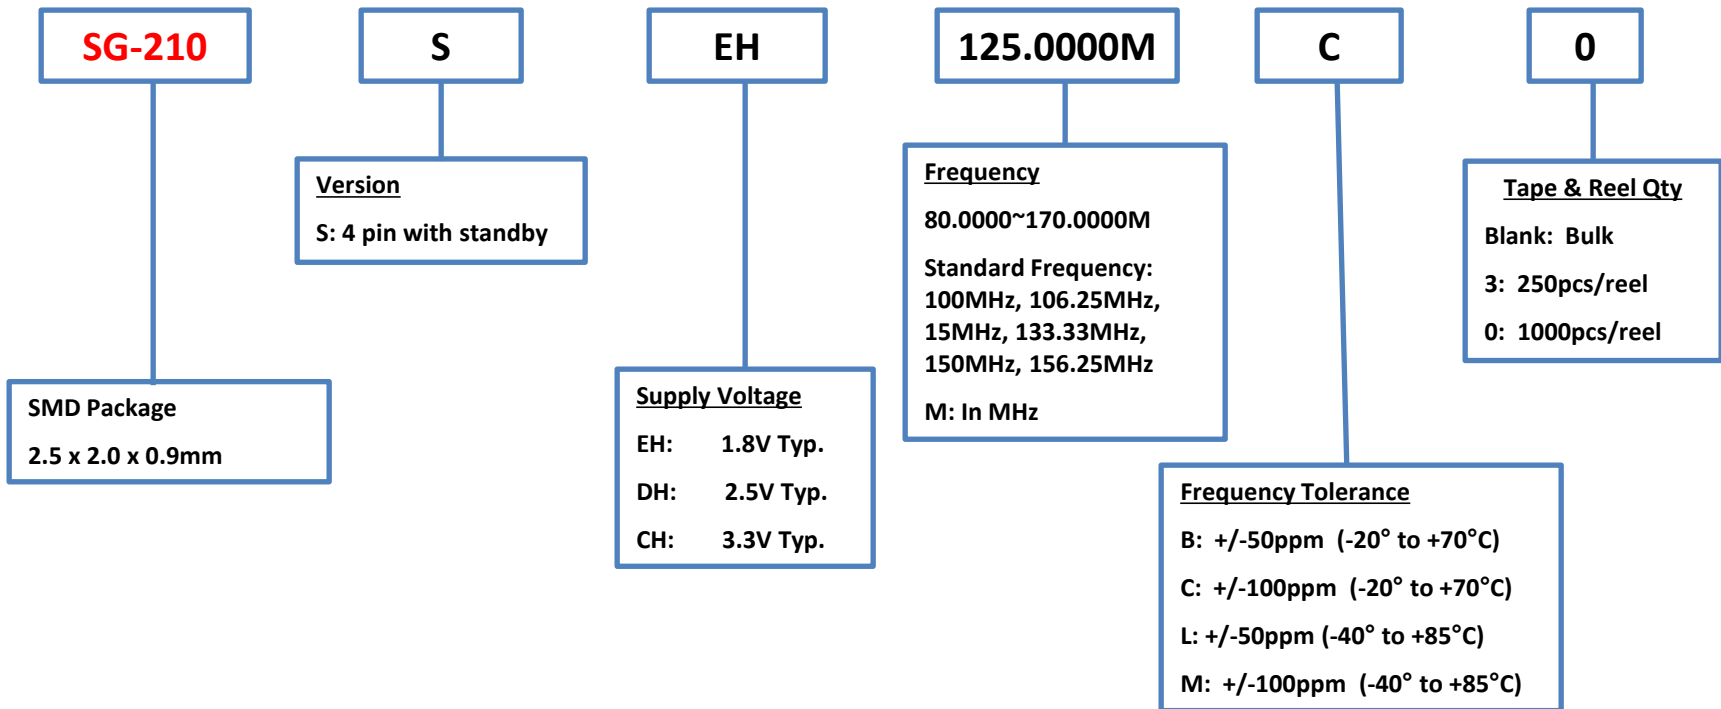


Product Configuration System



Crystal Oscillators - SPXO

Discontinued

**Consider
SG2520CAA (std freq)
Or SG-8101CGA**

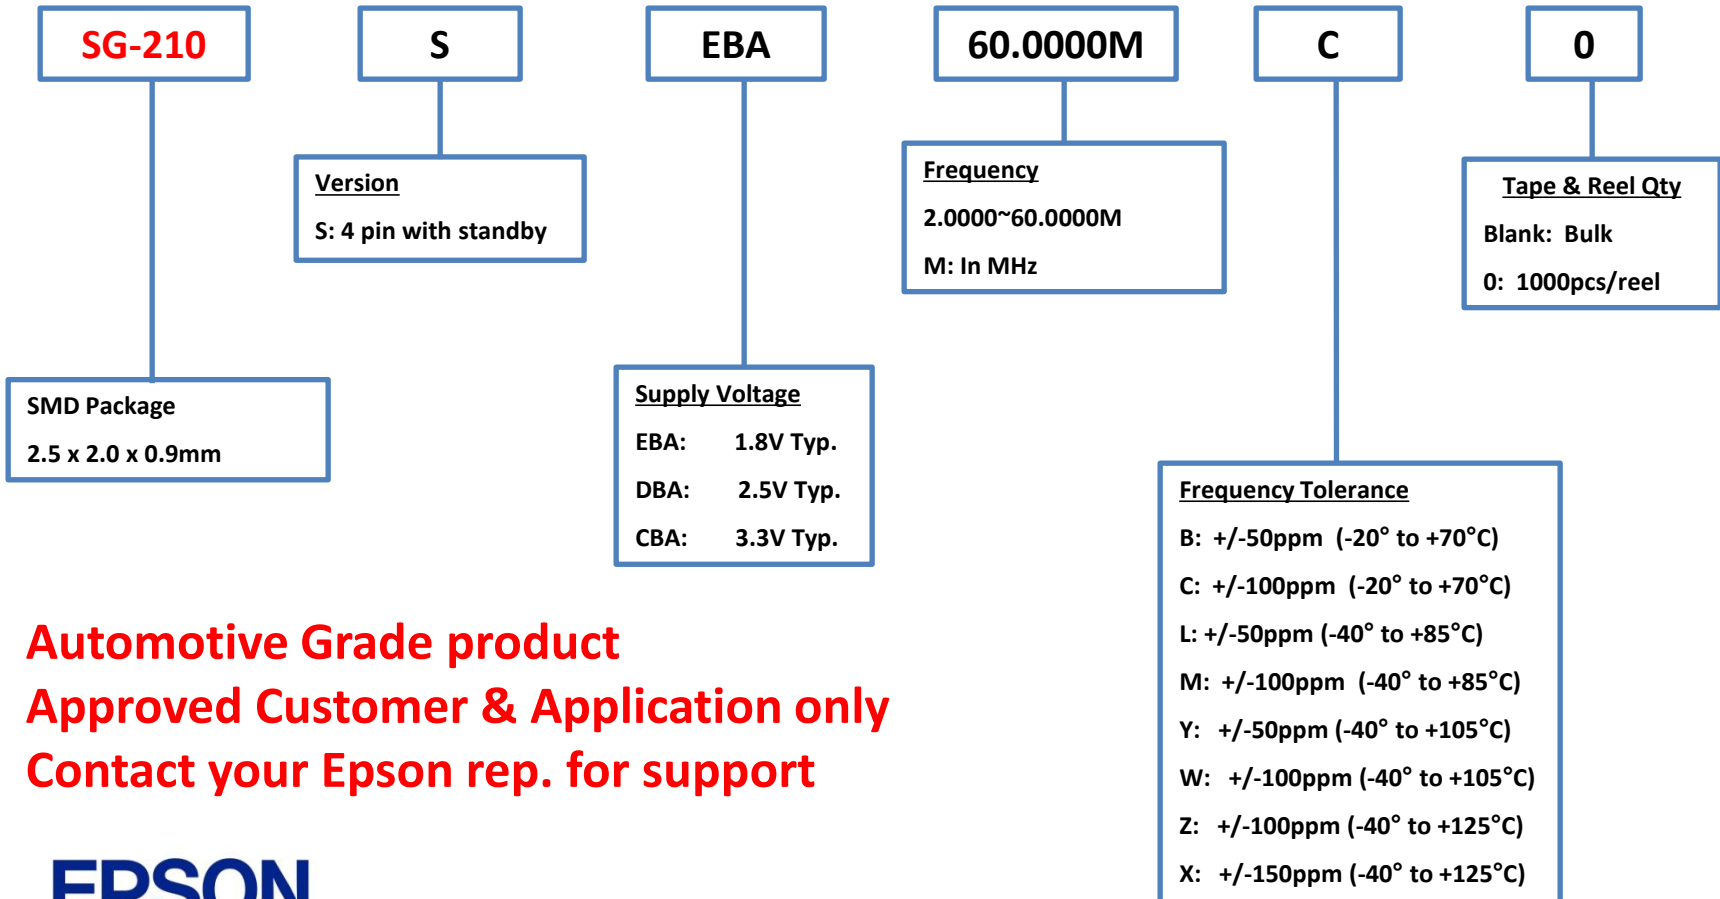

**Automotive Grade product
Approved Customer & Application only
Contact your Epson rep. for support**






Product Configuration System

Crystal Oscillators - SPXO

Discontinued

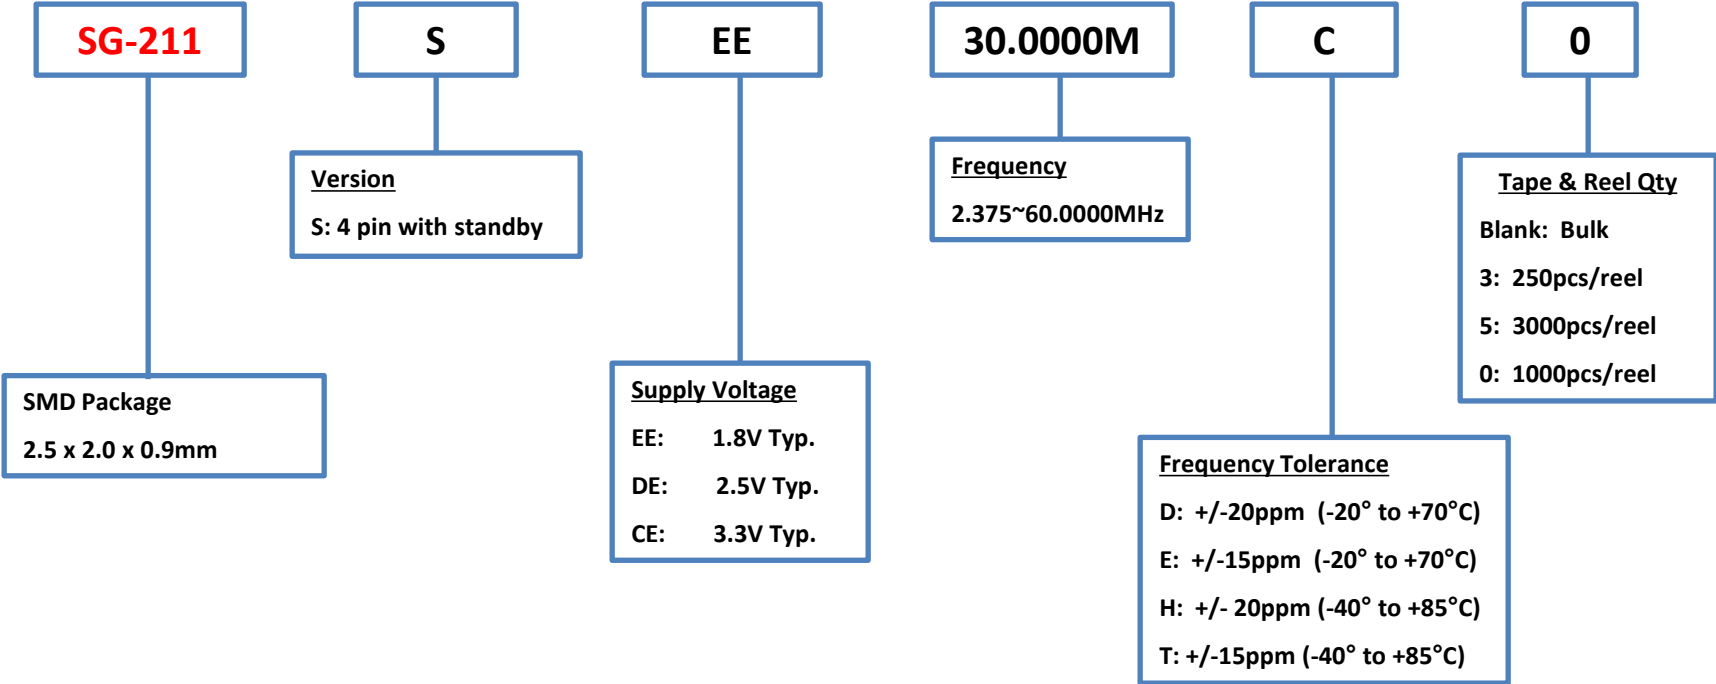


Product Configuration System



Crystal Oscillators - SPXO

Discontinued

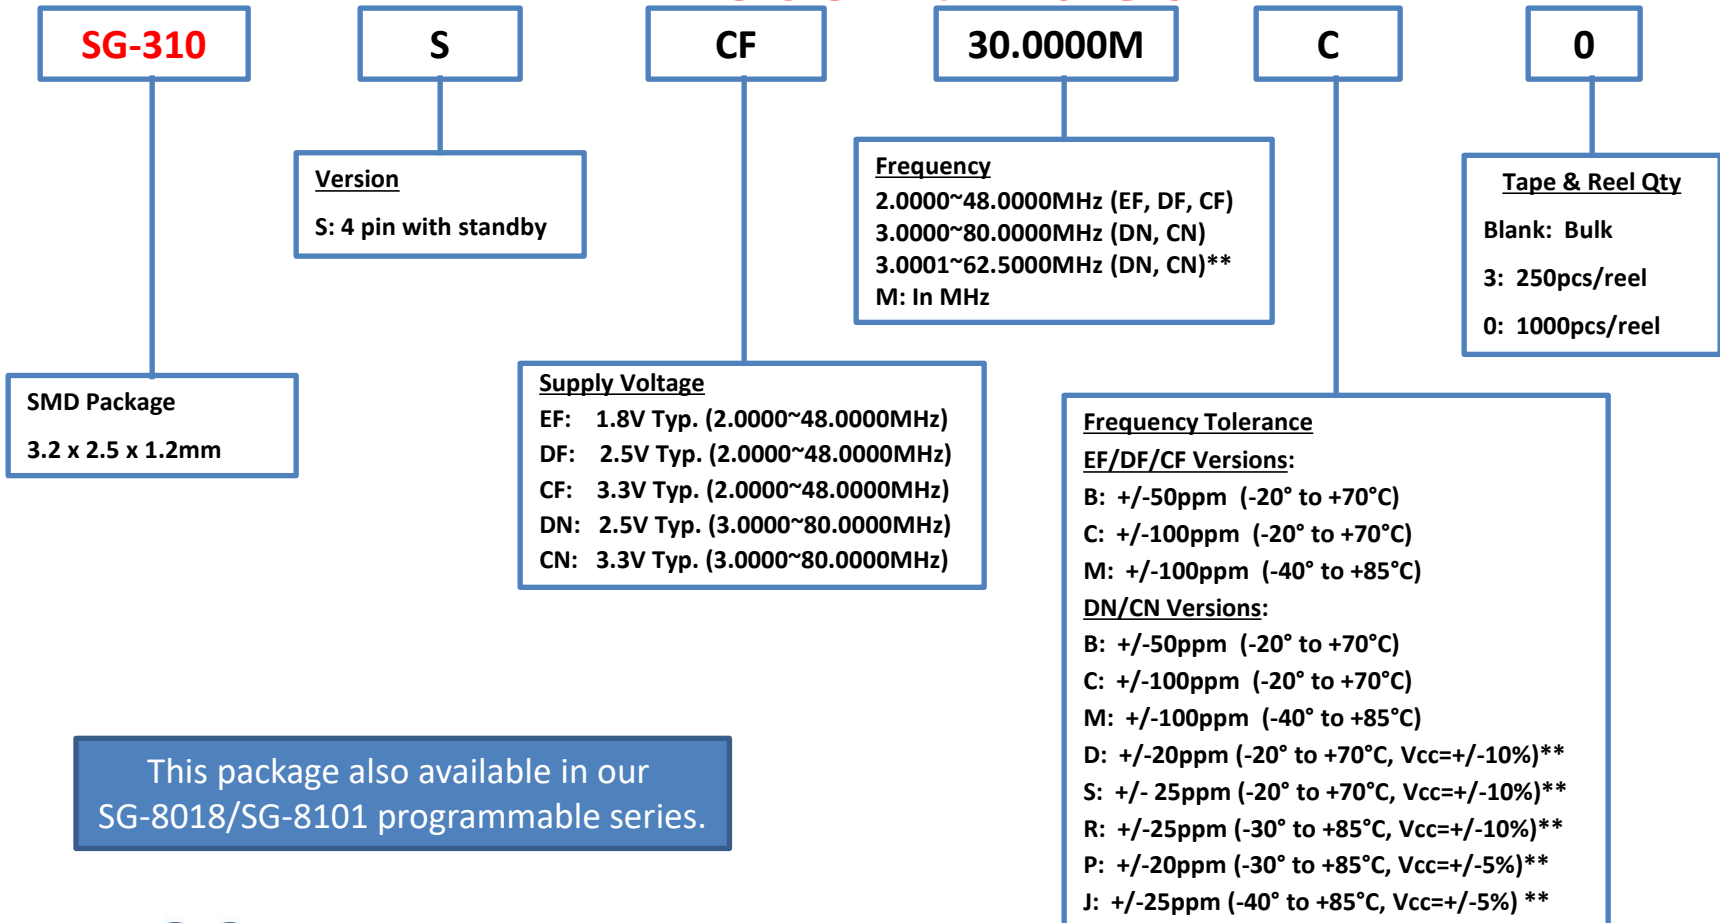


Product Configuration System



Crystal Oscillators - SPXO

Discontinued

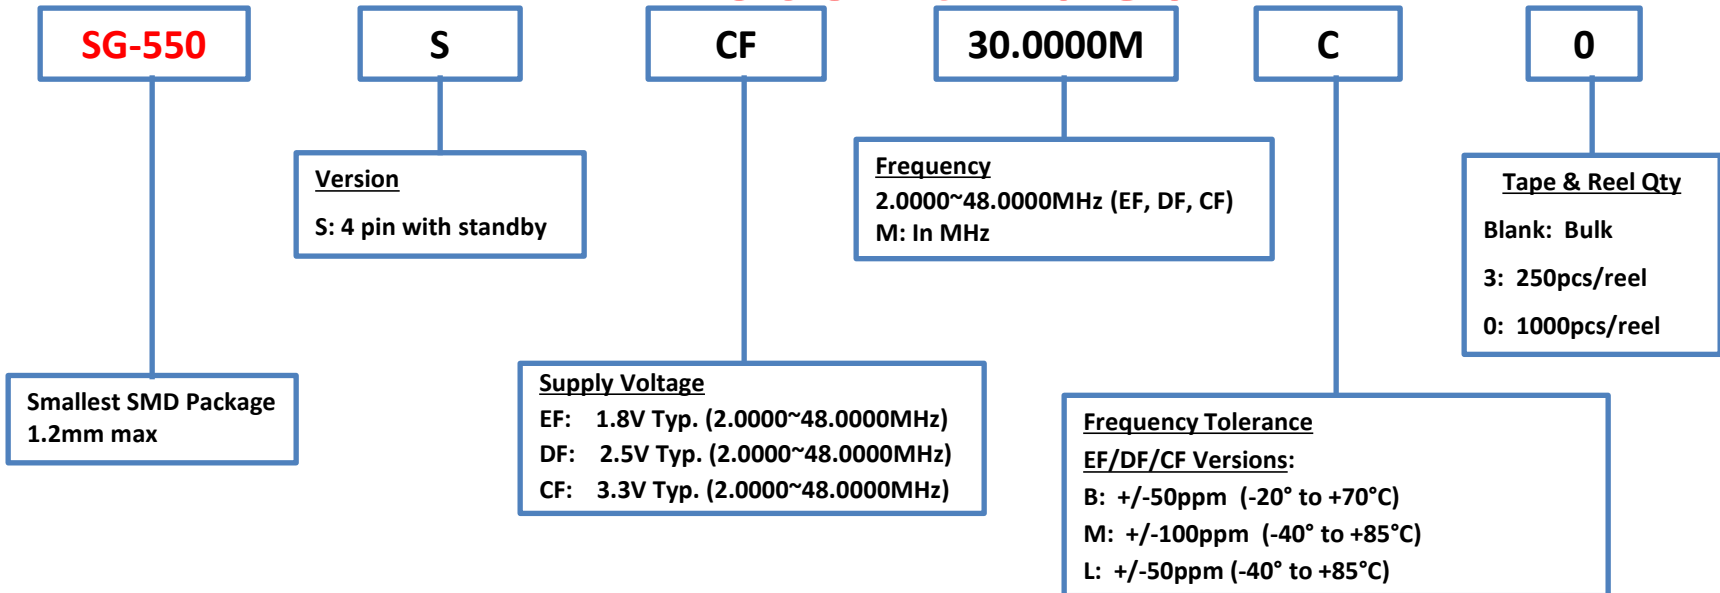

This package also available in our SG-8018/SG-8101 programmable series.




Product Configuration System



Crystal Oscillators - SPXO

Discontinued

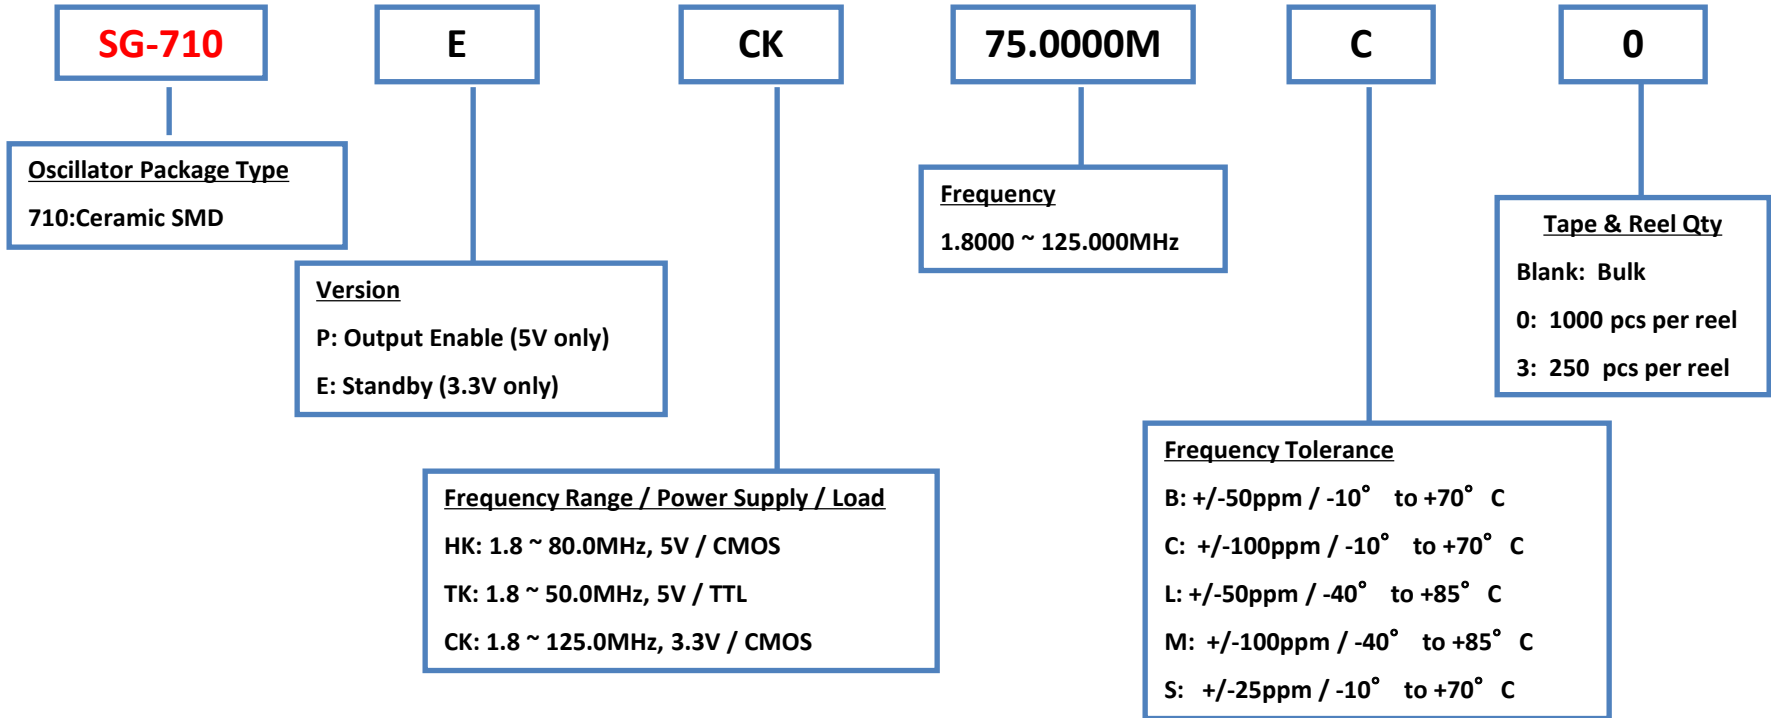

These packages also available in our SG-8018/SG-8101 programmable series.




Product Configuration System



Crystal Oscillators - SPXO

Discontinued

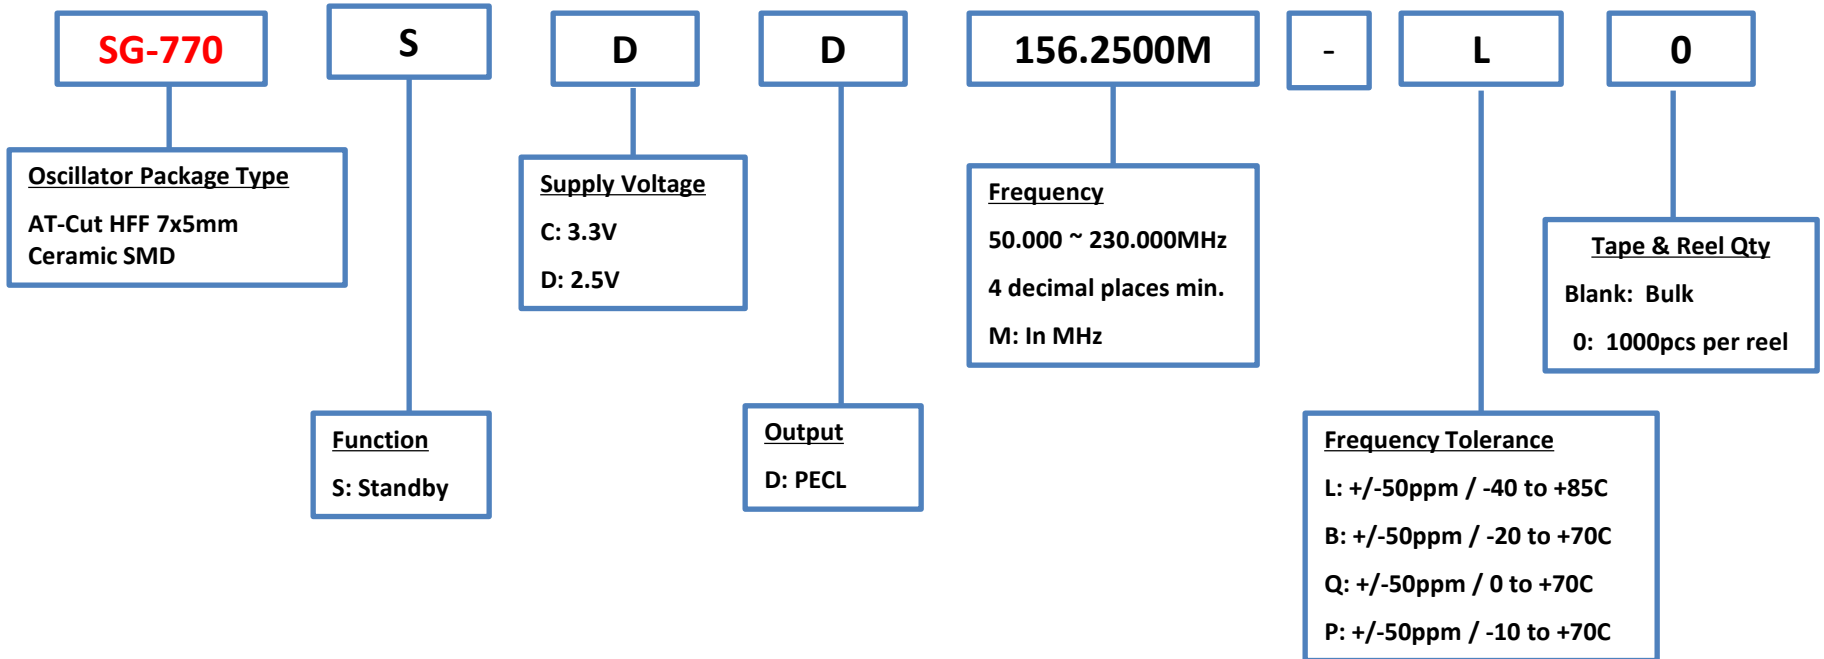


Replaces TCO-7116H1A



Product Configuration System



Crystal Oscillators – SPXO, Automotive (Conforms to AEC-Q200 Requirement)

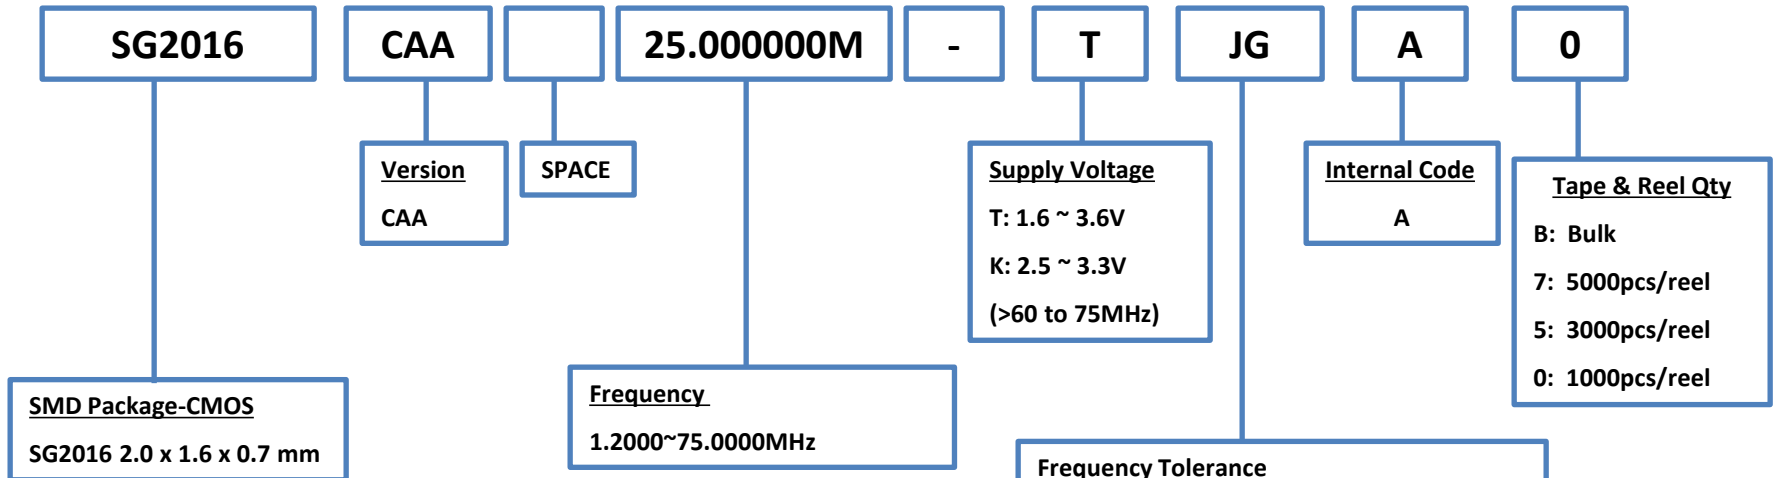

Automotive Grade product
Approved Customer & Application only
Contact your Epson rep. for support


EPSON

Example: SG2016CAA 25.0000M-TJGA7
Please contact us about available frequencies

Product Configuration System



Crystal Oscillators - SPXO

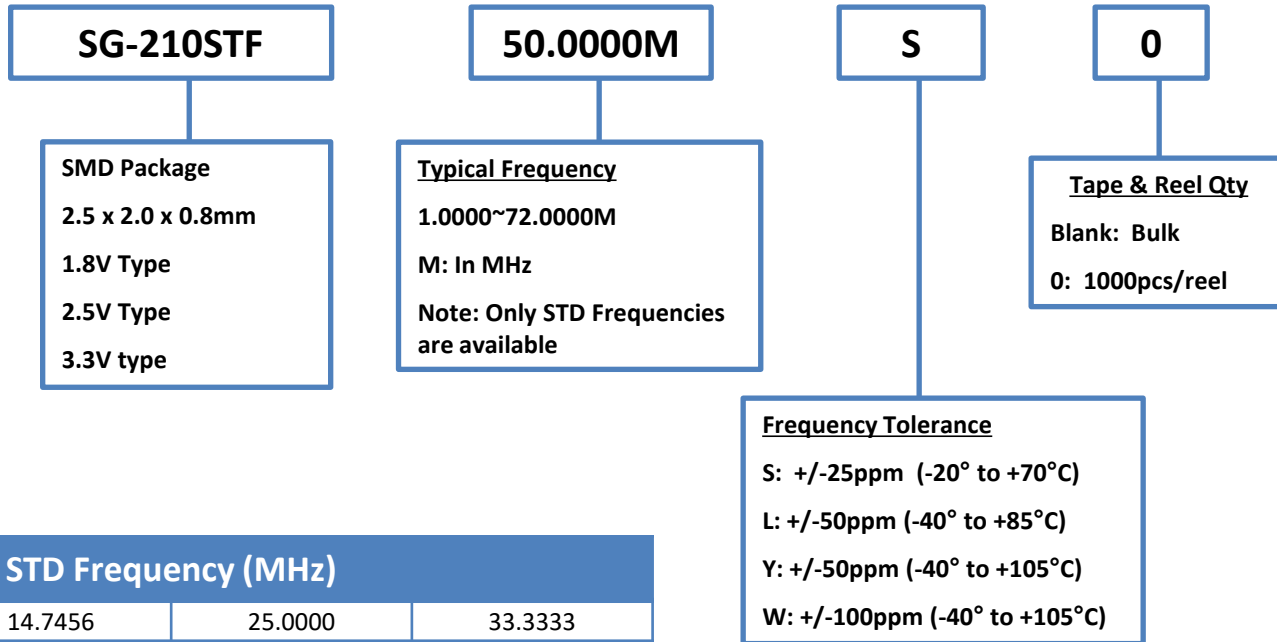

STD Frequency (MHz)			
4.0000	14.7456	25.0000	33.3333
8.0000	16.0000	26.0000	40.0000
10.0000	20.0000	27.0000	48.0000
12.0000	24.0000	32.0000	50.0000
12.2880	24.5760	33.3300	72.0000




For non-standard frequencies, please see SG-8018CG



Product Configuration System

Crystal Oscillators - SPXO

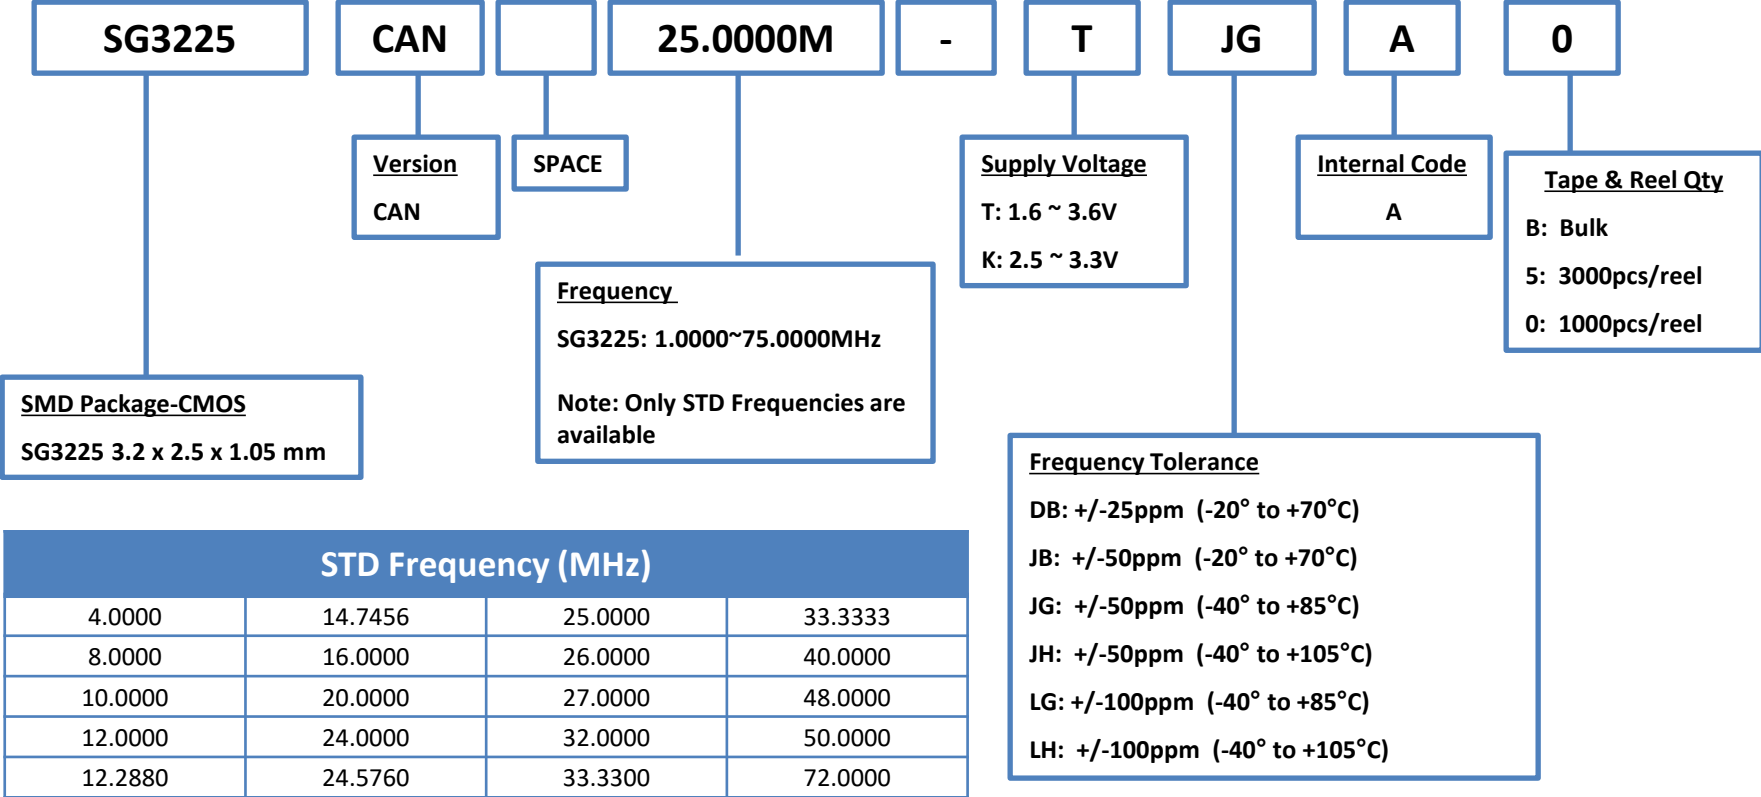


Example: SG3225CAN 25.0000M-TJGA

For non-standard frequencies, please see SG-8018CE



Product Configuration System

Crystal Oscillators - SPXO

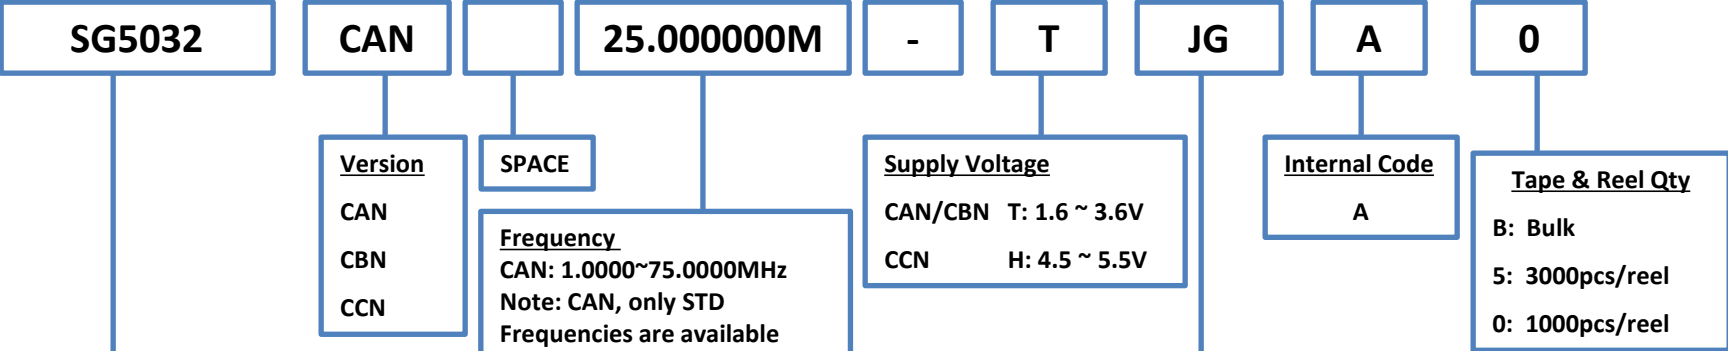

SMD Package-CMOS
 SG5032 5 x 3.2 x 1.1 mm
 SG7050 7 x 5 x 1.3 mm

Frequency
 CAN: 1.0000~75.0000MHz
 Note: CAN, only STD Frequencies are available
 CBN: 80.0000~170.0000Mhz
 Note: CBN is discontinued
 CCN: 2.5000~50.0000Mhz

Supply Voltage
 CAN/CBN T: 1.6 ~ 3.6V
 CCN H: 4.5 ~ 5.5V

Internal Code
 A

Tape & Reel Qty
 B: Bulk
 5: 3000pcs/reel
 0: 1000pcs/reel

Frequency Tolerance
 JG: +/-50ppm (-40° to +85°C)
 LG: +/-100ppm (-40° to +85°C)
 LH: +/-100ppm (-40° to +105°C) CAN ONLY

STD Frequency (MHz)			
4.0000	14.7456	25.0000	33.3333
8.0000	16.0000	26.0000	40.0000
10.0000	20.0000	27.0000	48.0000
12.0000	24.0000	32.0000	50.0000
12.2880	24.5760	33.3300	72.0000

Example: SG5032CAN 25.0000M-TJGA
 JH is not available




For non-standard frequencies, please see SG-8018

Product Configuration System



Crystal Oscillators - SPXO

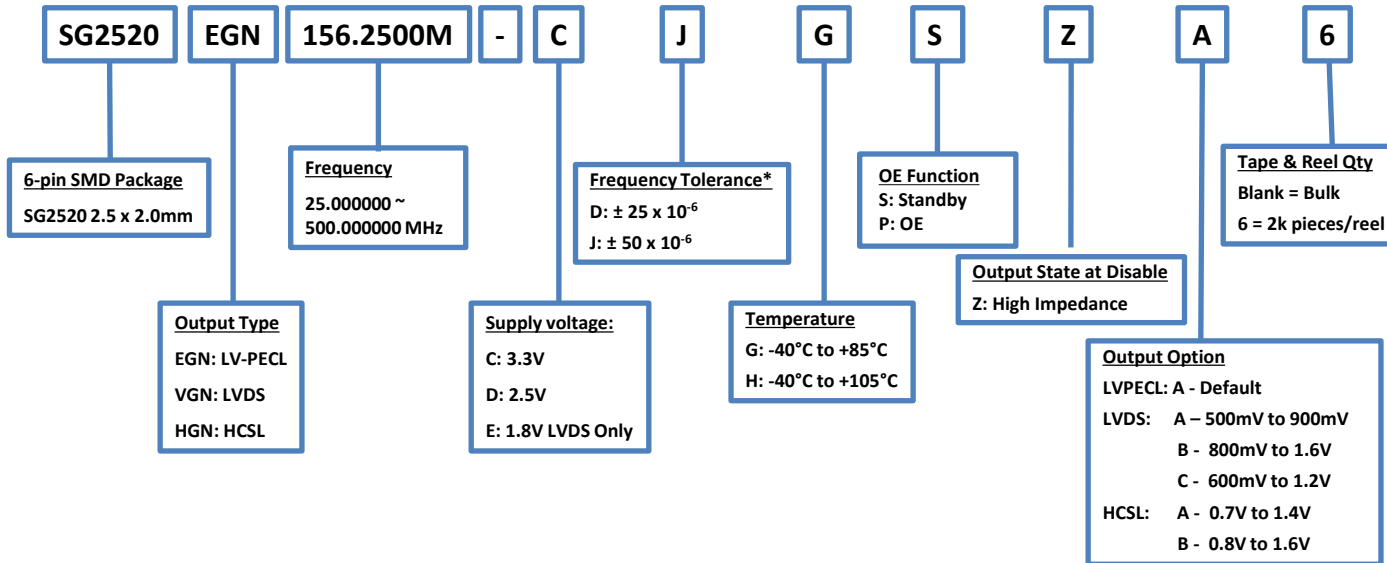

* Please contact SEC for availability for a given temperature range




Note: All packages are RoHS Compliant

Product Configuration System



Crystal Oscillators - SPXO

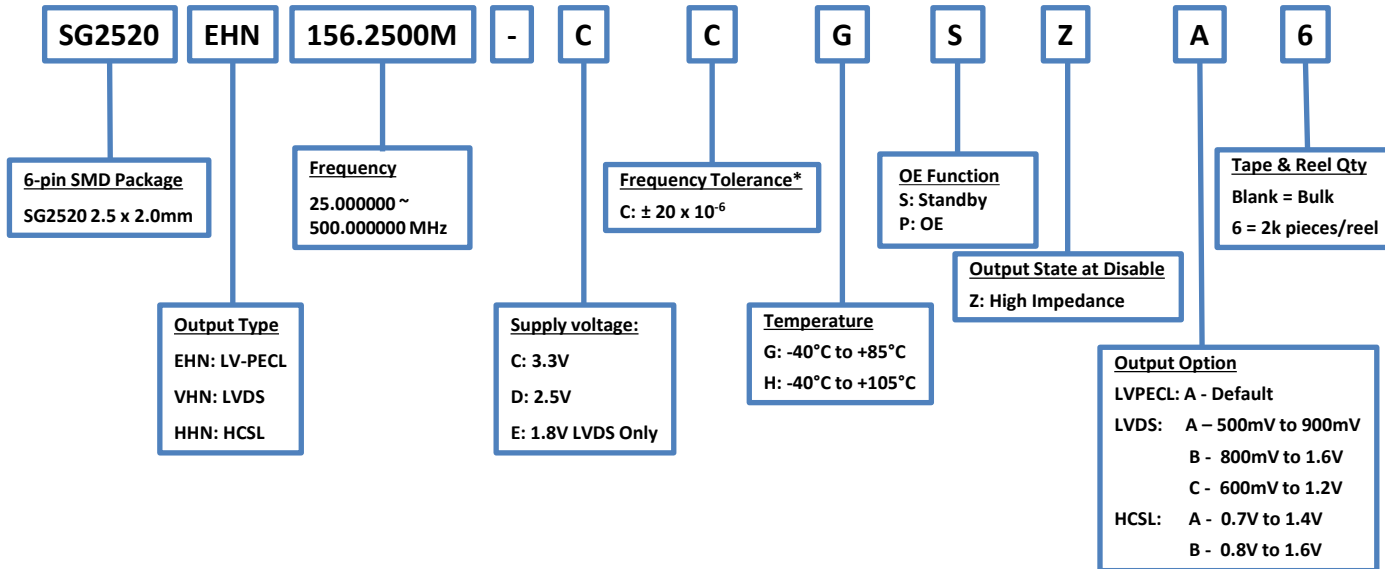

* Please contact SEC for availability for a given temperature range




Note: All packages are RoHS Compliant

Product Configuration System



Crystal Oscillators - SPXO

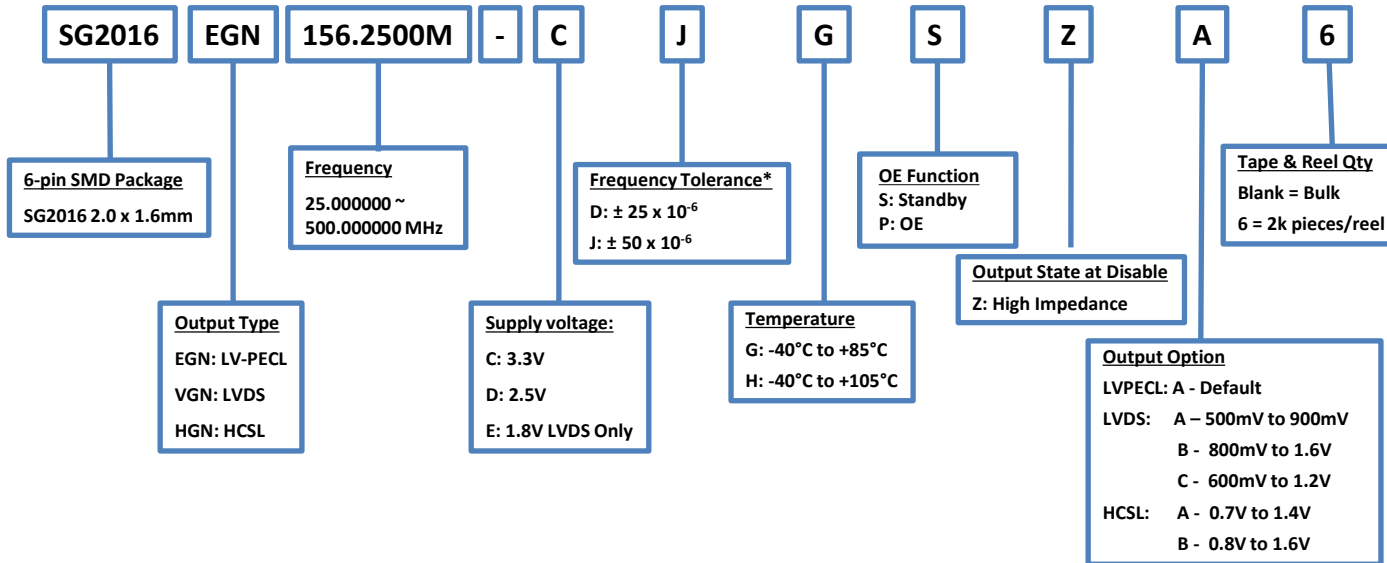

* Please contact SEC for availability for a given temperature range




Note: All packages are RoHS Compliant

Product Configuration System



Crystal Oscillators - SPXO

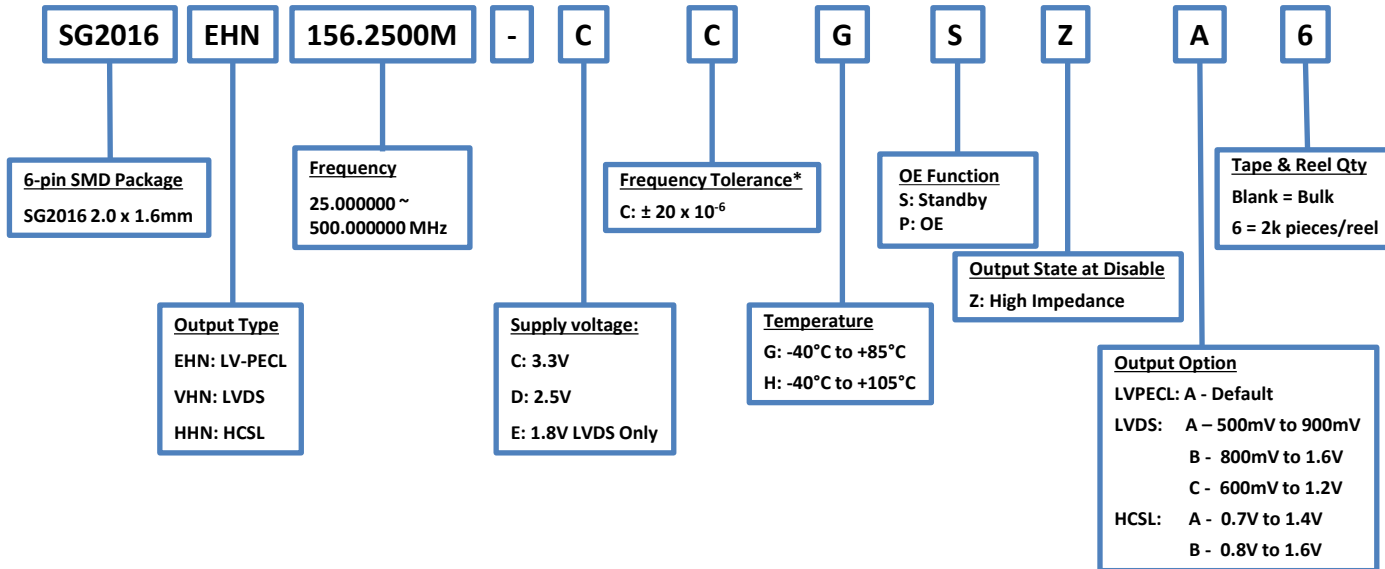

* Please contact SEC for availability for a given temperature range


EPSON

Note: All packages are RoHS Compliant

Product Configuration System



Crystal Oscillators – SPXO, Automotive (Conforms to AEC-Q200 Requirement)

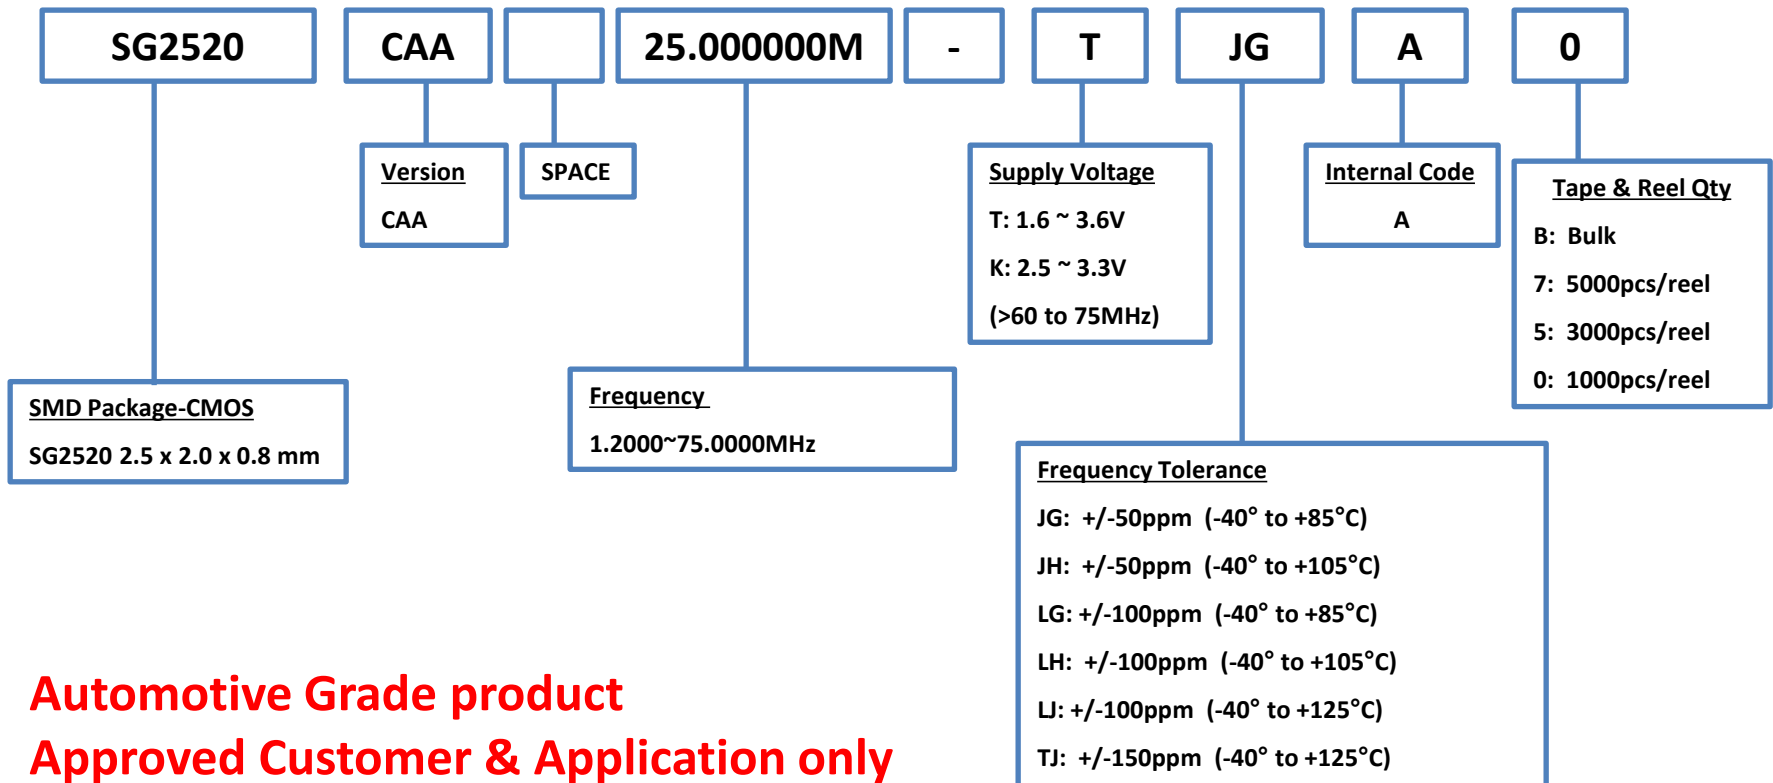


Automotive Grade product
Approved Customer & Application only
Contact your Epson rep. for support

EPSON

Product Configuration System



Crystal Oscillators - SPXO

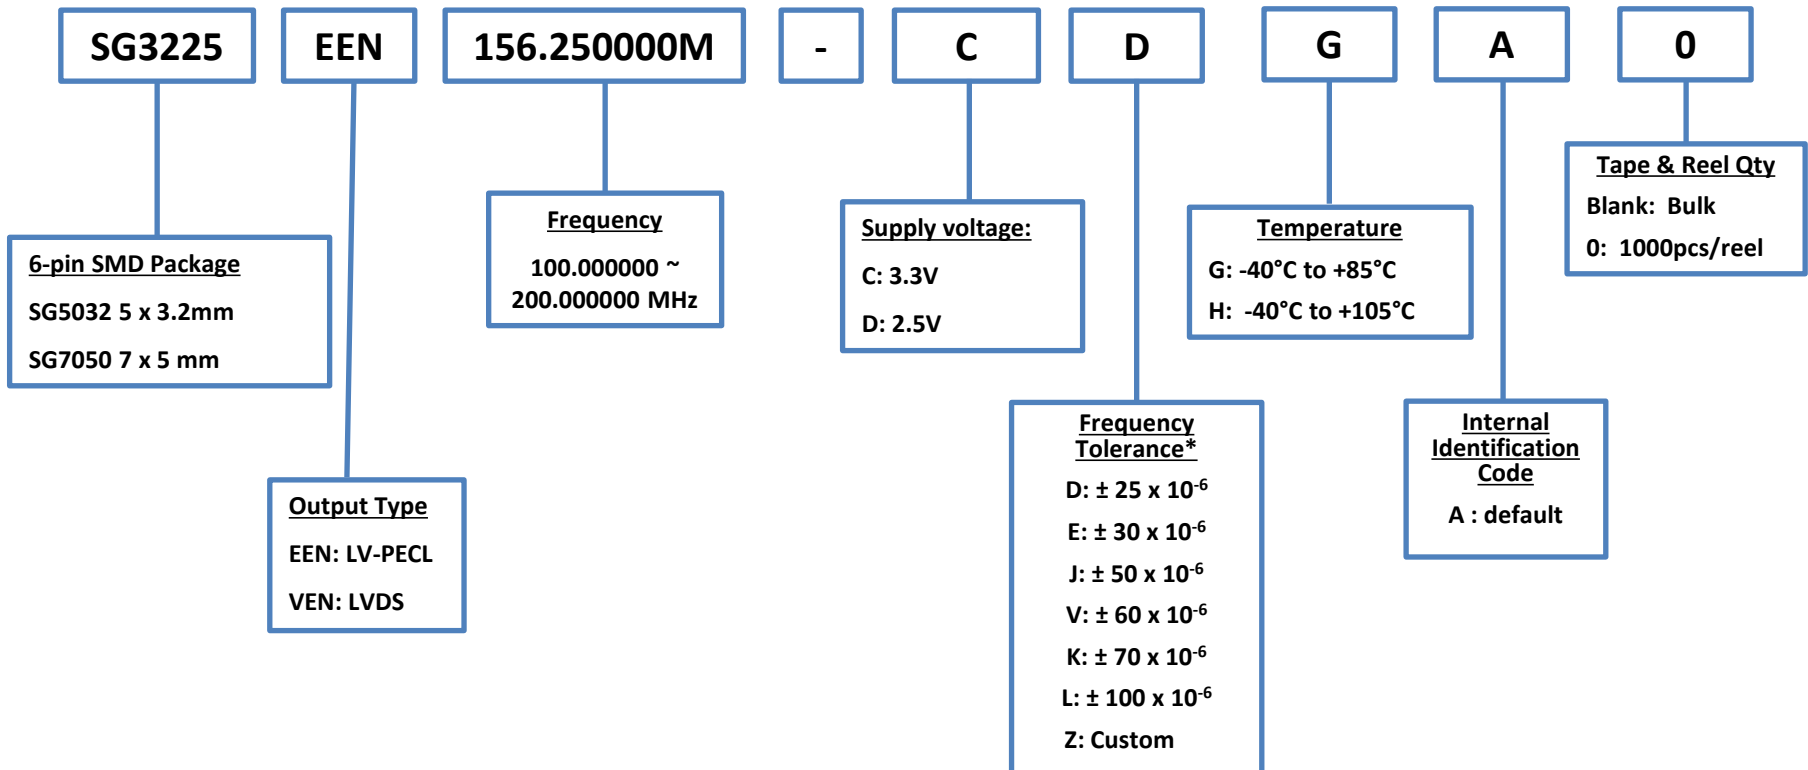

* Please contact SEC for availability for a given temperature range




Note: All packages are RoHS Compliant

Product Configuration System



Crystal Oscillators - SPXO

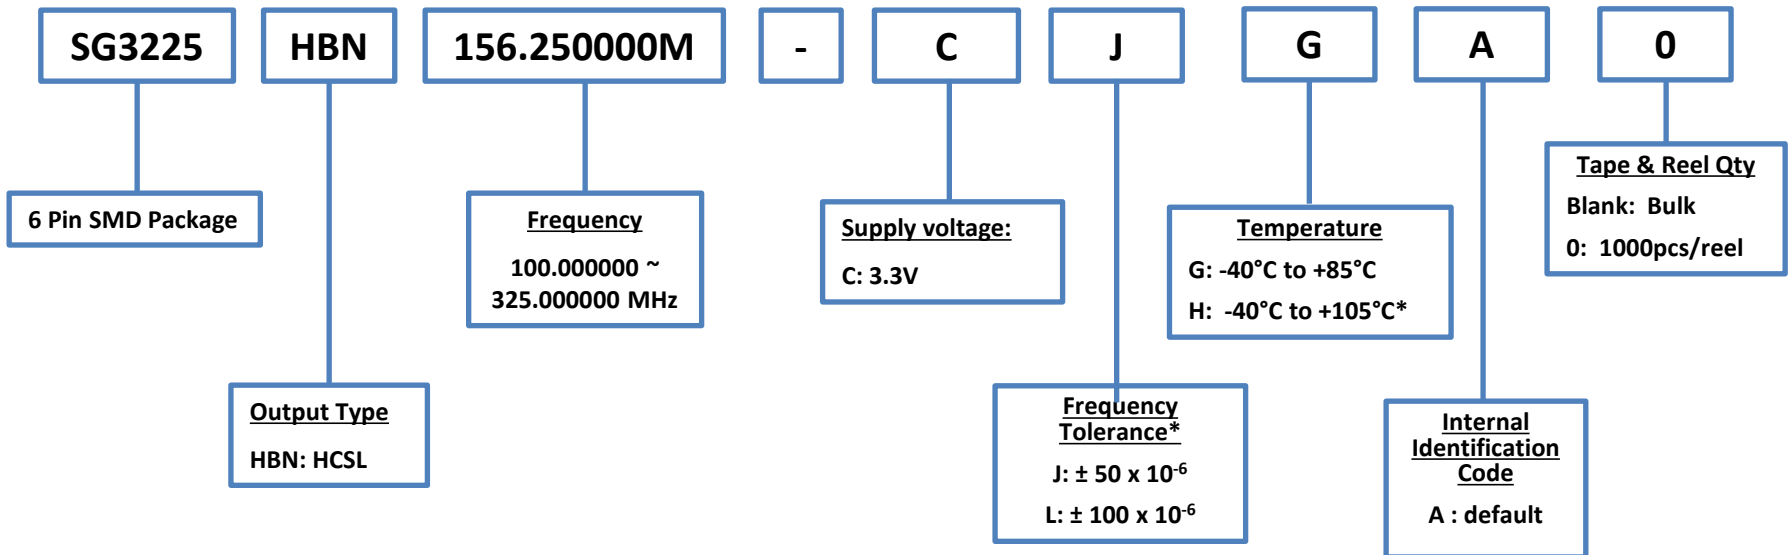

* Please contact SEC for availability for a given temperature range




Note: All packages are RoHS Compliant
*For 105C, contact Epson

Product Configuration System



Crystal Oscillators - SPXO

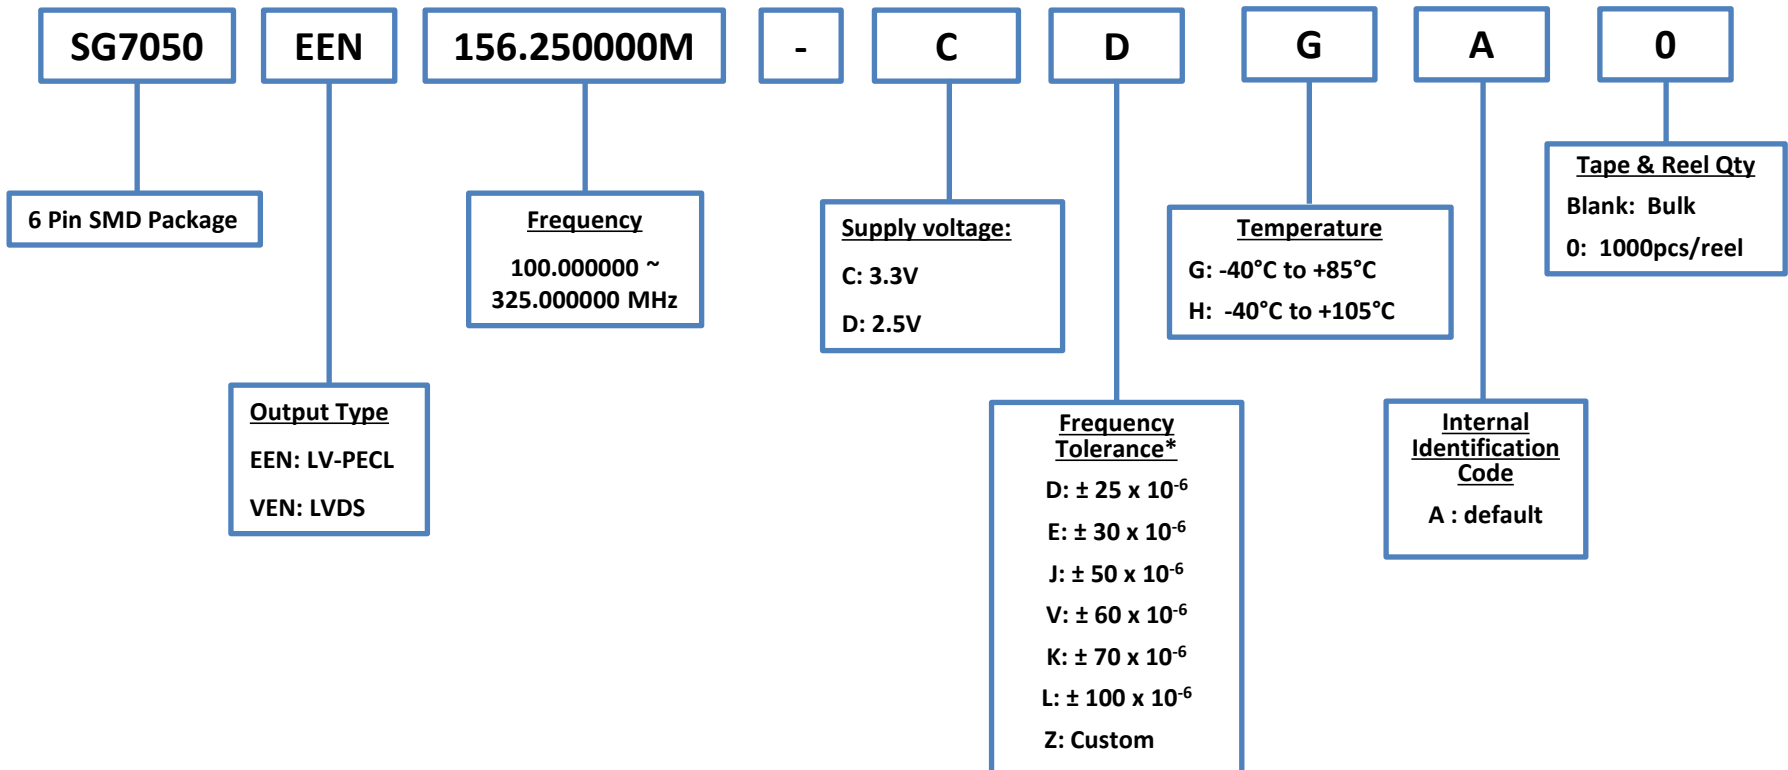

* Please contact SEC for availability for a given temperature range




Note: All packages are RoHS Compliant



Product Configuration System

Crystal Oscillators – SPXO

Output : LV-PECL, LVDS

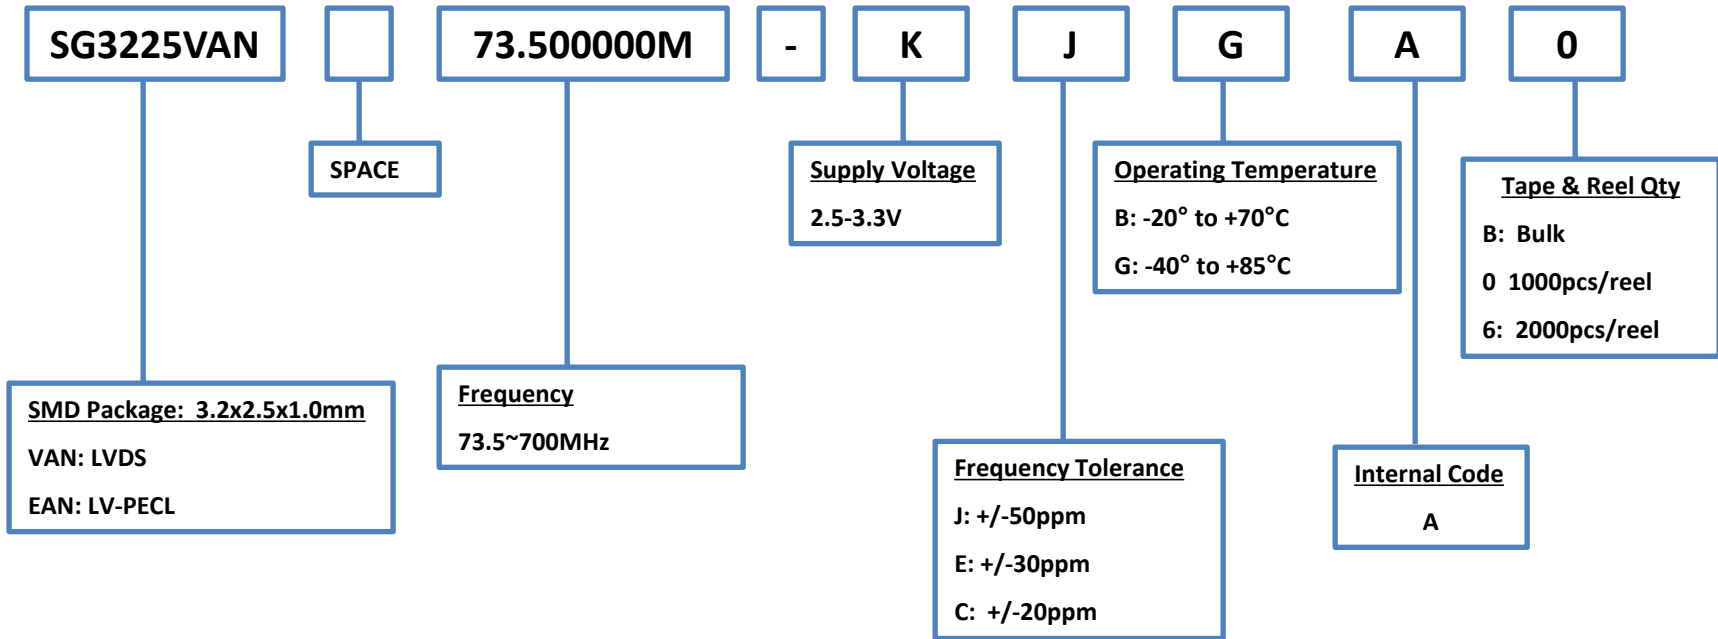


Example: SG3225EAN 73.500000M-KJGA
CG is not available



Product Configuration System

Crystal Oscillators – SPXO

Output : LV-PECL, LVDS

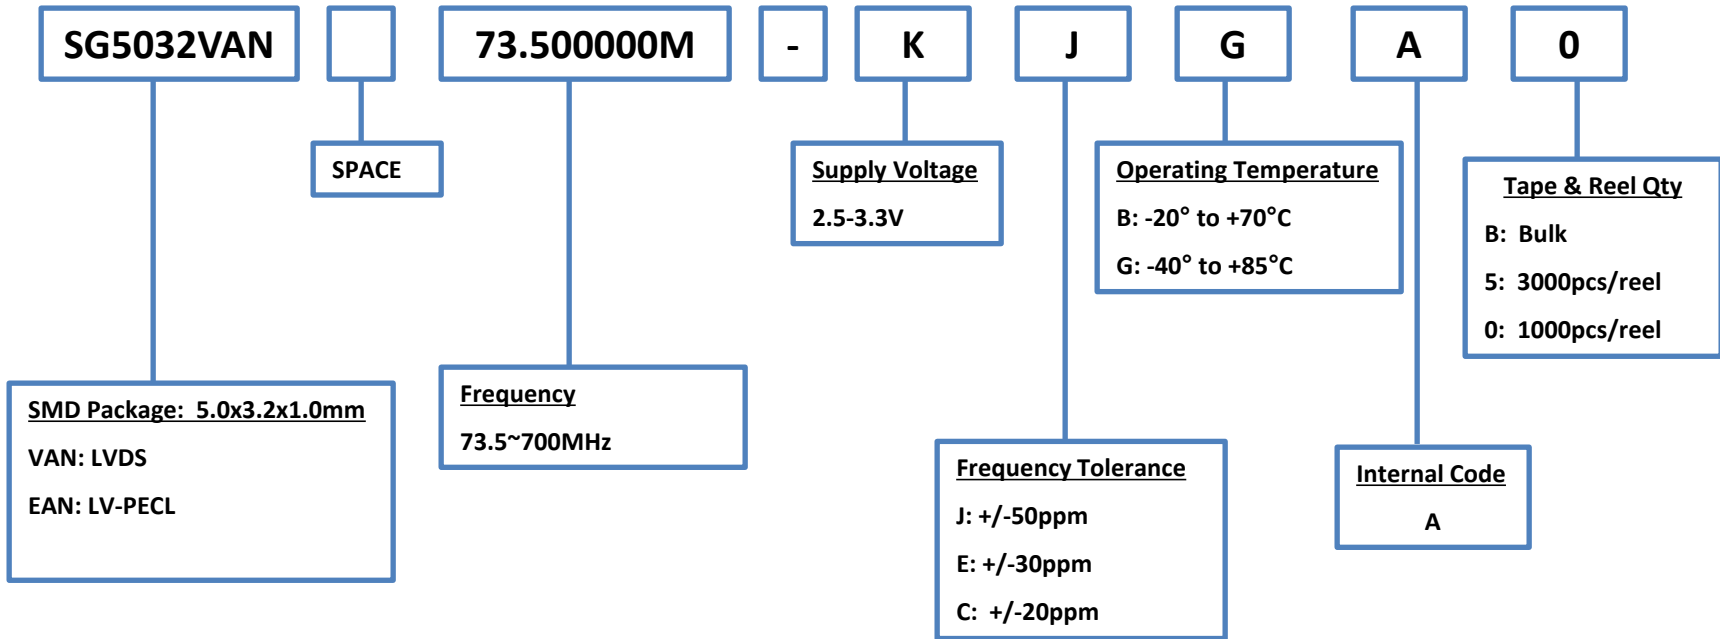


Example: SG5032EAN 73.500000M-KJGA
CG is not available



Product Configuration System

Crystal Oscillators – SPXO

Output : LV-PECL, LVDS

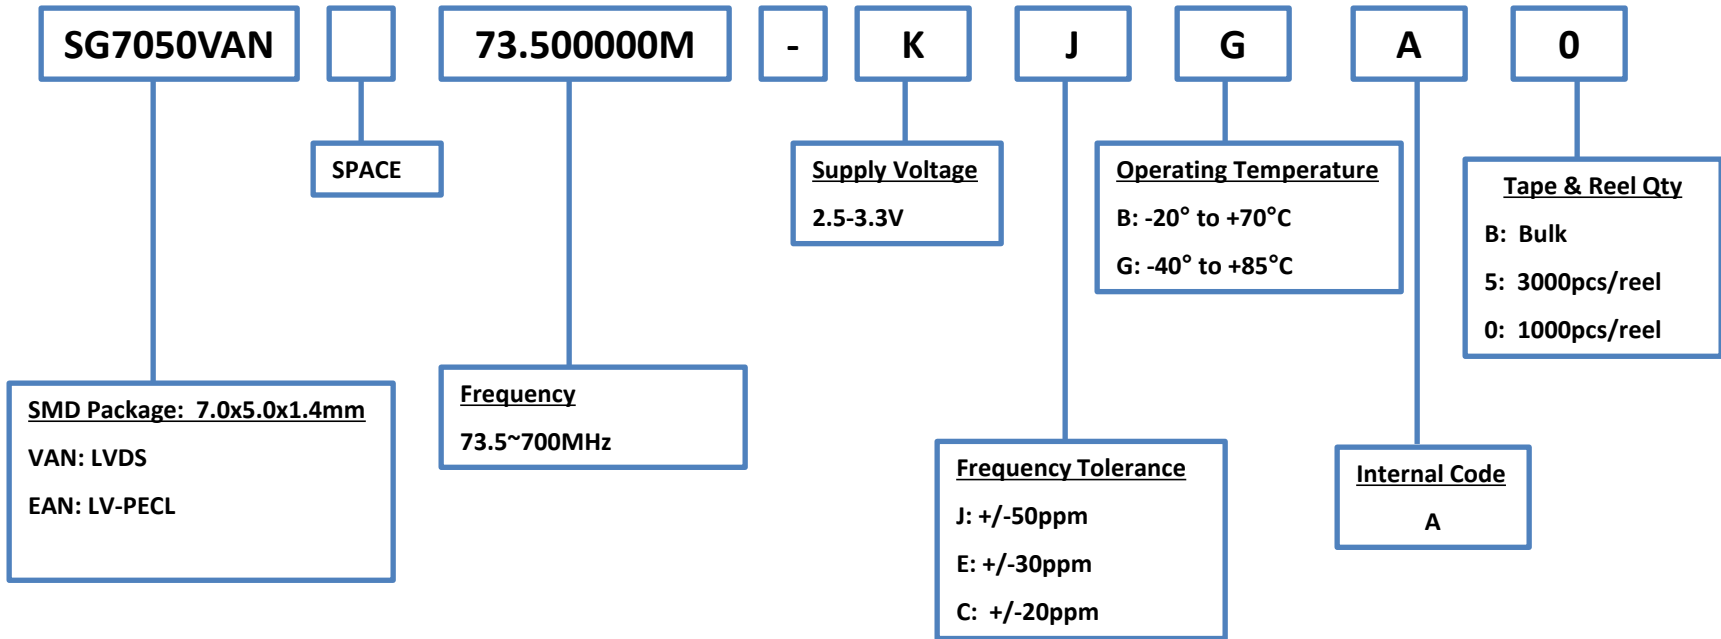

August 2024


Example: SG7050EAN 73.500000M-KJGA
CG is not available

Product Configuration System



Crystal Oscillator - SPXO

Discontinued

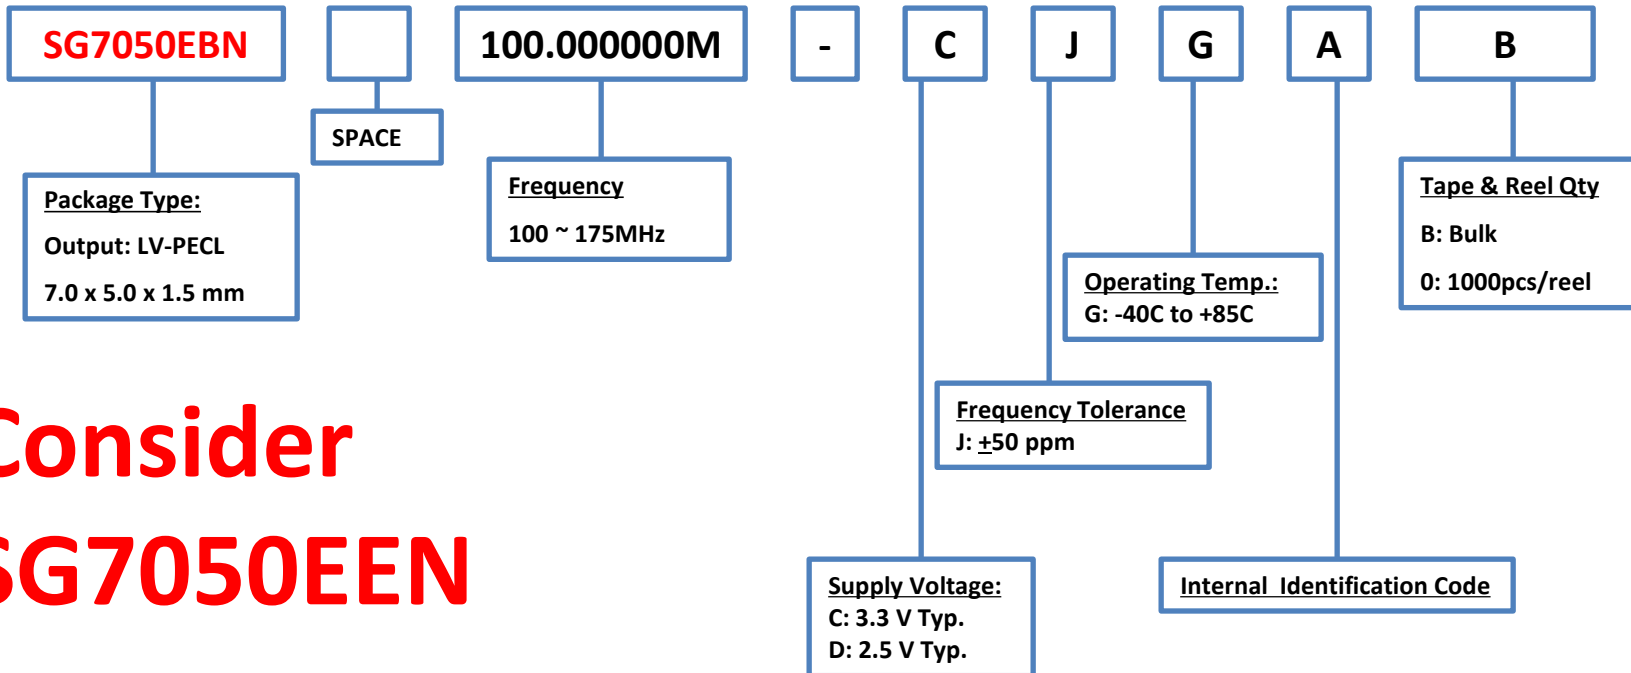

Consider SG7050EEN

NOTE:

Please contact us for requirements not listed in this specification.

EPSON


August 2024

Product Configuration System



Crystal Oscillators - SPXO

Discontinued

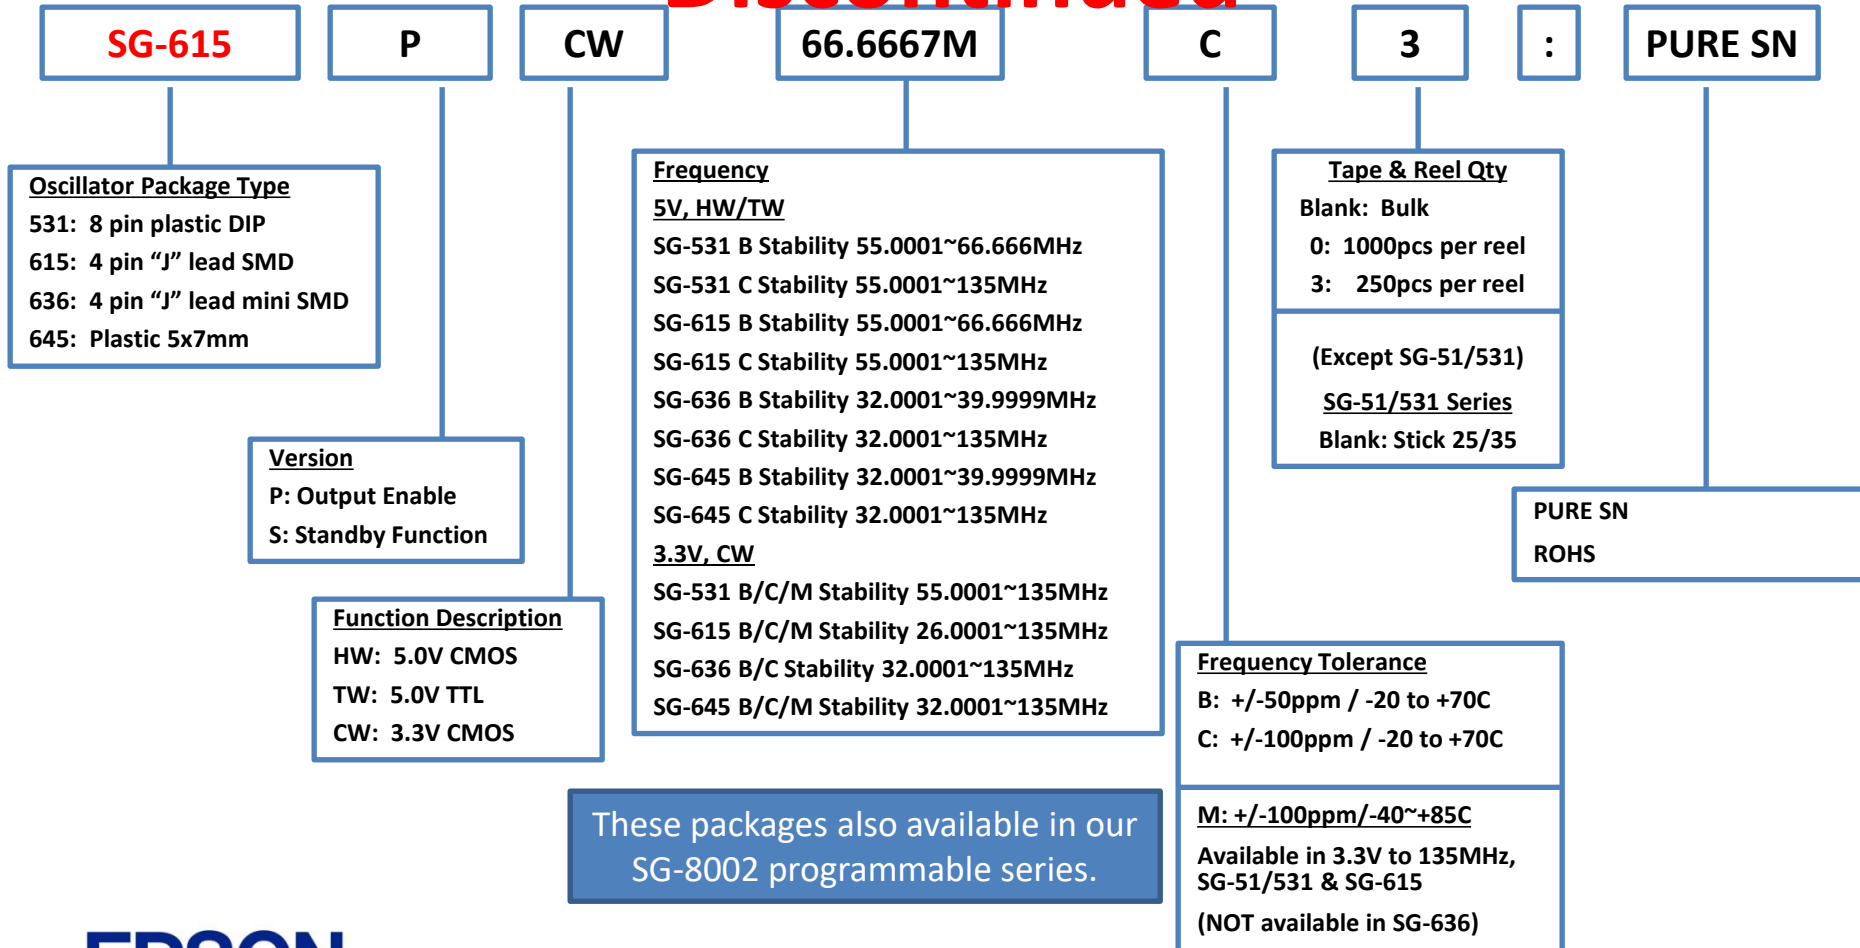


Product Configuration System



Crystal Oscillators - SPXO

Discontinued

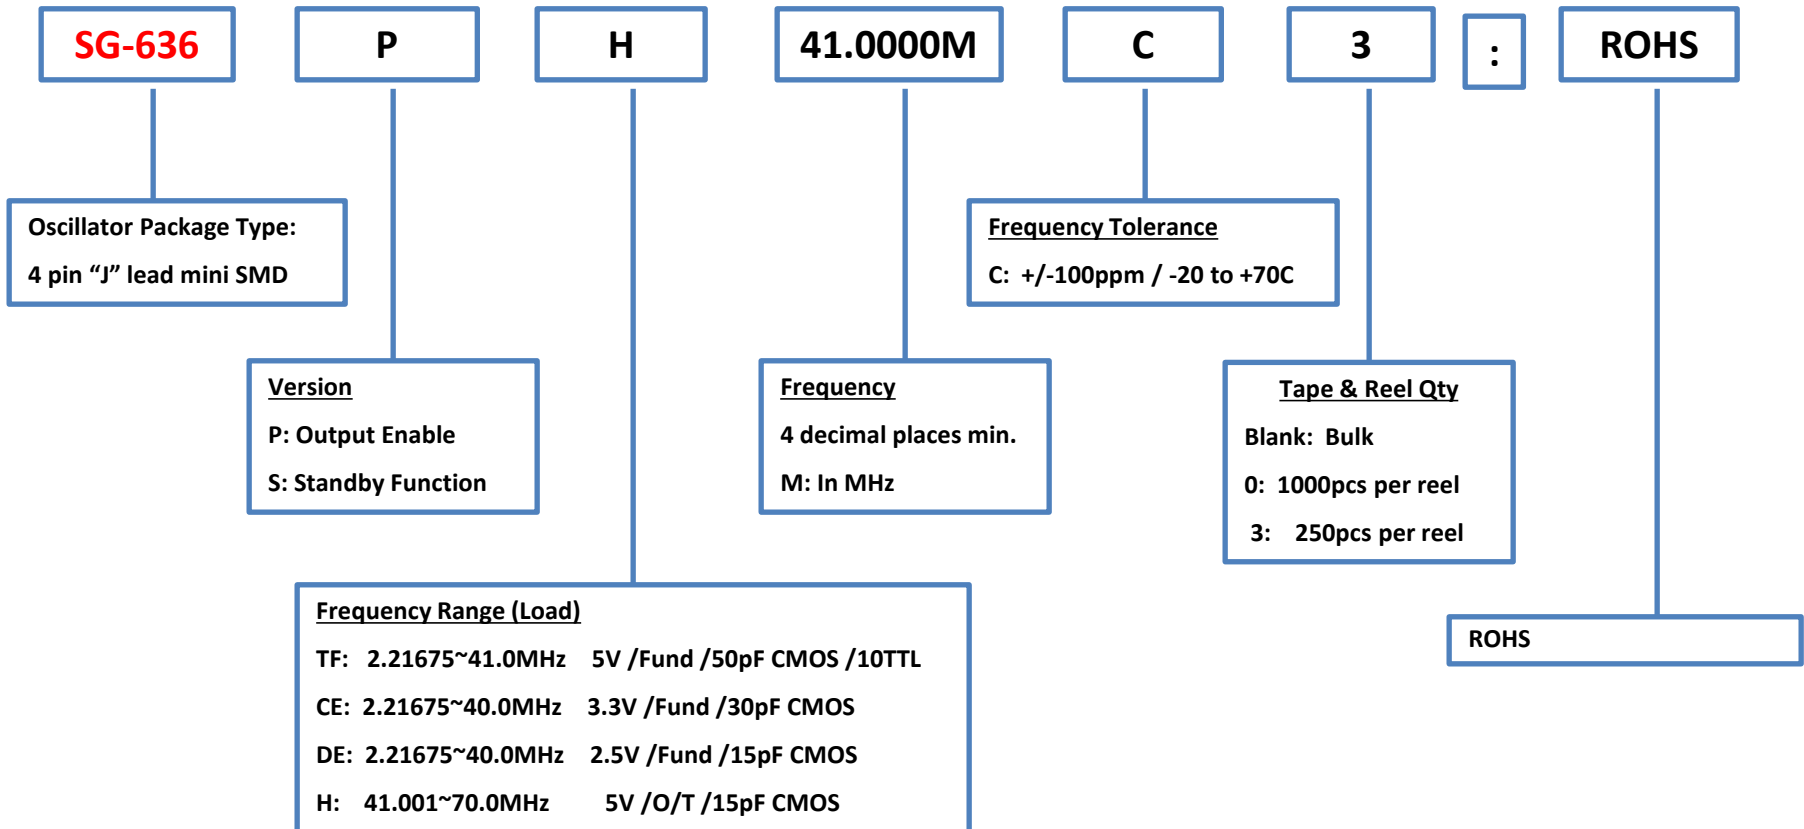


These packages also available in our SG-8002 programmable series.

Product Configuration System



Crystal Oscillators - SPXO

Discontinued

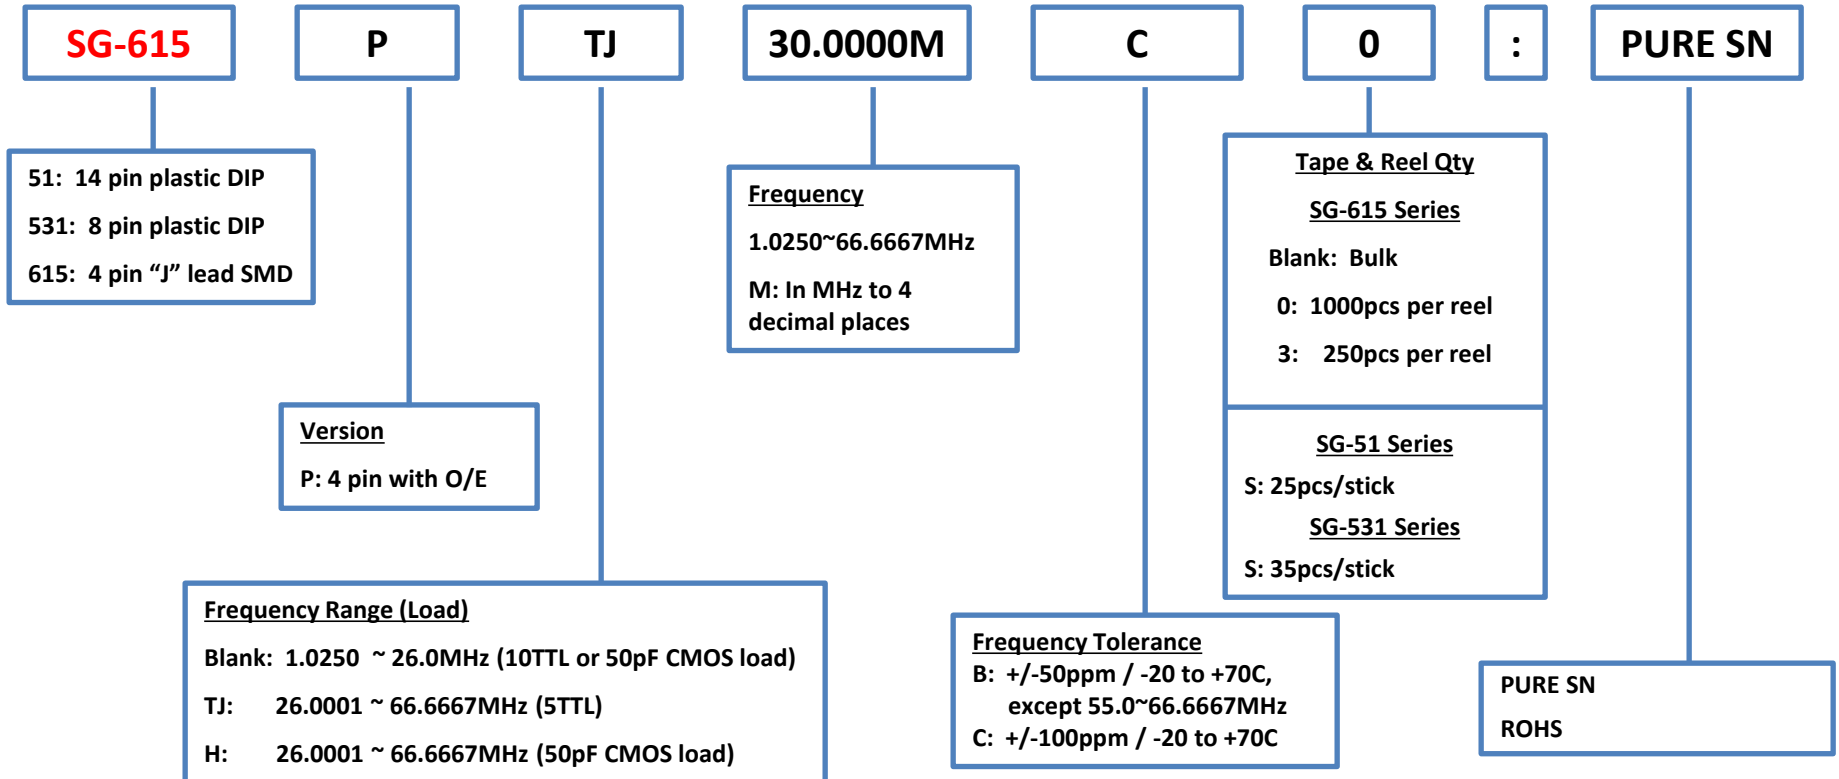

These packages also available in our SG-8002 programmable series.




Product Configuration System



Crystal Oscillators - SPXO

Discontinued

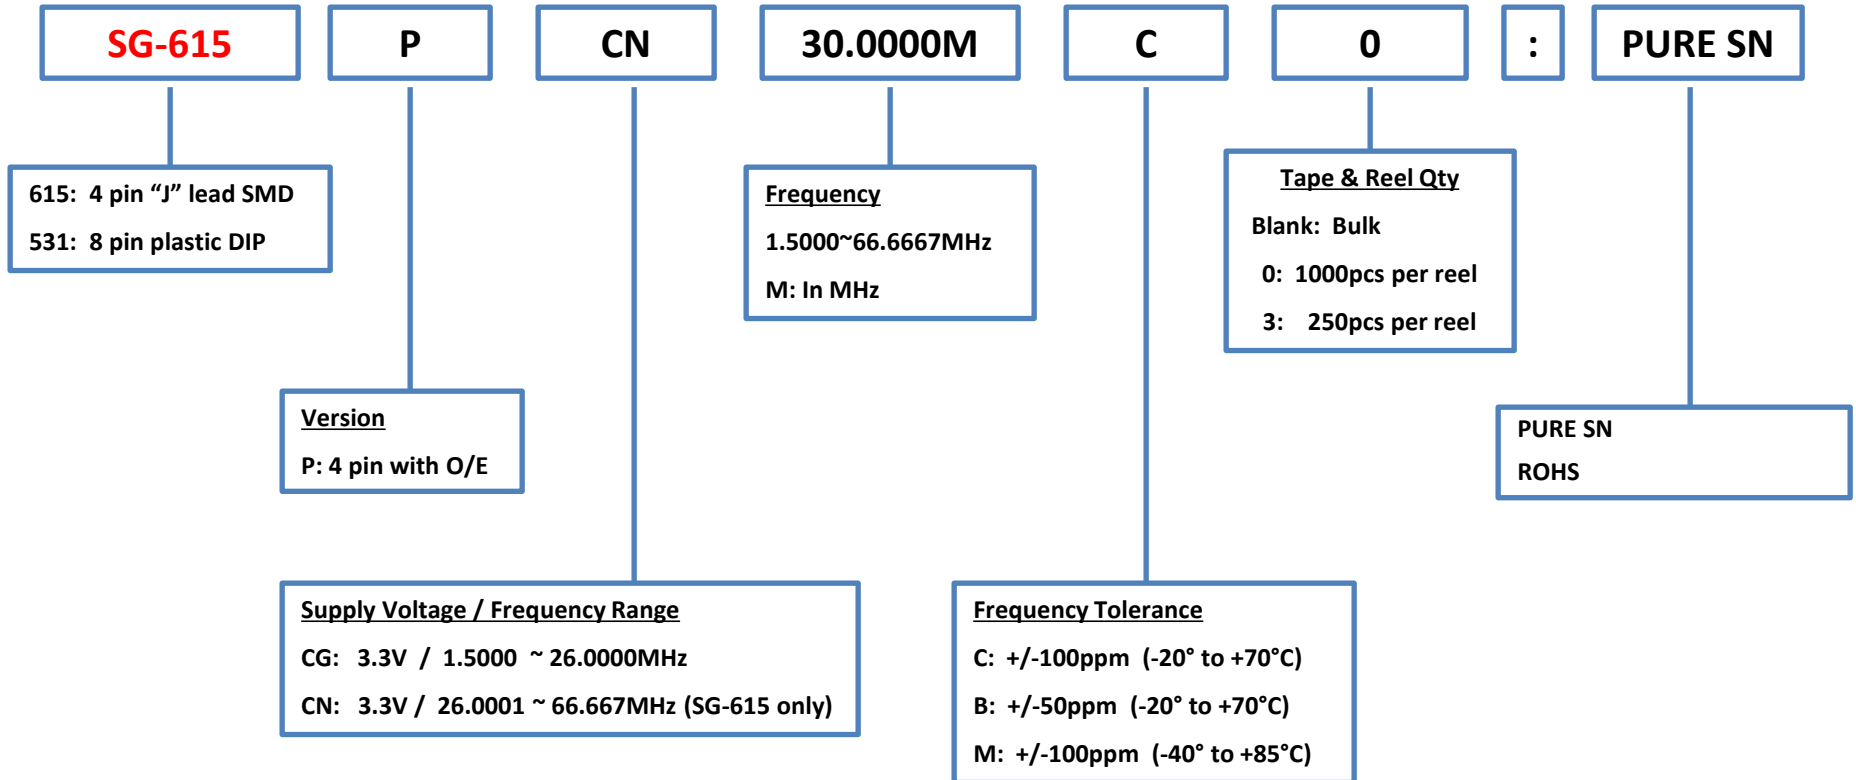

These packages also available in our SG-8002 programmable series.




Product Configuration System



Crystal Oscillators - SPXO

Discontinued

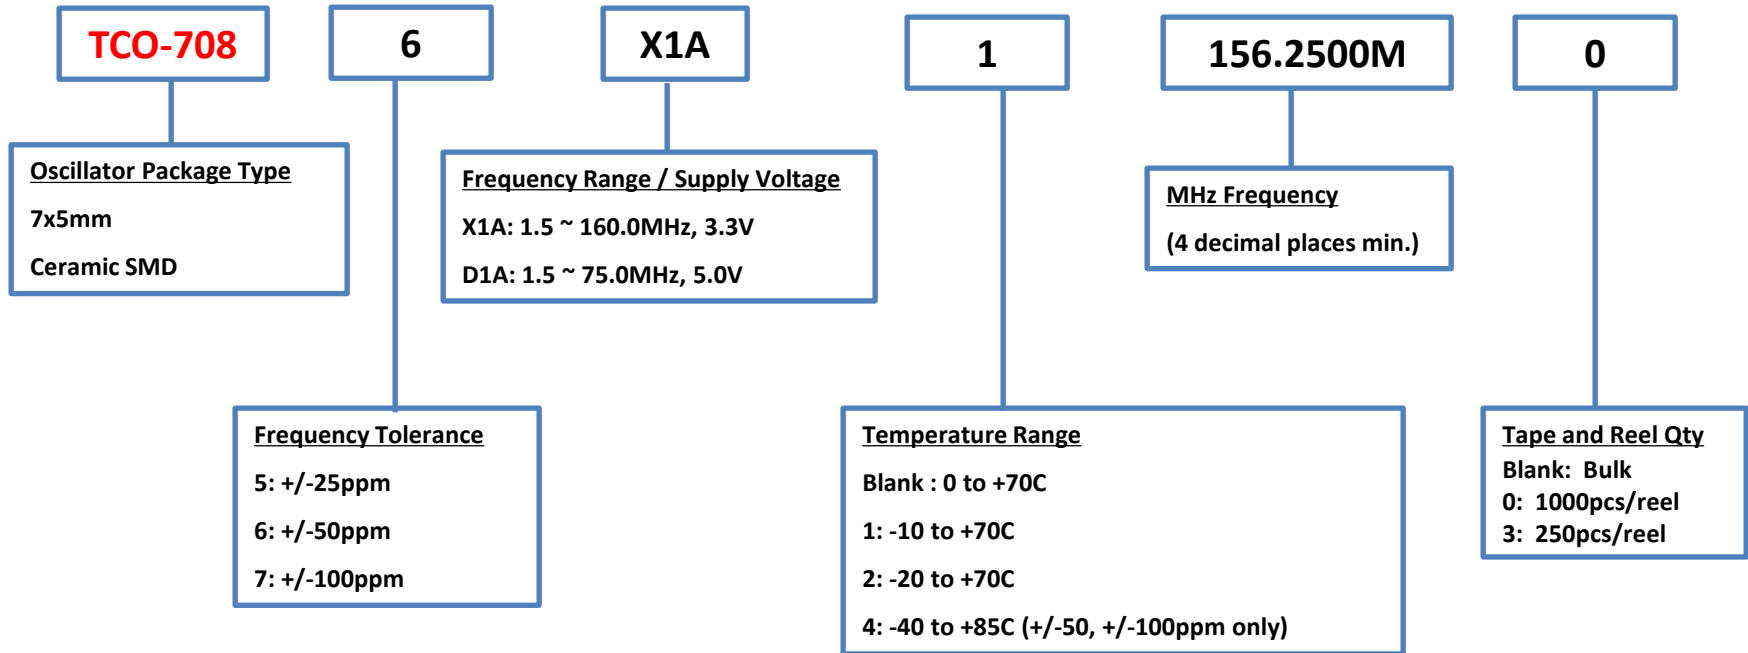


Product Configuration System



Crystal Oscillators - SPXO

Discontinued

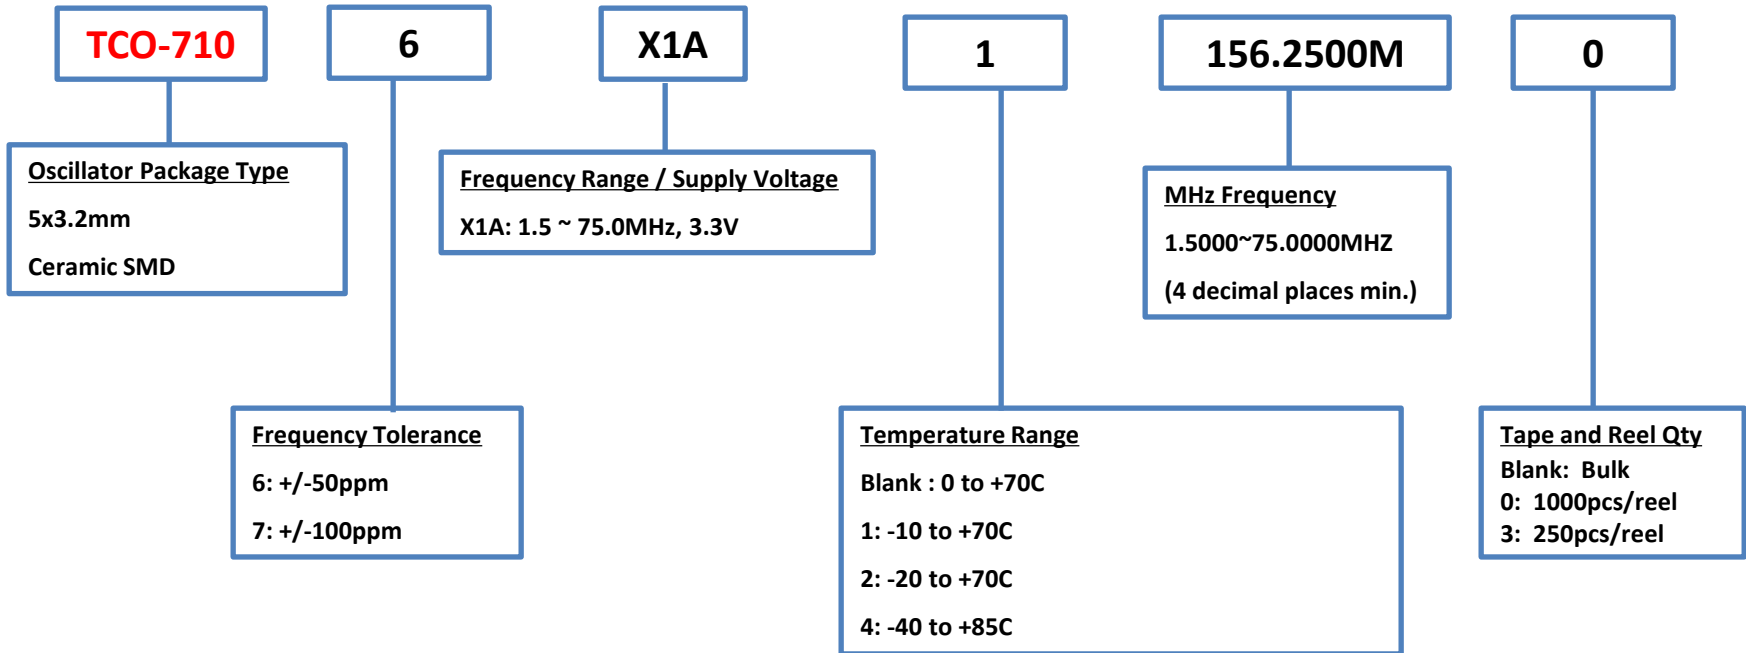


Product Configuration System




Crystal Oscillators - High Stability

Discontinued

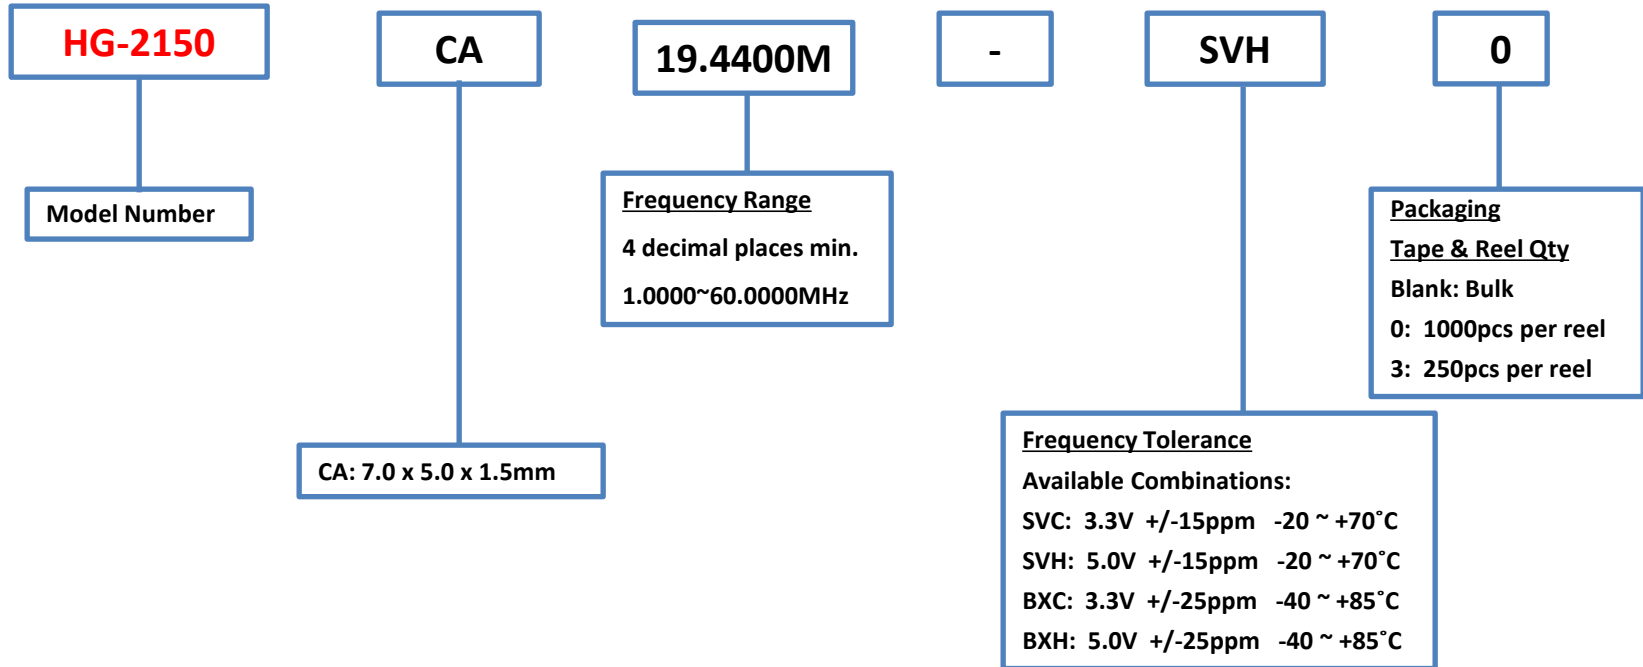

Product Configuration Guide

TCXO

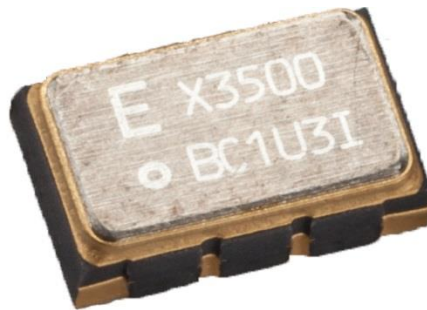

Product Configuration System



32.7680kHz TCXO

TG-3541CE

Base Model	Pkg.
TG-3541CE	3.2 x 2.5 x 1.0 mm
TG-3541CEA* *Automotive	10 PIN Ceramic

32.7680K

Frequency
32.7680kHz Only

XA

Frequency Temp Char
XA=
+/-1.9PPM 0°C to 50°C
+/-3.4PPM -40°C to 85°C
+/-8.0ppm 85°C to 105°C
XB=
+/-1.9PPM 0°C to 50°C
+/-5.0PPM -40°C to 85°C
+/-8.0ppm 85°C to 105°C

0

Tape & Reel Qty
B: Bulk
2: 500pcs/reel
0: 1000pcs/reel
6: 2000pcs/reel

***Automotive Grade product
Approved Customer & Application only
Contact your Epson rep. for support**

EPSON

August 2024


NOTE:

Please contact Epson for requirements not listed in this specification.

Product Configuration System



TCXO/VC-TCXO High Stability

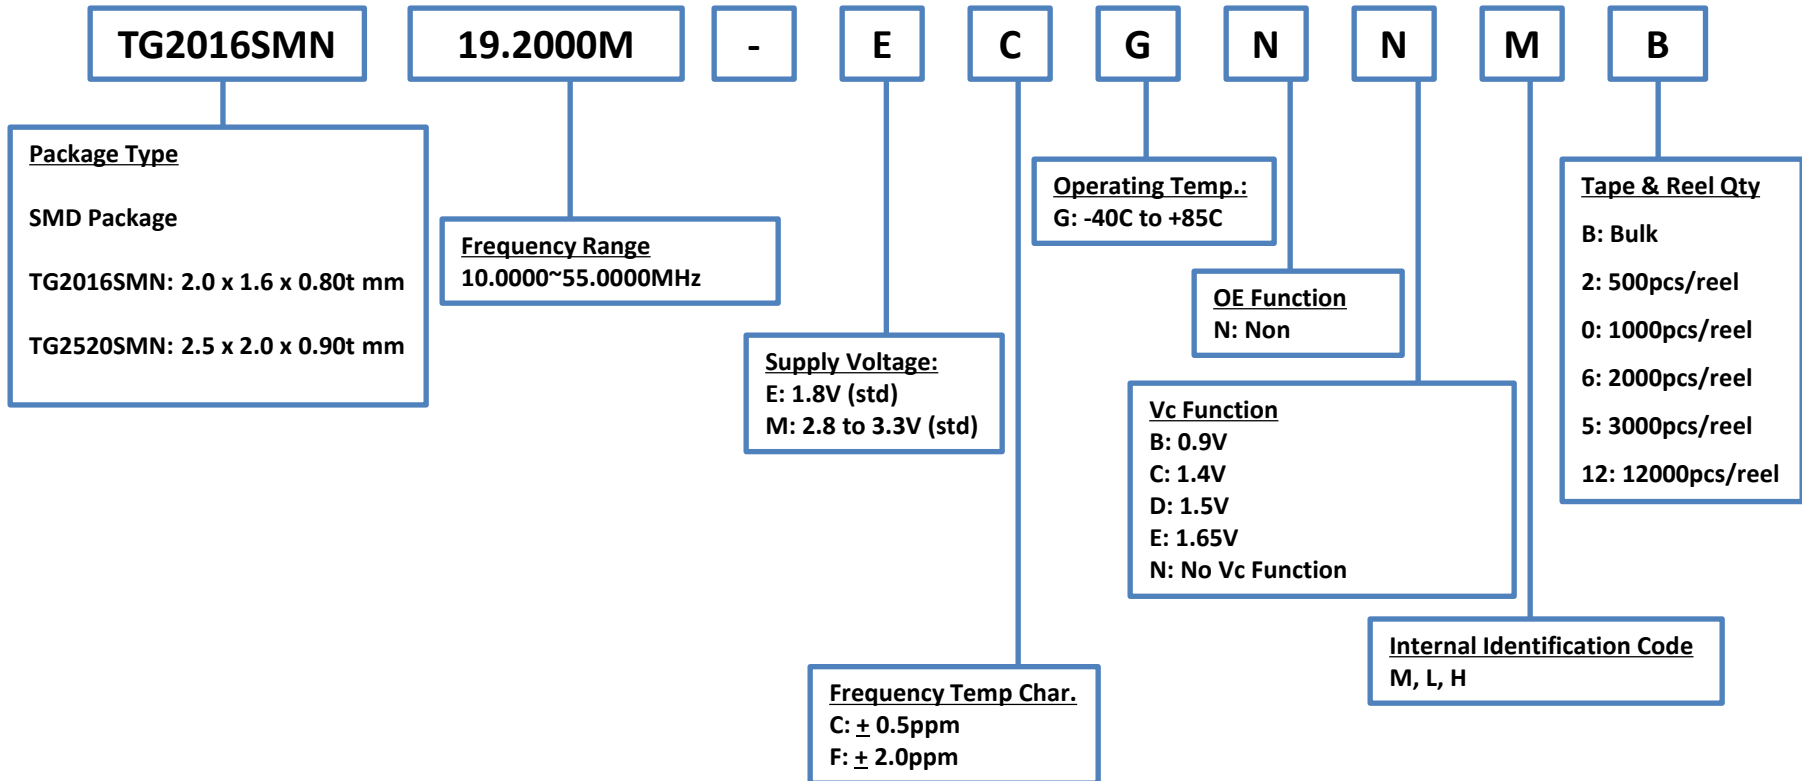


NOTE:

Please contact Epson for requirements not listed in this specification.

Product Configuration System



TCXO/VC-TCXO High Stability

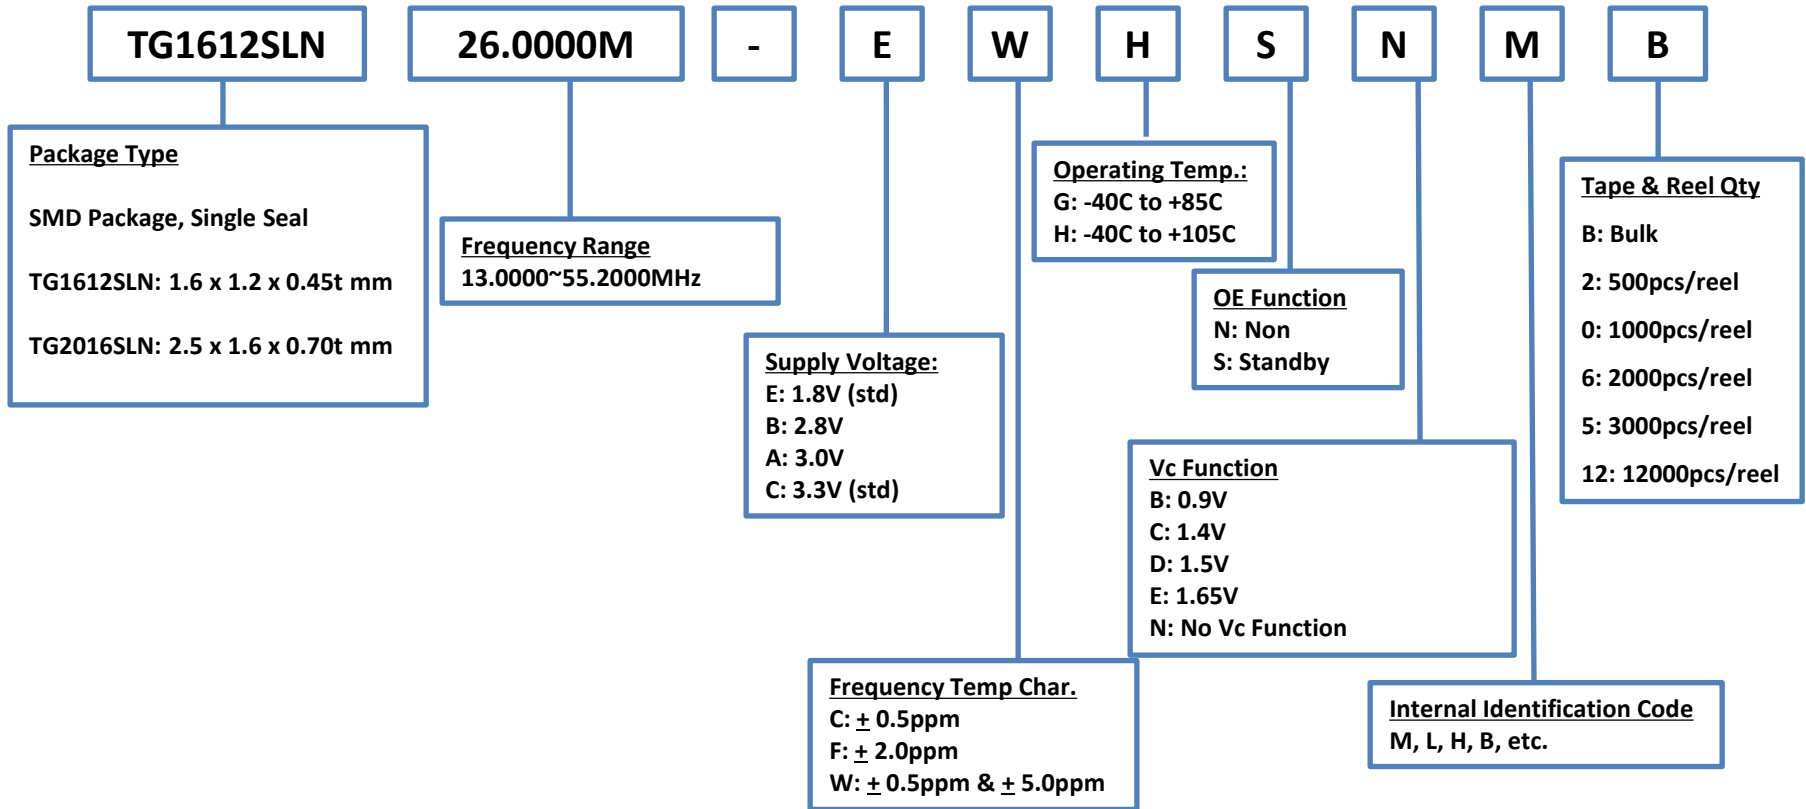

EPSON

August 2024

NOTE:


Stability "CG" (+/-0.5ppm -40/85C) , "WH" (+/- 0.5 & +/-5.0ppm -40/105C) are available. For stability +/-0.5ppm -40/105C, please see TG2016SKA with stability "CH"

Please contact Epson for requirements not listed in this specification.

Product Configuration System



TCXO/VC-TCXO High Stability for Automotive

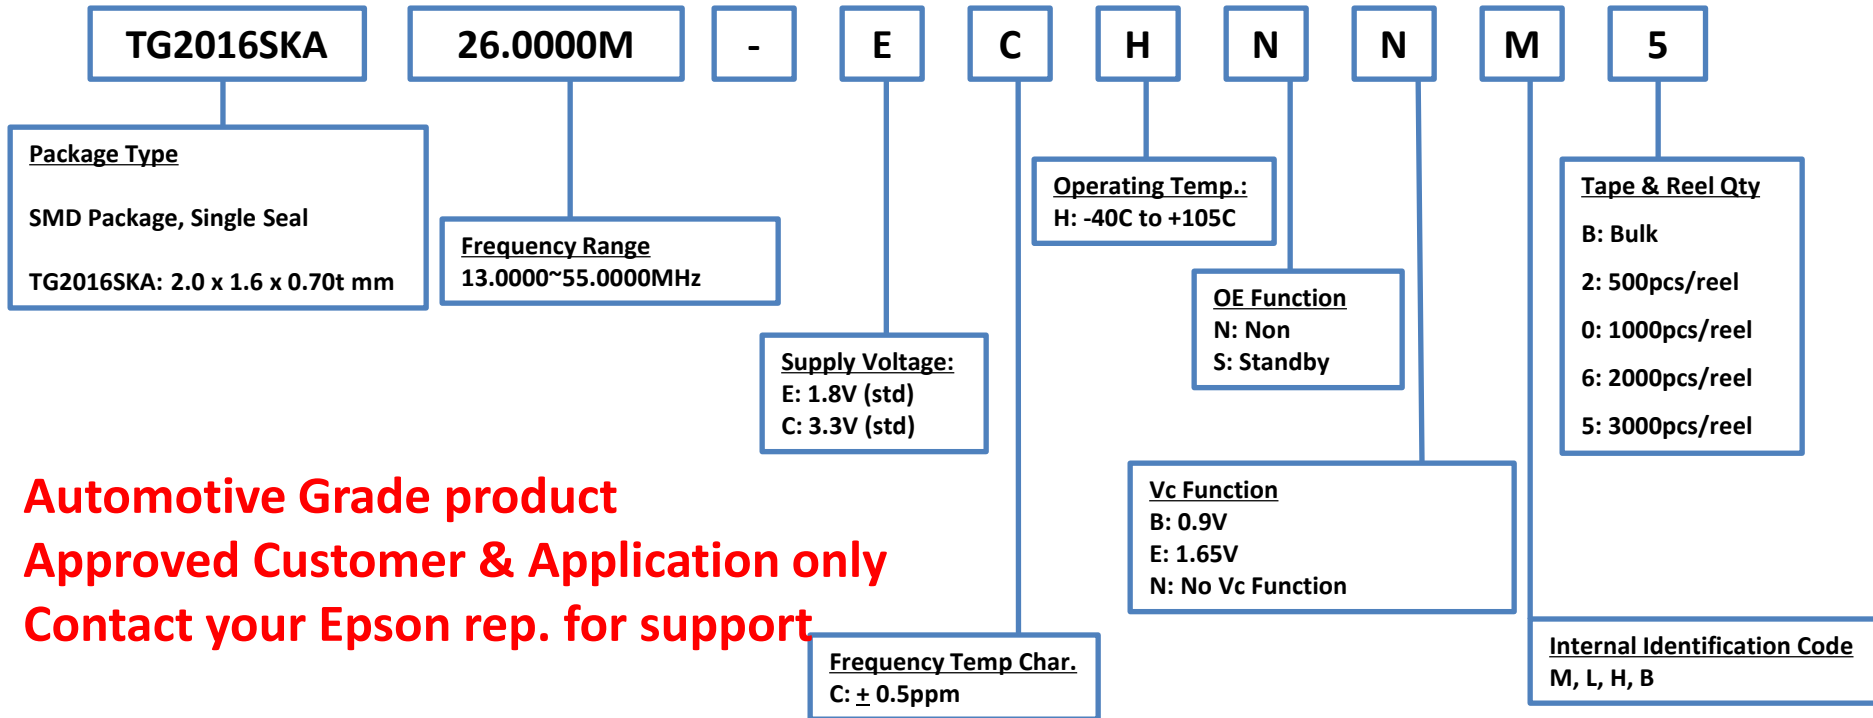

Automotive Grade product
Approved Customer & Application only
Contact your Epson rep. for support

NOTE:


Please contact us for requirements not listed in this specification.



Product Configuration System



TCXO/VC-TCXO High Stability for Automotive

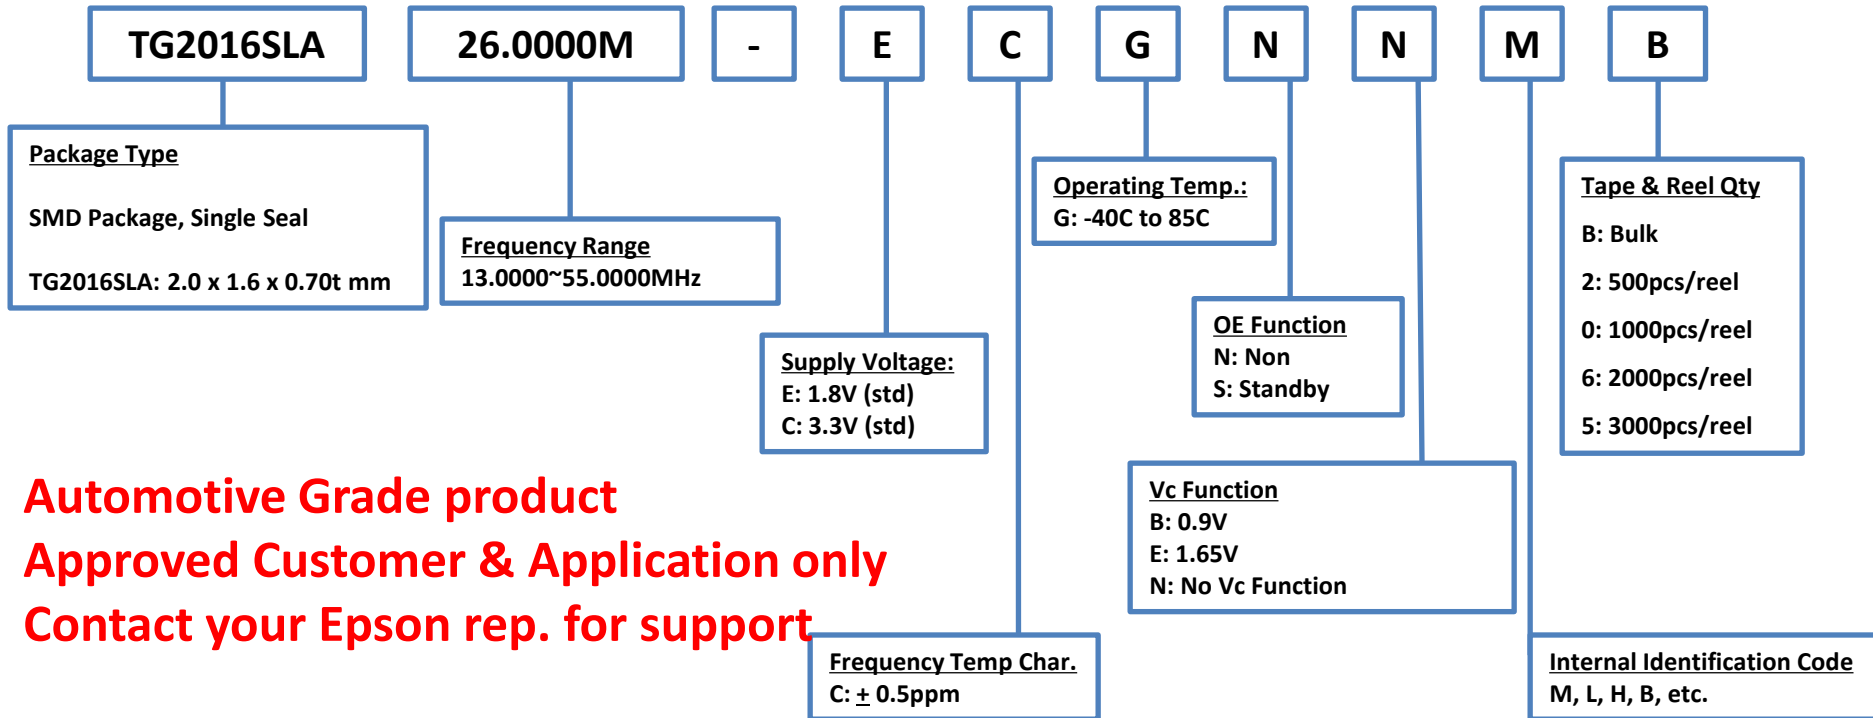

Automotive Grade product
Approved Customer & Application only
Contact your Epson rep. for support



NOTE:

Stability "CG" (+/-0.5ppm -40/85C) are available. For stability +/-0.5ppm -40/105C, please see TG2016SKA with stability "CH"


Please contact us for requirements not listed in this specification.

Product Configuration System



TCXO

Discontinued

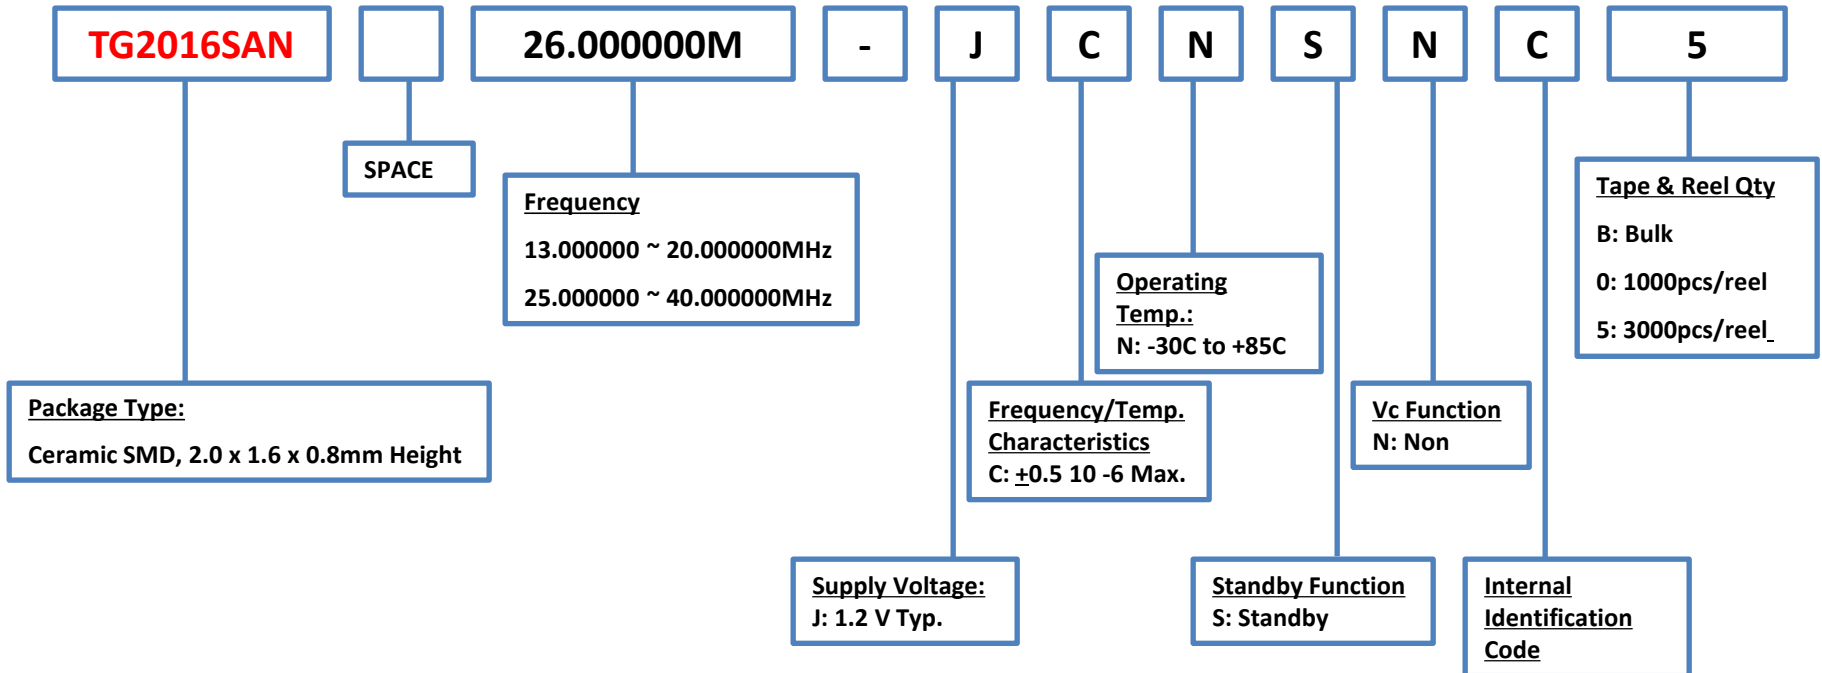

NOTE:

Please contact us for requirements not listed in this specification.


EPSON

August 2024

Product Configuration System



TCXO/VC-TCXO High Stability

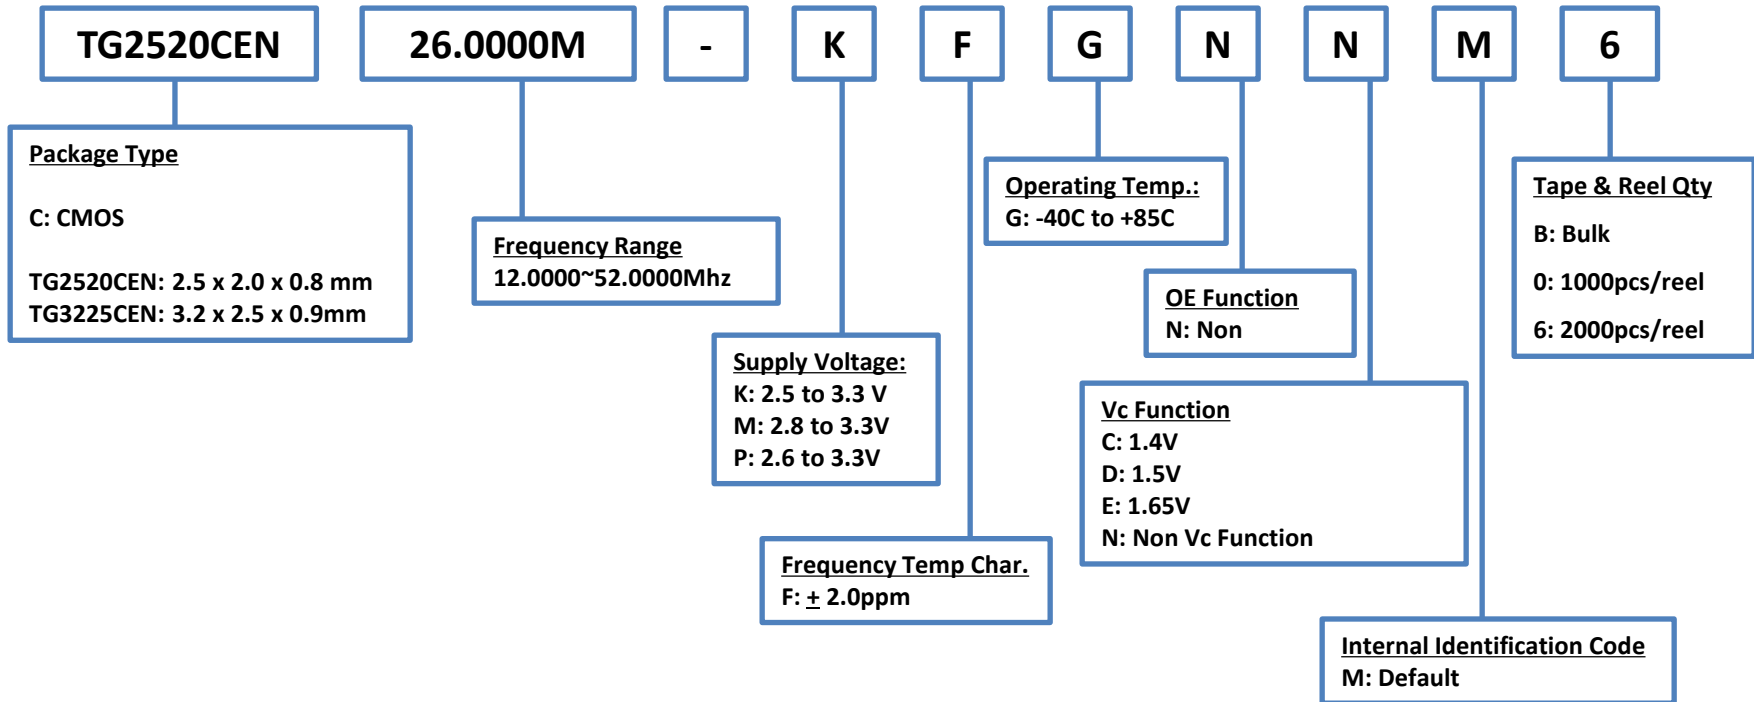

NOTE:


Please contact Epson for requirements not listed in this specification.

Product Configuration System



TCXO/VC-TCXO High Stability

Discontinued

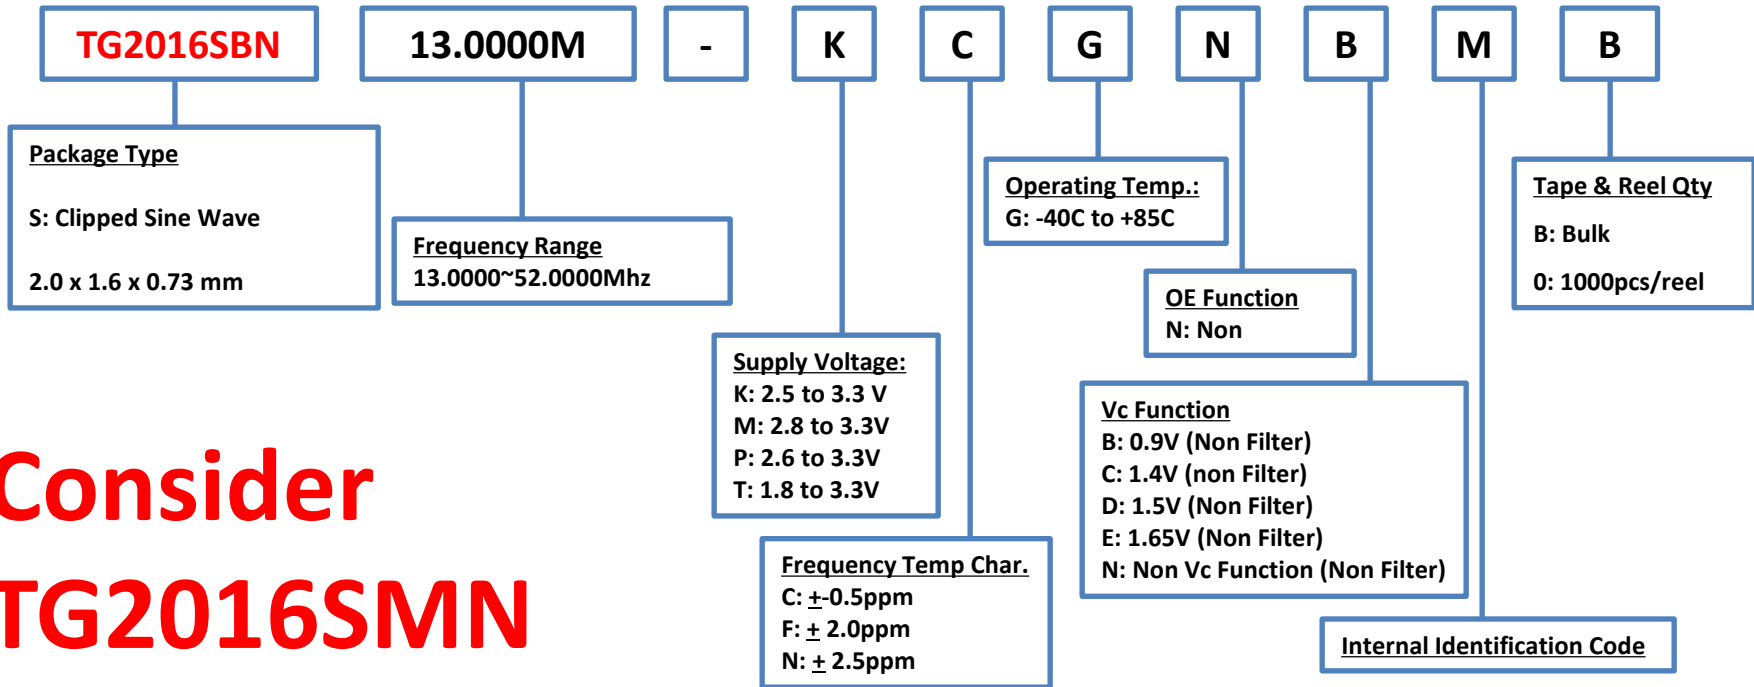

Consider TG2016SMN

NOTE:

Please contact us for requirements not listed in this specification.




Product Configuration System



TCXO/VC-TCXO High Stability

Discontinued

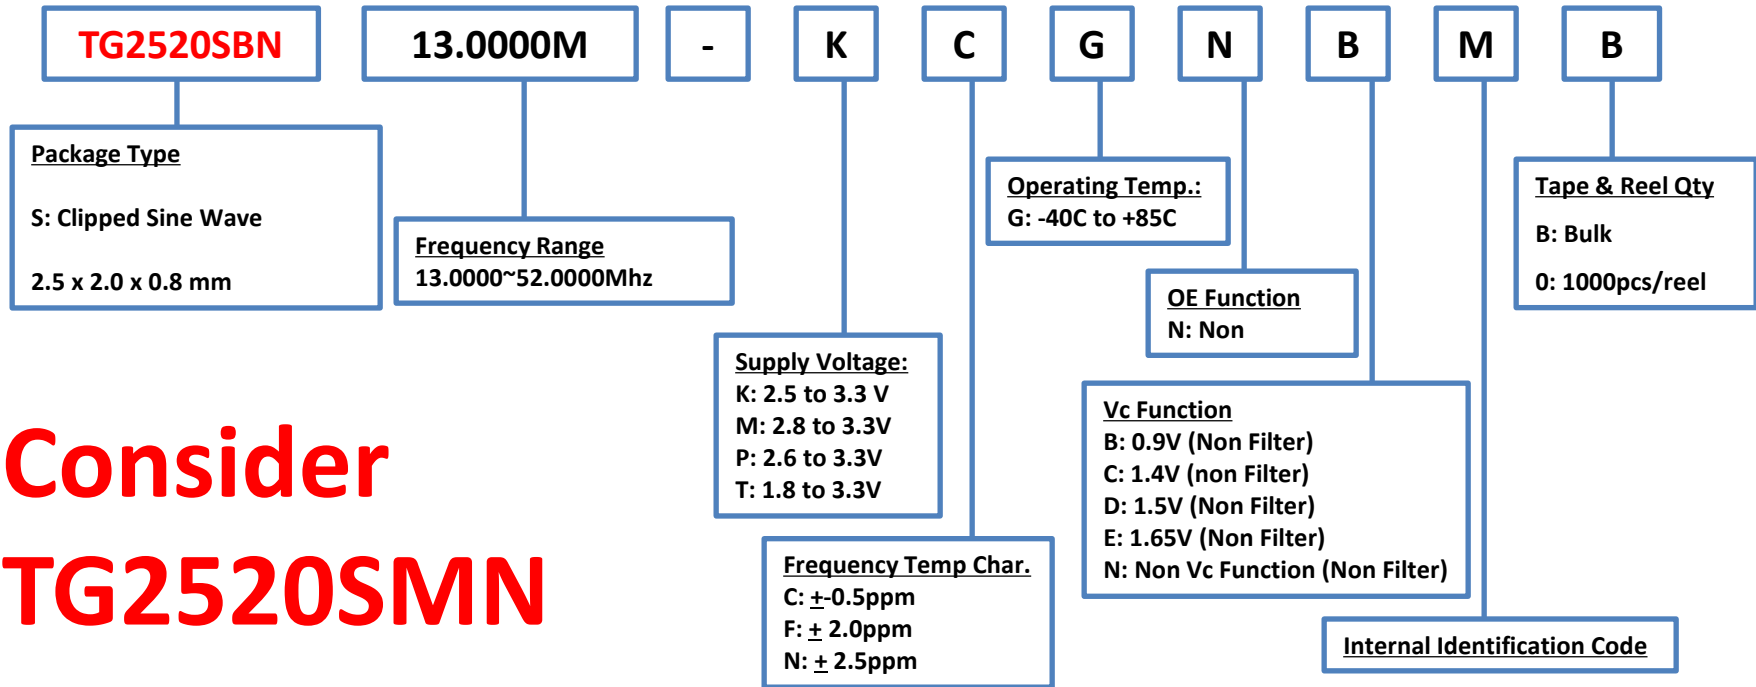

Consider TG2520SMN

NOTE:

Please contact us for requirements not listed in this specification.



Product Configuration System



TCXO

TG-5006CJ

-

xxx

19.2000M

Package Type:

TG-5006CJ - 2.0 X 1.6 X 0.8 mm
TG-5006CG - 2.5 X 2.0 X 0.9 mm
TG-5006CE - 3.2 X 2.5 X 1.0 mm

TG-5035CJ - 2.0 X 1.6 X 0.8 mm
TG-5035CG - 2.5 X 2.0 X 0.9 mm
TG-5035CE - 3.2 X 2.5 X 1.0 mm

TG-5031CJ - 2.0 X 1.6 X 0.8 mm
TG-5021CG - 2.5 X 2.0 X 0.9 mm
TG-5021CE - 3.2 X 2.5 X 1.0 mm

Specification Code:

Issued by Epson after reviewing customer requirements

Frequency

TG-5006CJ/CG/CE: 13 ~ 52MHz
STD Freqs: 16.367667, 16.368, 16.369, 19.2, 26, 38.4MHz

TG-5035CE: 10 ~ 40 MHz
TG-5035CJ/CG/: 13 ~ 52MHz
STD Freqs: 13, 16.368, 16.369, 19.2, 26, 38.4MHz

TG-5031CJ/TG-5021CG: 13 ~ 52MHz
TG-5021CE: 10 ~ 40MHz
STD Freqs: 13, 19.2, 26, 38.4MHz

EPSON

August 2024

NOTE:


Please contact us for requirements not listed in this specification.

Product Configuration System



TCXO/VC-TCXO
Ultra High Stability

Discontinued

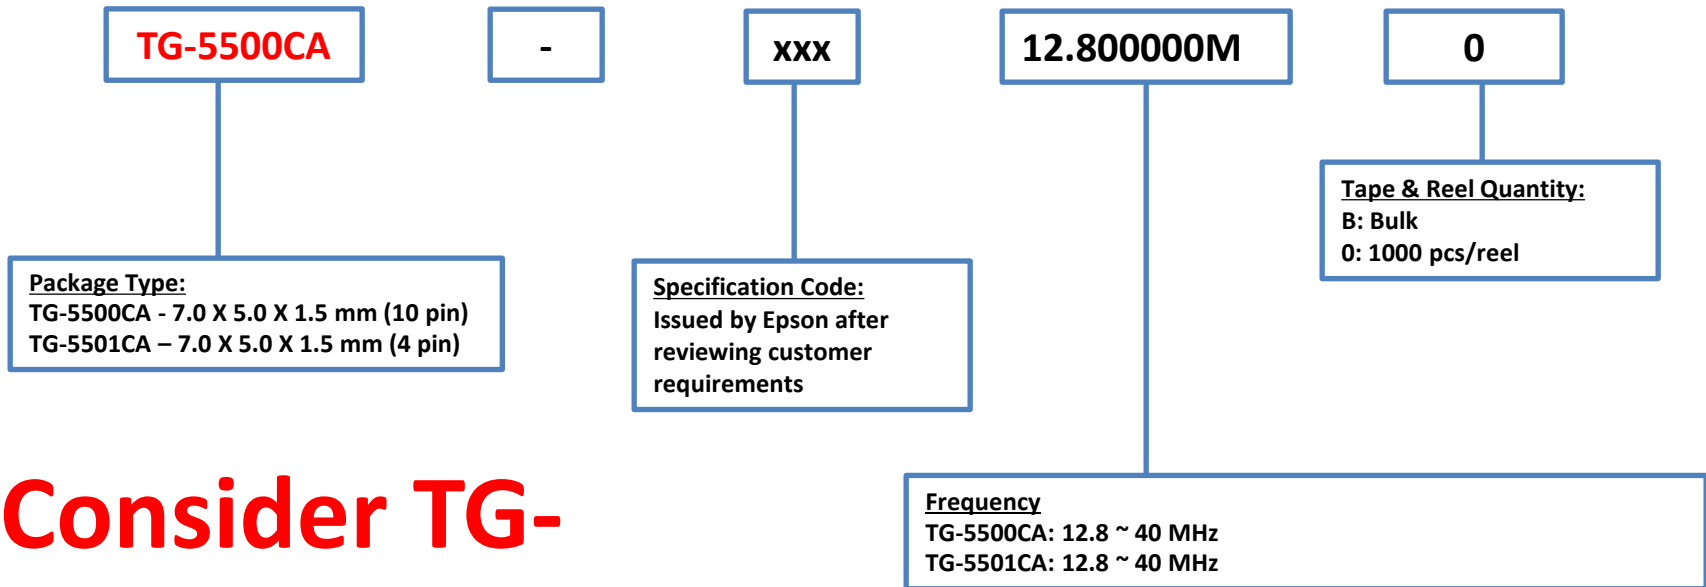

Consider TG-5510CA

August 2024


NOTE:

Please contact us for requirements not listed in this specification.

Product Configuration System



TCXO/VC-TCXO Ultra High Stability

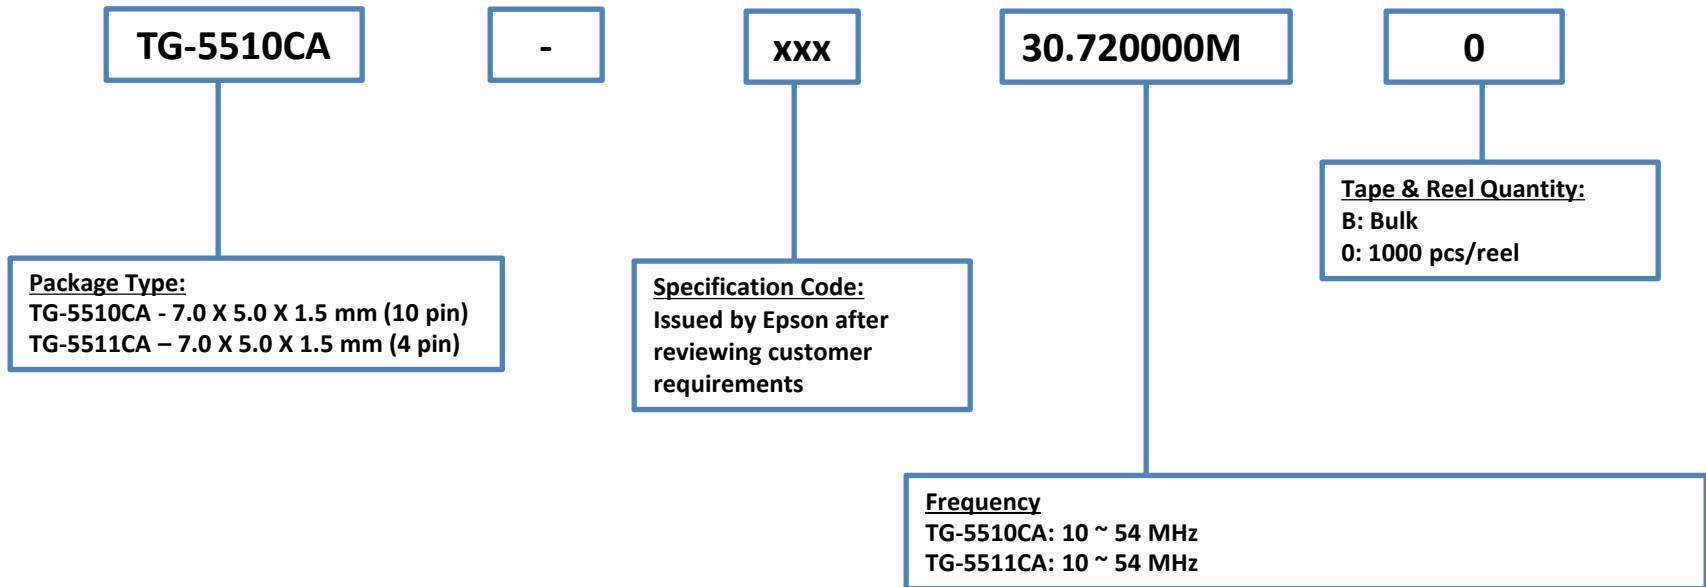

EPSON

August 2024


NOTE:

Please contact us for requirements not listed in this specification.

Product Configuration System



TCXO/VC-TCXO Ultra High Stability

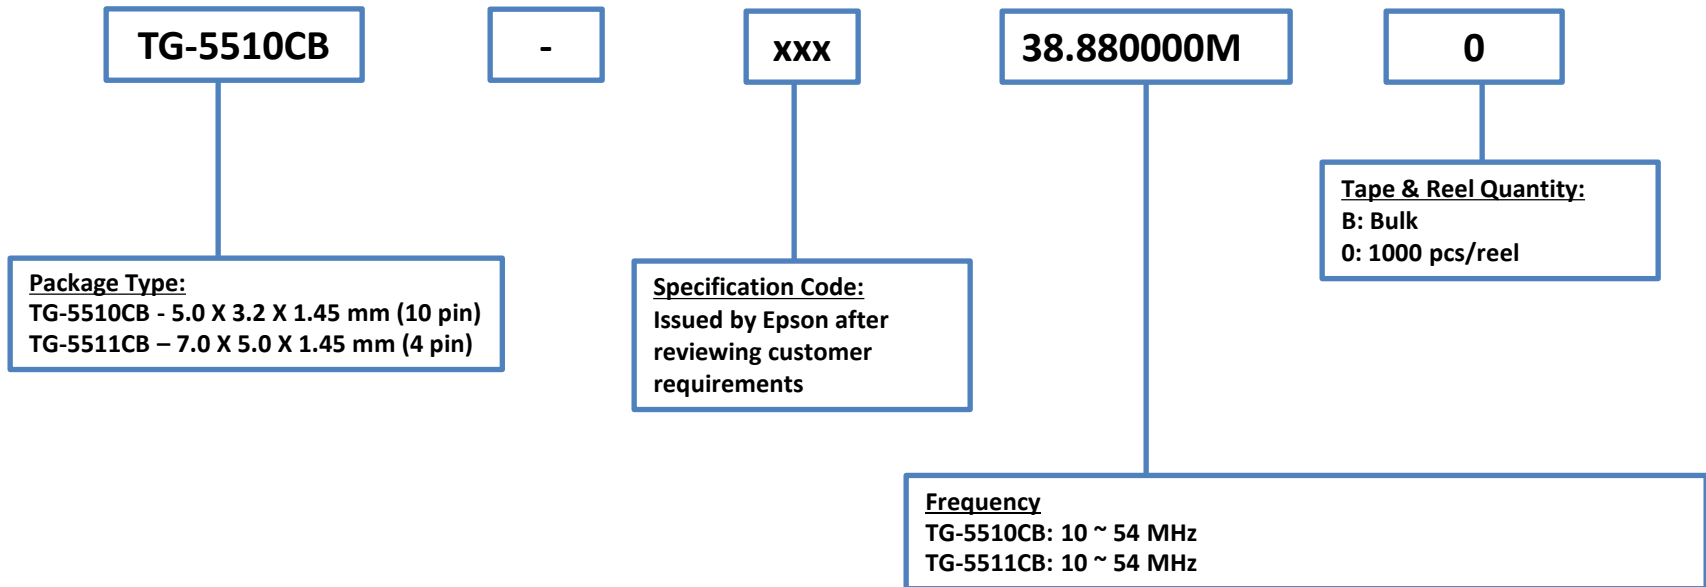

NOTE:


Please contact us for requirements not listed in this specification.

Product Configuration System



TCXO/VC-TCXO Ultra High Stability

Discontinued

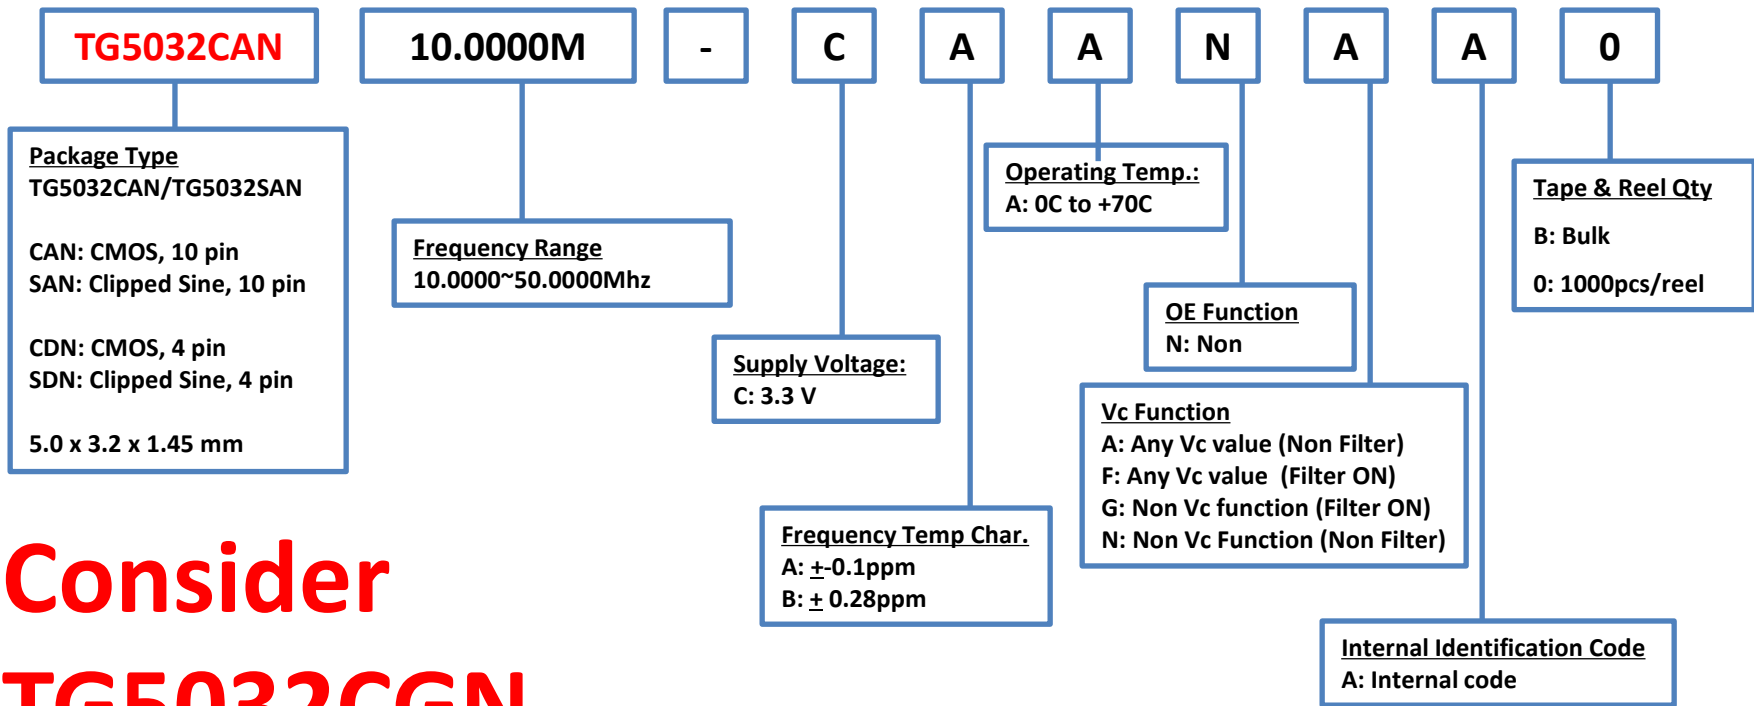

Consider TG5032CGN

EPSON

August 2024

NOTE:


Please contact us for requirements not listed in this specification. 104

Product Configuration System



TCXO/VC-TCXO Ultra High Stability

Discontinued

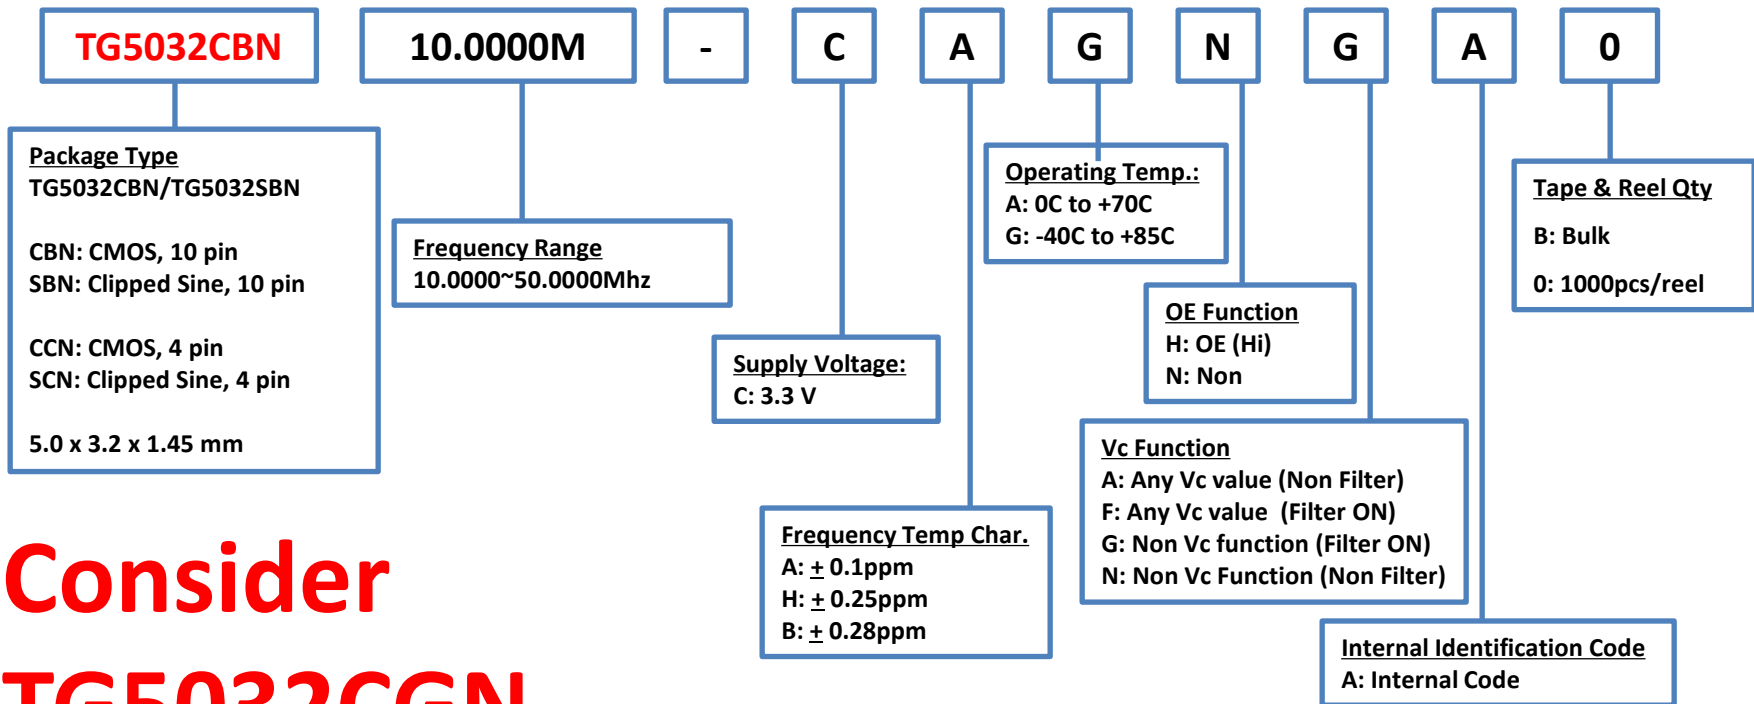

Consider TG5032CGN

EPSON

August 2024


NOTE:

Please contact us for requirements not listed in this specification. 105

Product Configuration System



TCXO/VC-TCXO Ultra High Stability

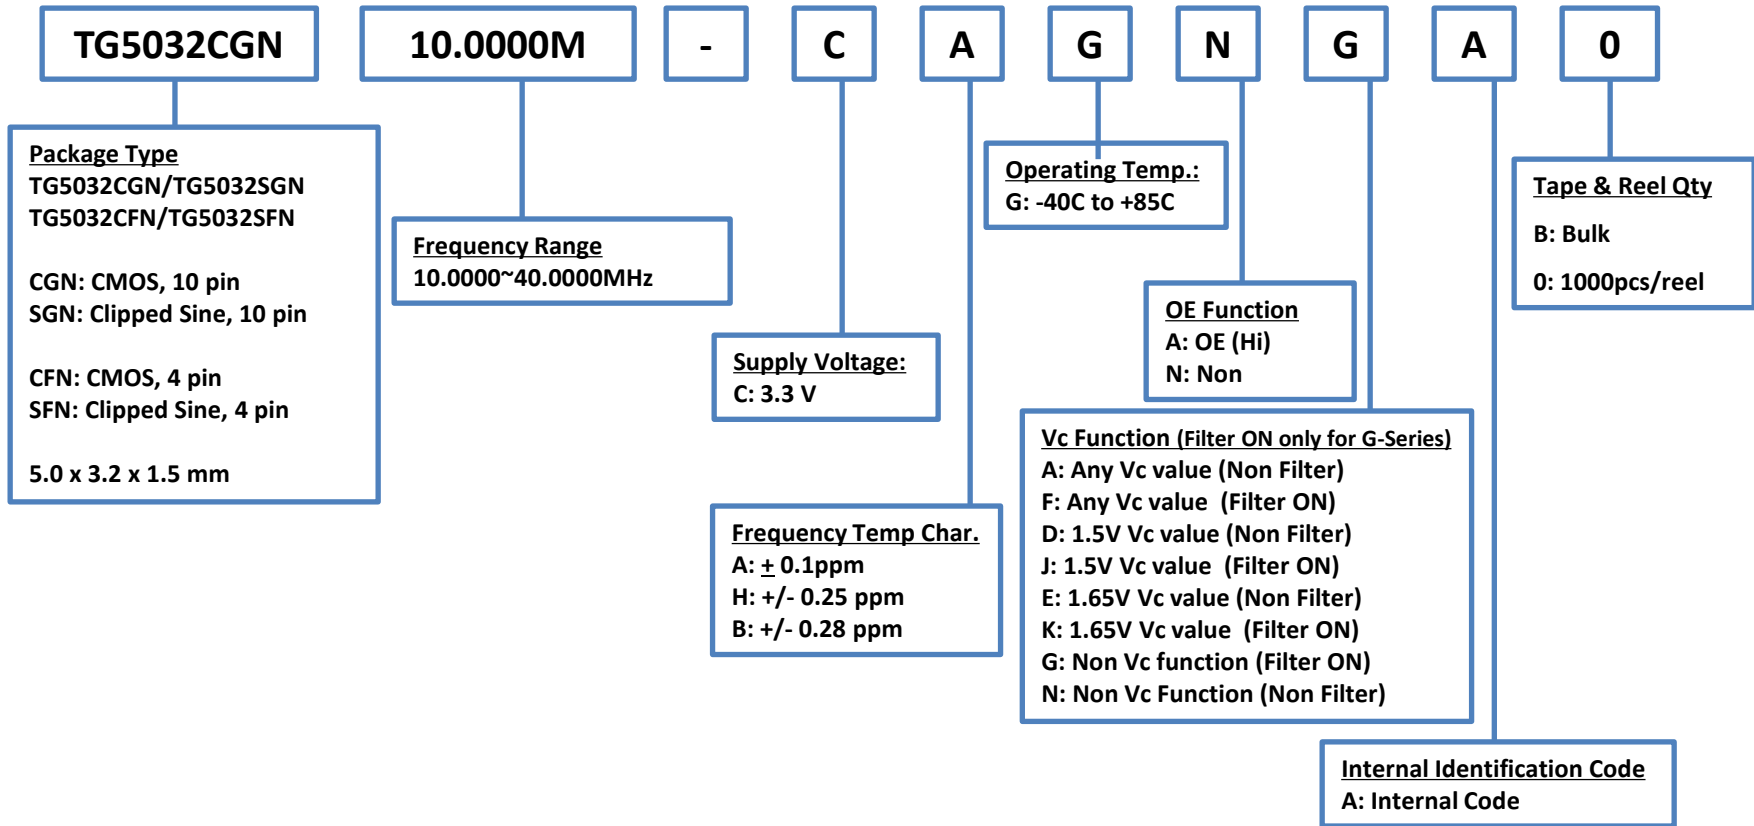

August 2024


NOTE:

Please contact us for requirements not listed in this specification. 106

Product Configuration System




TCXO/VC-TCXO Ultra High Stability

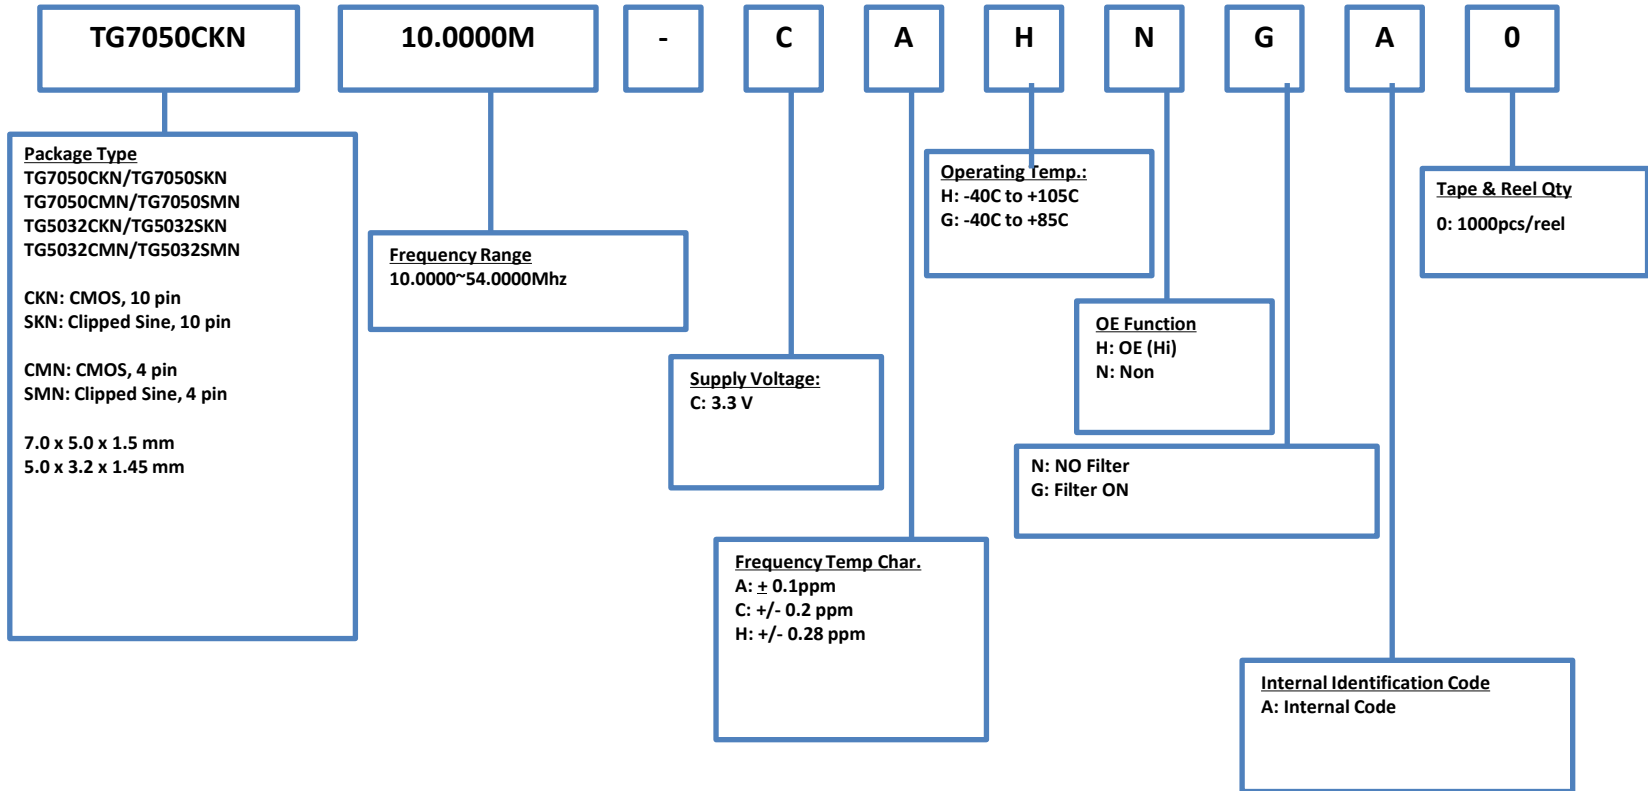

NOTE:
Please contact us for requirements not listed in this specification.

Product Configuration Guide

SAW OSCILLATORS

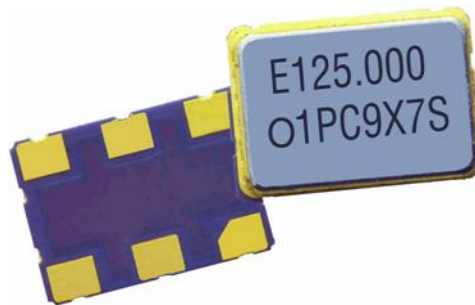


Product Configuration System



Crystal Oscillators – Low Jitter (SAW)

Not Recommended

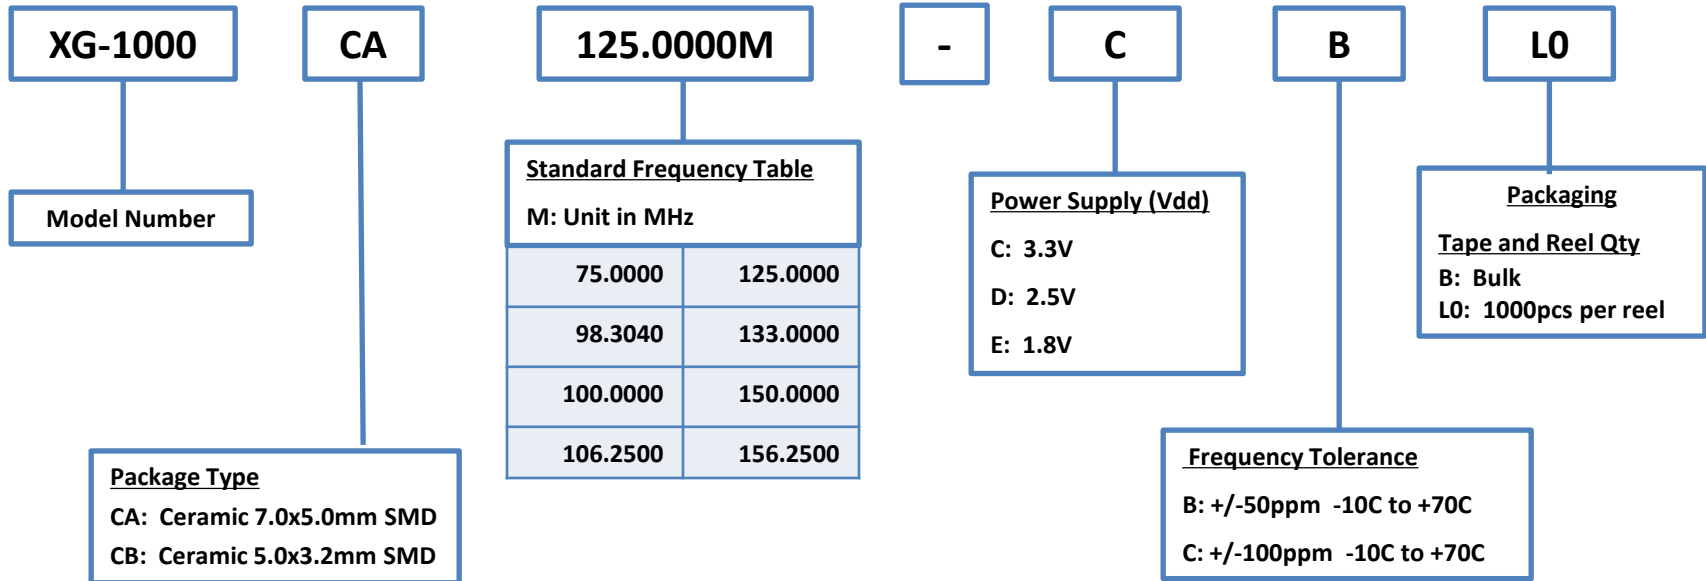


Product Configuration System



Crystal Oscillators – Low Jitter (SAW)

Not Recommended

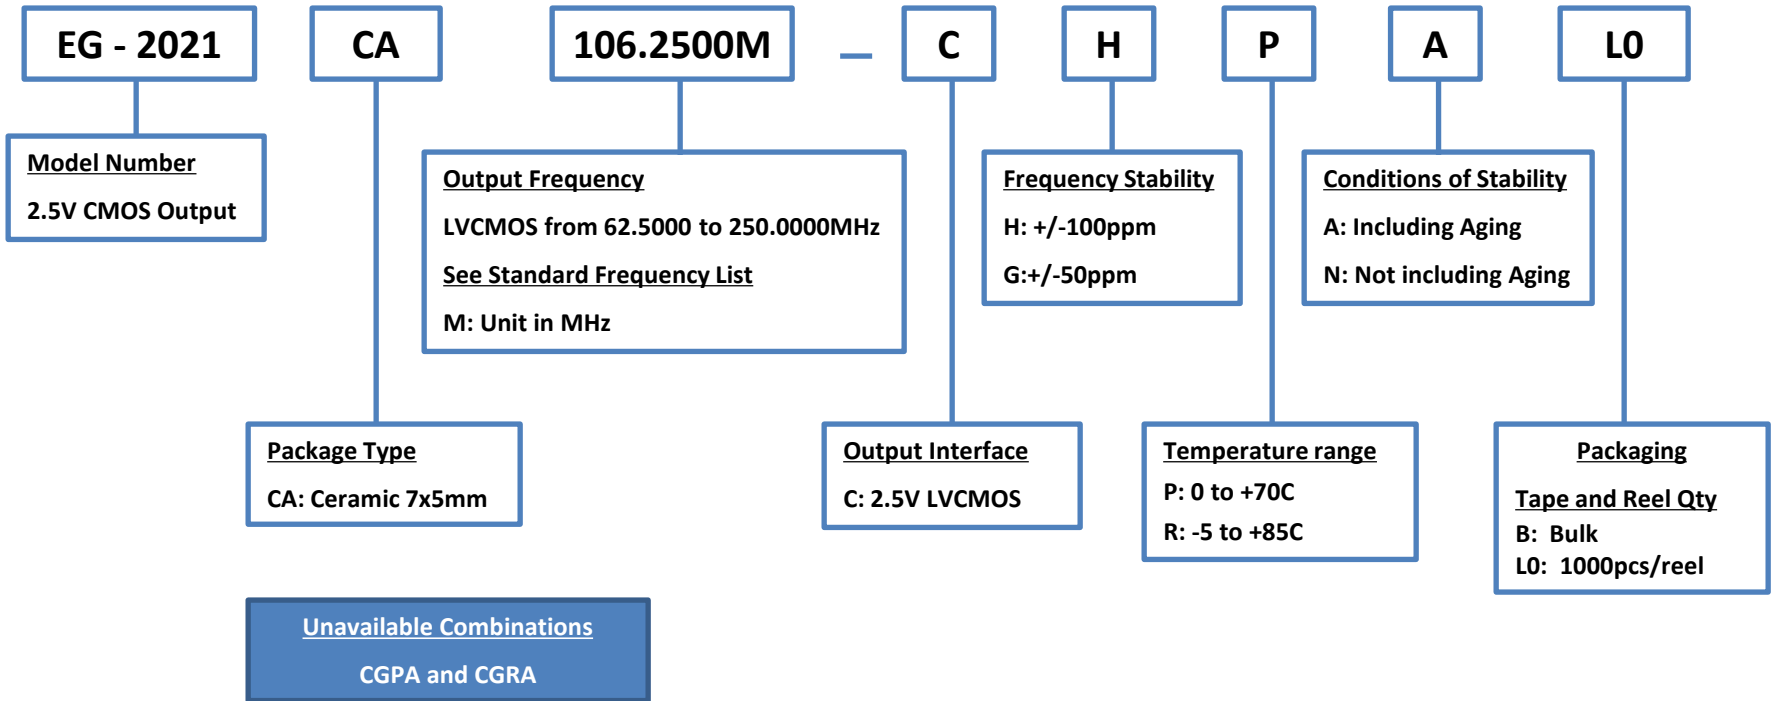

Standard Frequencies

EG-2021CA (2.5V CMOS)


62.5000	125.0000
66.5000	133.0000
75.0000	150.0000
78.1250	156.2500
90.0000	250.0000
98.3040	
100.0000	
106.2500	
108.0000	
124.4160	

Product Configuration System



Crystal Oscillators – Low Jitter (SAW)

Not Recommended

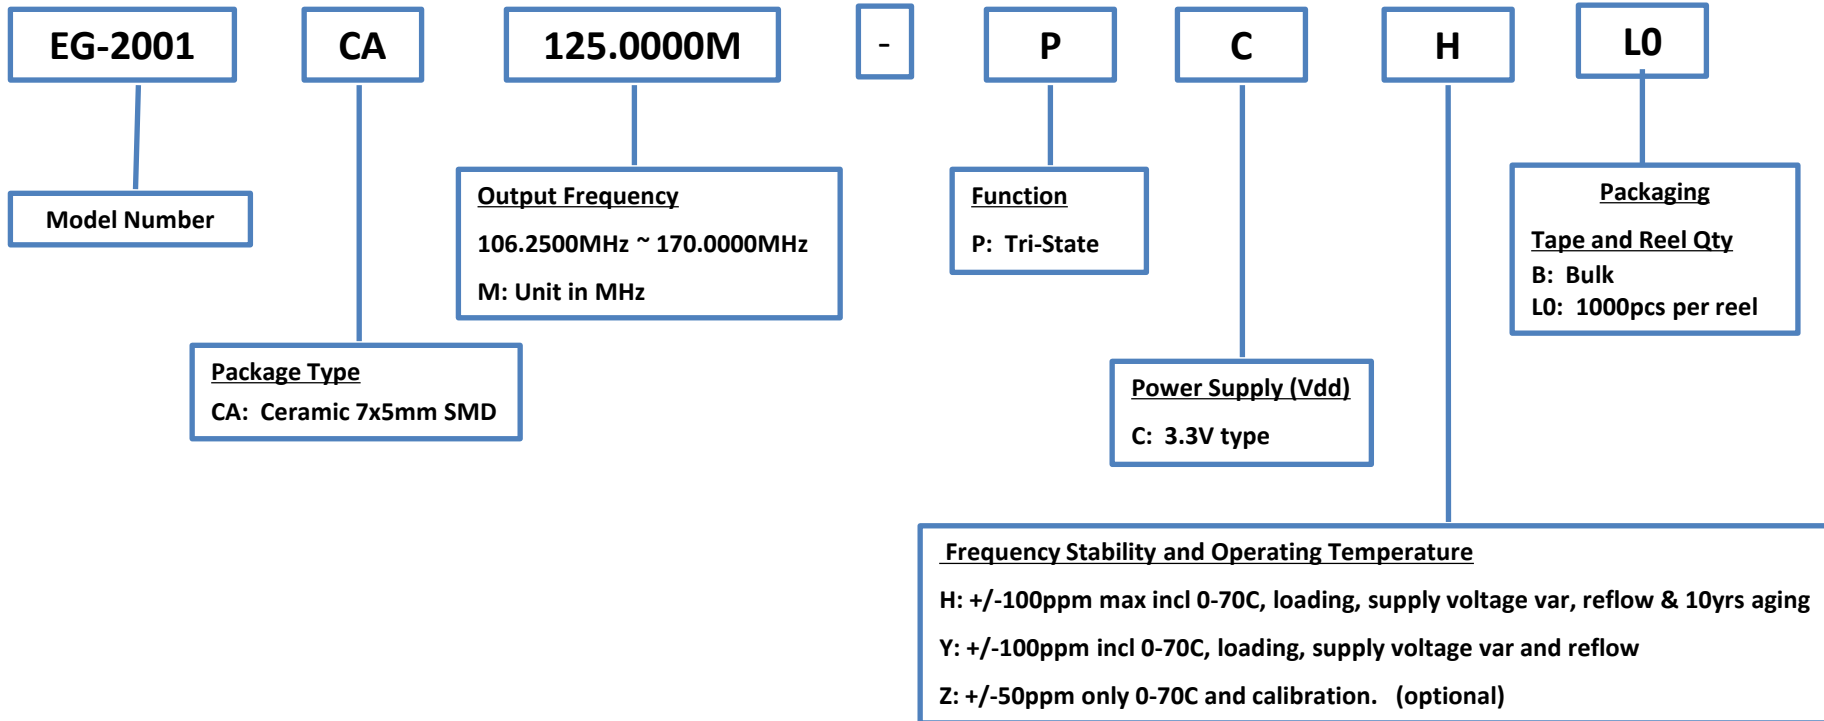

Standard Frequencies

EG-2001 (3.3V CMOS)


106.2500	155.5200
108.0000	156.2500
125.0000	159.3750
128.0000	160.0000
132.8125	161.1328
133.0000	166.0000
133.3333	166.6285
135.0000	166.6667
143.0000	167.3316
150.0000	

Product Configuration System



Crystal Oscillators – Low Jitter (SAW)

Discontinued

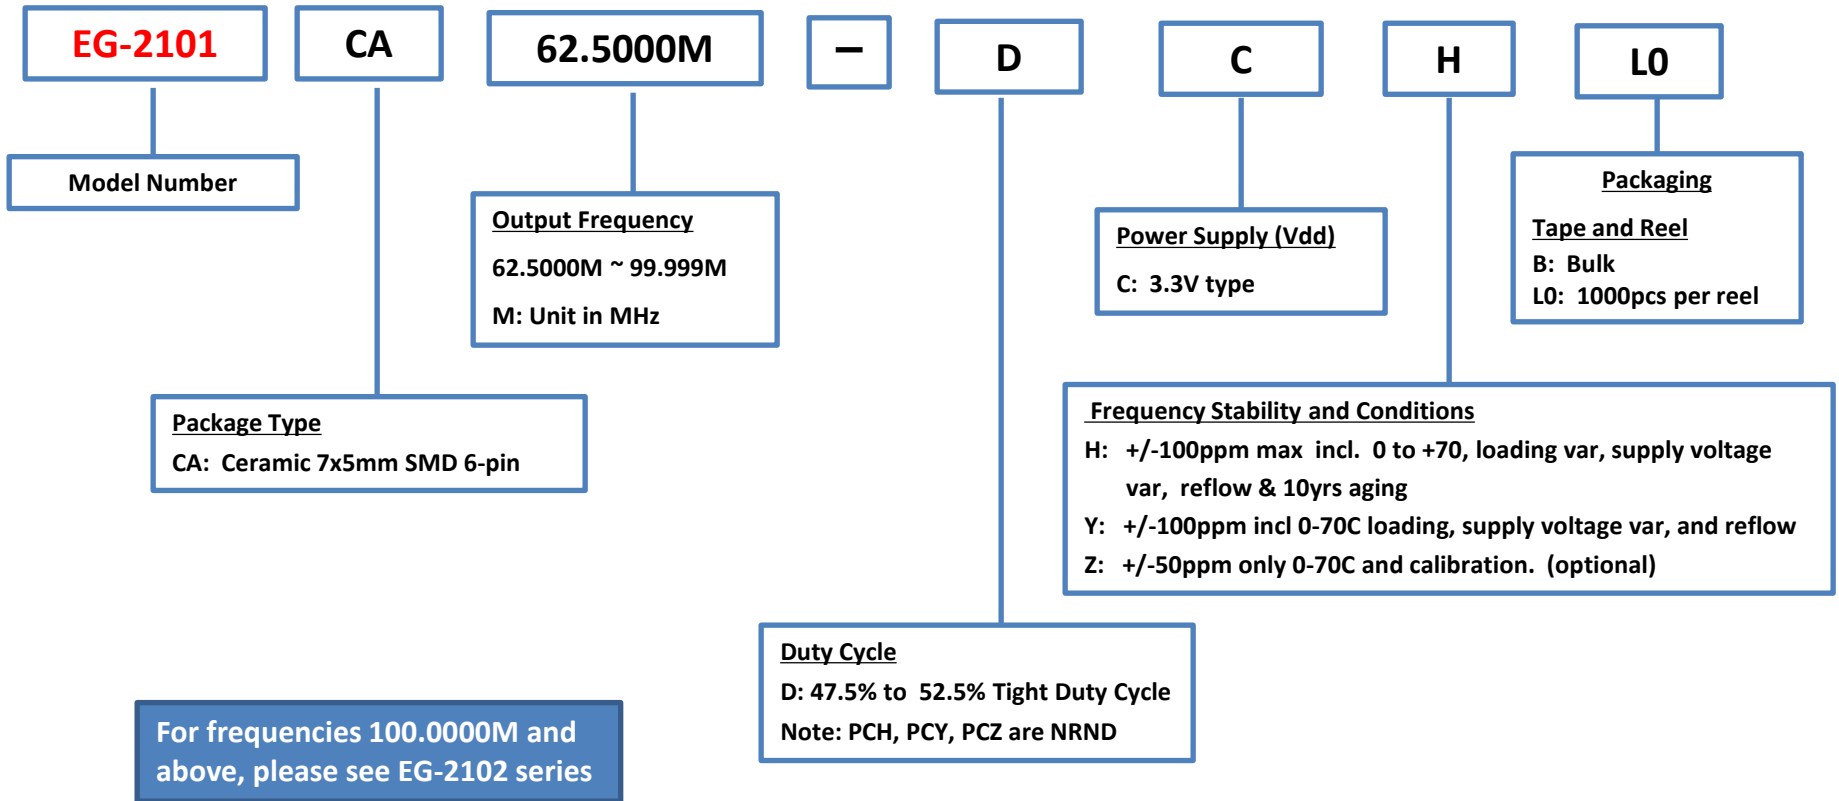

Standard Frequencies

EG-2101

EG-2101CA DCx	
62.5000	79.6875
64.0000	80.0000
66.4063	80.5664
66.5000	83.0000
66.6667	83.3143
67.5000	83.3333
71.5000	83.6658
75.0000	87.5000
77.7600	90.0000
78.1250	

For frequencies 100.0000M and above, please see EG-2102 series




Product Configuration System



Crystal Oscillators – Low Jitter (SAW)

Discontinued

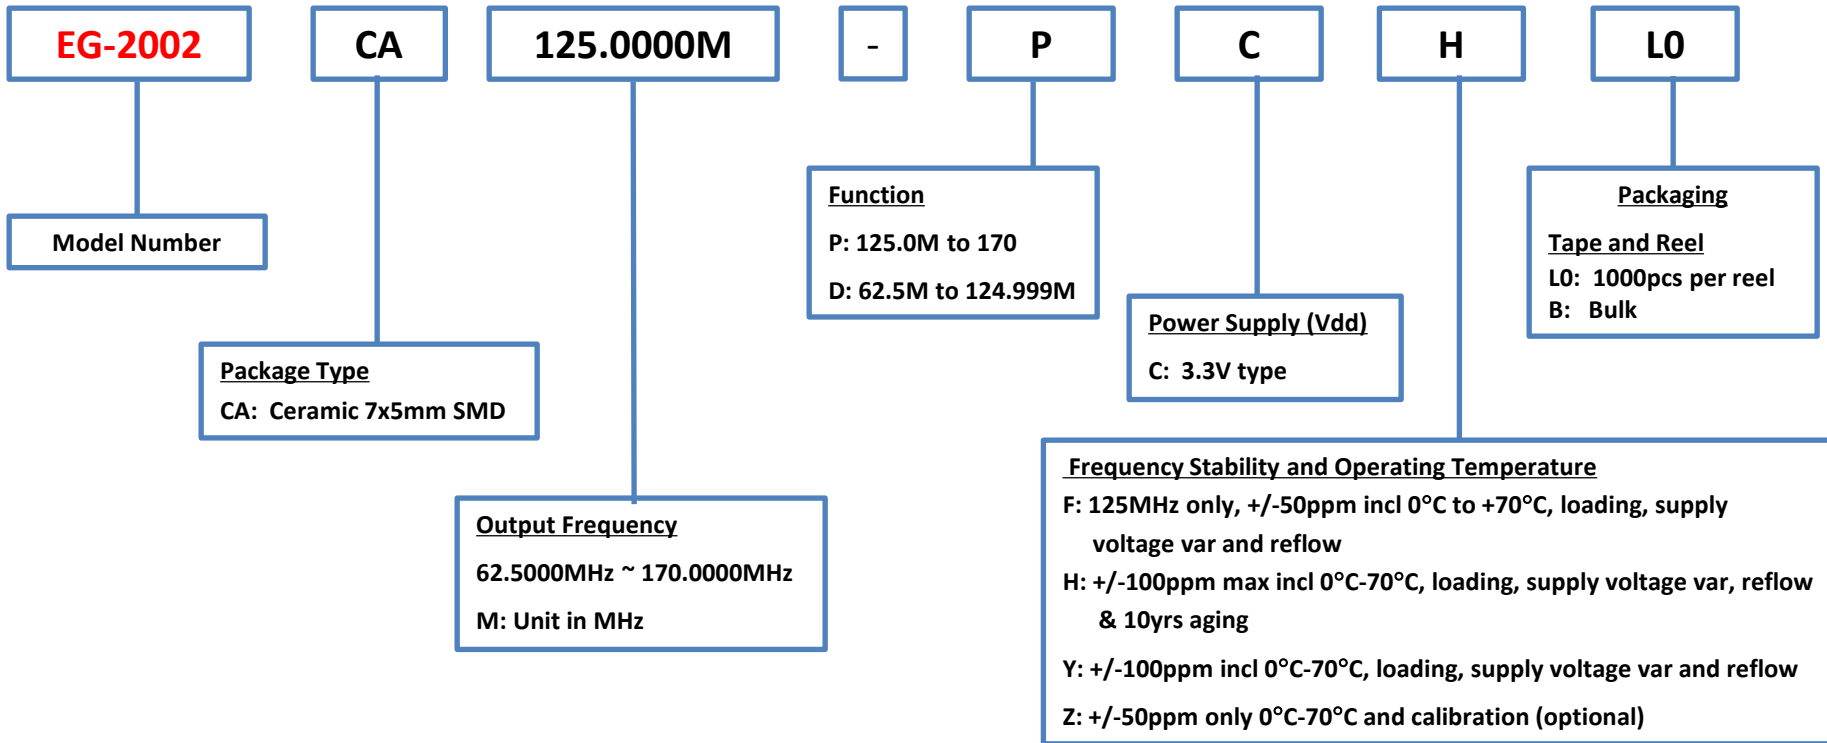

Standard Frequencies

EG-2002 (LVTTL)


EG-2002CA DCx		EG-2002CA PCx	
62.5000	80.5664	125.0000	161.1328
64.0000	83.0000	128.0000	166.0000
66.4063	83.3143	132.8125	166.6286
66.5000	83.3333	133.0000	166.6667
66.6667	83.6658	133.3333	167.3316
67.5000	87.5000	135.0000	
71.5000	90.0000	143.0000	
75.0000	100.0000	150.0000	
77.7600	106.2500	155.5200	
78.1250		156.2500	
79.6875		159.3750	
80.0000		160.0000	

Product Configuration System



Crystal Oscillators – Low Jitter (SAW)


Discontinued

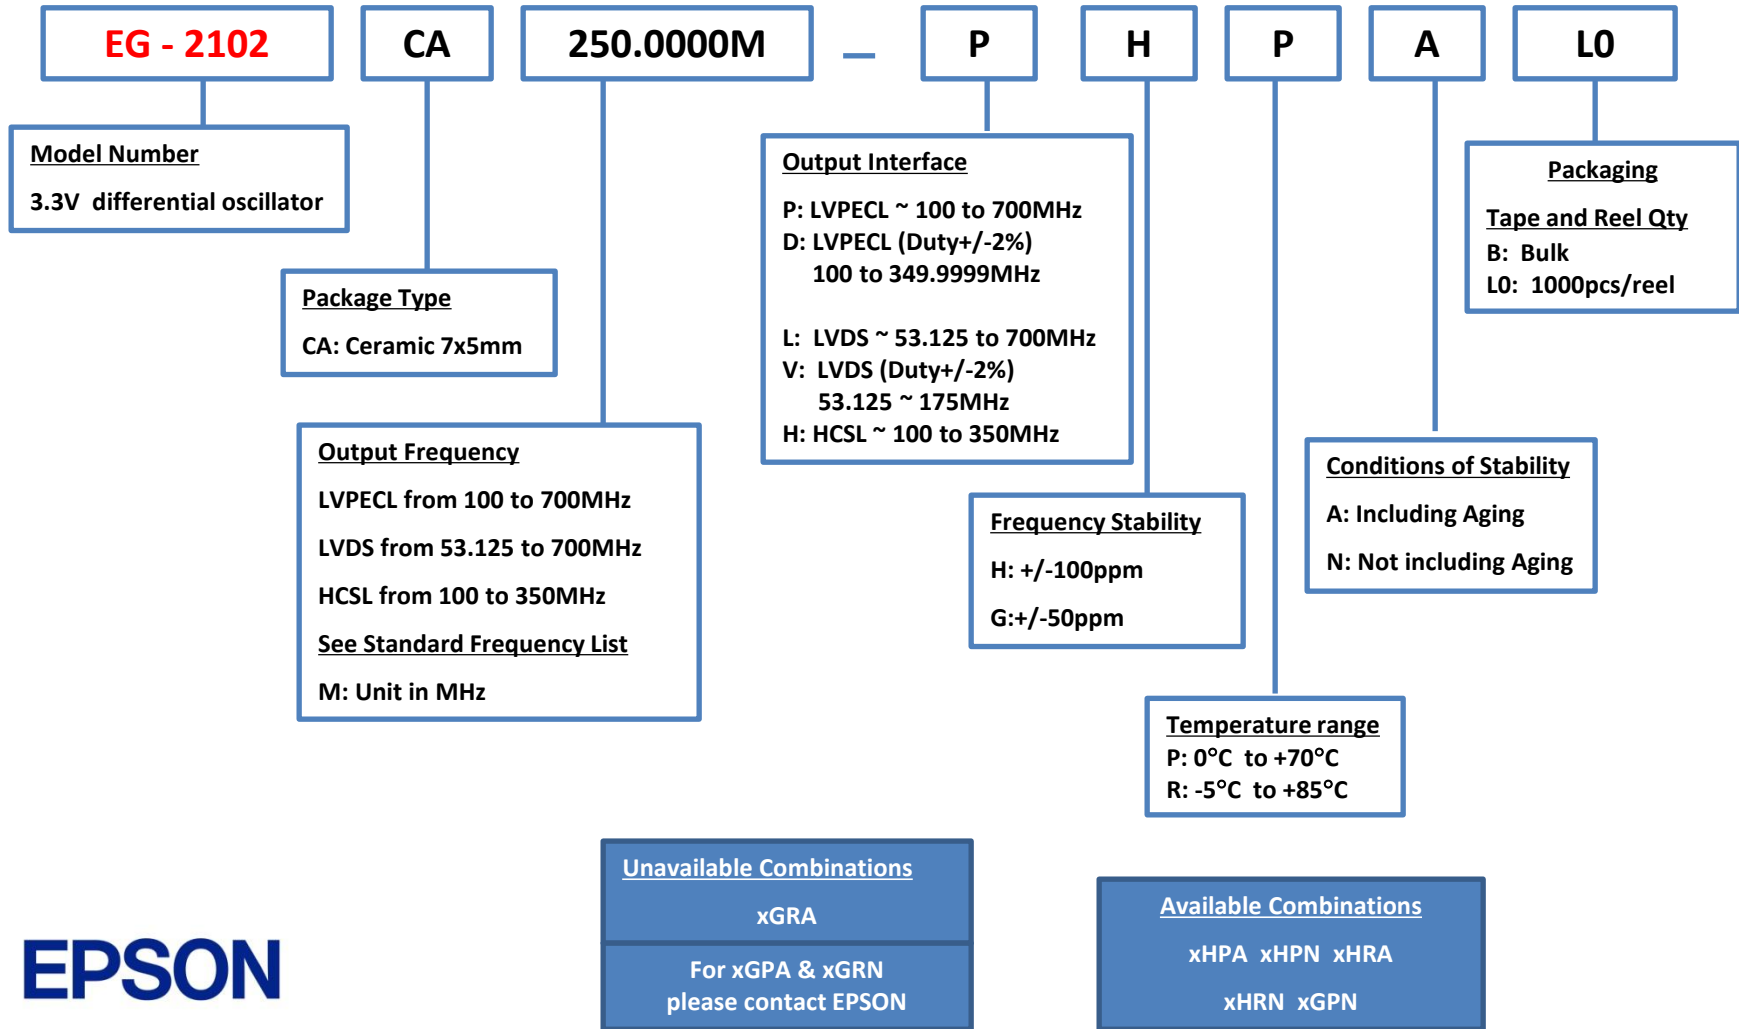

Product Configuration System




Crystal Oscillators – Low Jitter (SAW)

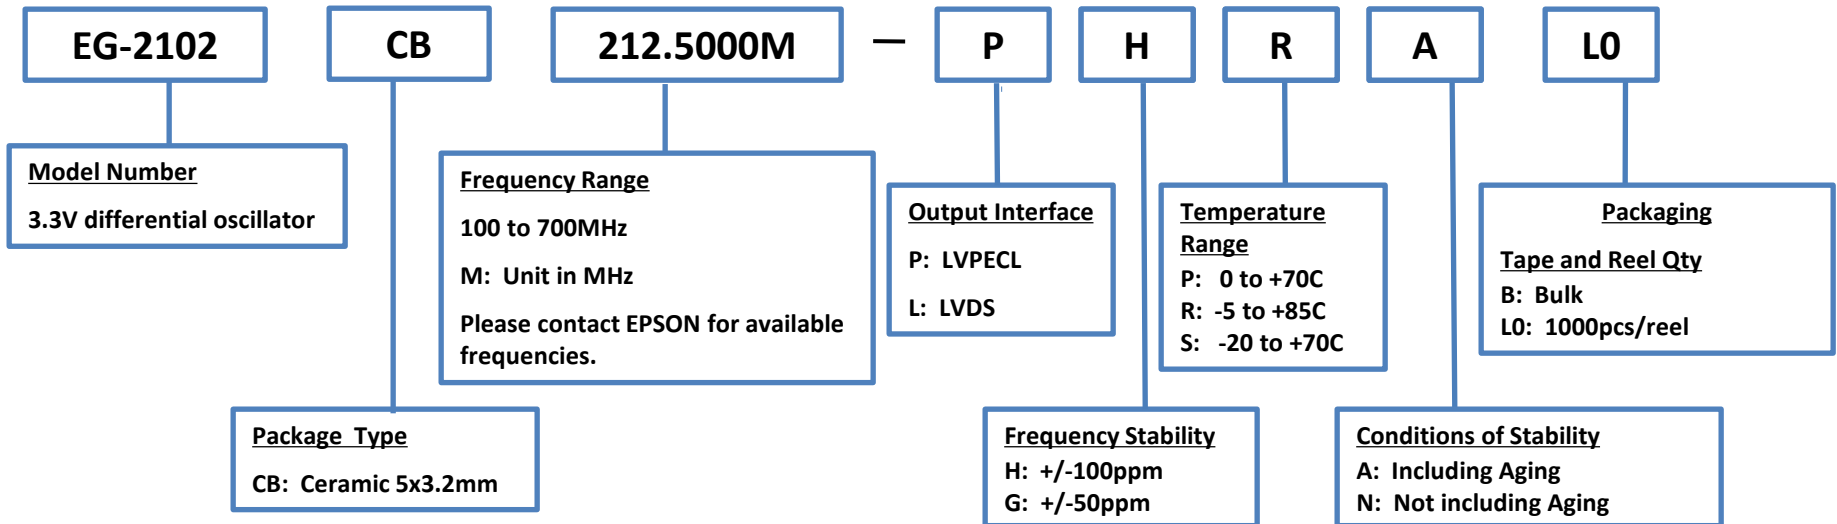

Product Configuration System



Crystal Oscillators – Low Jitter (SAW)

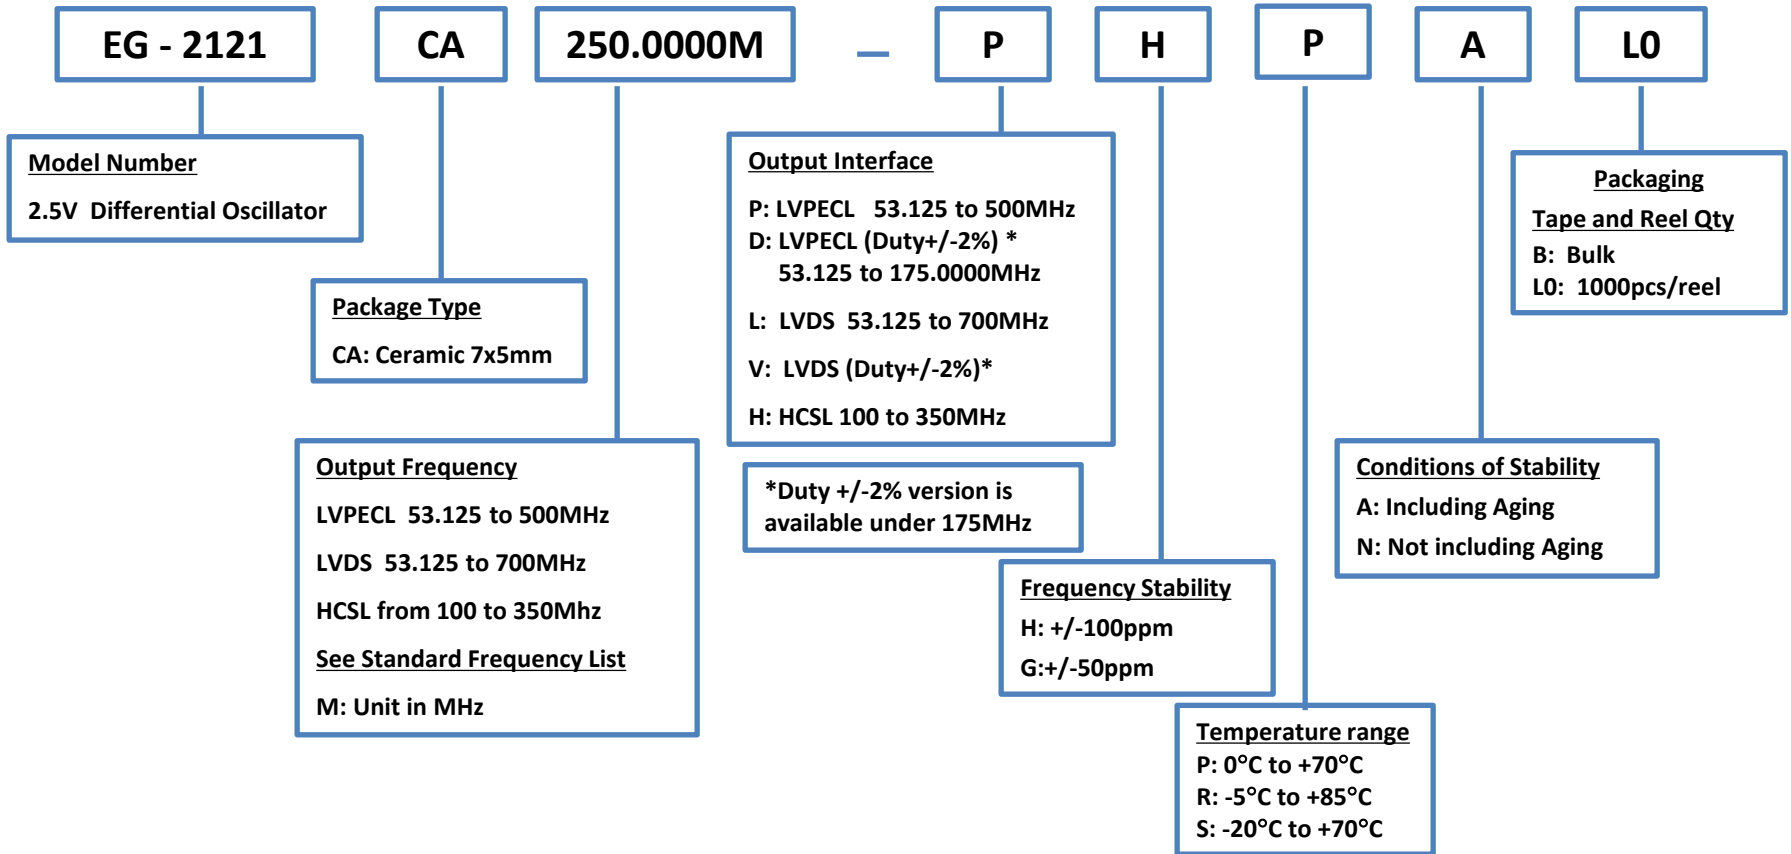

Unavailable Combinations
xGRA
For xGPA & xGRN
please contact EPSON

Available Combinations
xHPA xHPN xHRA
xHRN xGPN



Standard Frequencies

EG-2121 P (LVPECL)

53.1250 *	97.6563	195.3125	390.6250
62.5000 *	98.3040	196.6080	393.2160
66.6667 *	100.0000	200.0000	400.0000
75.0000 *	106.2500	212.5000	425.0000
78.1250 *	124.4160	248.8320	497.6640
79.6875 *	125.0000	250.0000	500.0000
80.0000 *	132.8125	265.6250	
87.5000 *	133.0000	266.0000	
	148.3517	296.7033	
	150.0000	300.0000	
	150.8072	301.6144	
	155.5200	311.0400	
	156.2500	312.5000	
	159.3750	318.7500	
	161.1328	322.2657	
	164.3555	328.7110	
	166.6286	333.2572	
	167.3317	334.6633	
	173.3708	346.7415	
	175.0000	350.0000	
* Frequency only available for xHPA and xHPN			

Standard Frequencies

EG-2121 L (LVDS)

53.1250 *	97.6563	195.3125	390.6250
62.5000 *	98.3040	196.6080	393.2160
66.6667 *	100.0000	200.0000	400.0000
75.0000 *	106.2500	212.5000	425.0000
78.1250 *	124.4160	248.8320	497.6640
79.6875 *	125.0000	250.0000	500.0000
80.0000 *	132.8125	265.6250	531.2500
87.5000 *	133.0000	266.0000	532.0000
	148.3517	296.7033	593.4066
	150.0000	300.0000	600.0000
	150.8072	301.6144	603.2288
	156.2500	312.5000	625.0000
	159.3750	318.7500	637.5000
	161.1328	322.2656	644.5313
	164.3555	328.7109	657.4219
	166.6286	333.2571	666.5143
	167.3316	334.6633	669.3266
	173.3707	346.7415	693.4830
	175.0000	350.0000	700.0000
* Frequency only available for xHPA and xHPN			

Standard Frequencies

EG-2121 (HCSL)

-	195.3125
-	196.6080
100.0000	200.0000
106.2500	212.5000
124.4160	248.8320
125.0000	250.0000
132.8125	265.6250
133.0000	266.0000
148.3517	296.7033
150.0000	300.0000
150.8072	301.6144
155.5200	311.0400
156.2500	312.5000
159.3750	318.7500
161.1328	322.2656
164.3555	328.7109
166.6286	333.2571
167.3316	334.6633
173.3707	346.7415
175.0000	350.0000

Standard Frequencies

EG-2102P (LVPECL)

-	195.3125	390.6250
-	196.6080	393.2160
100.0000	200.0000	400.0000
106.2500	212.5000	425.0000
124.4160	248.8320	497.6640
125.0000	250.0000	500.0000
132.8125	265.6250	531.2500
133.0000	266.0000	532.0000
148.3517	296.7033	593.4066
150.0000	300.0000	600.0000
150.8072	301.6144	603.2288
155.5200	311.0400	622.0800
156.2500	312.5000	625.0000
159.3750	318.7500	637.5000
161.1328	322.2656	644.5313
164.3555	328.7109	657.4219
166.6286	333.2571	666.5143
167.3316	334.6633	669.3266
173.3707	346.7415	693.4830
175.0000	350.0000	700.0000

Standard Frequencies

EG-2102 L (LVDS)

53.1250 *	97.6563	195.3125	390.6250
62.5000 *	98.3040	196.6080	393.2160
66.6667 *	100.0000	200.0000	400.0000
75.0000 *	106.2500	212.5000	425.0000
78.1250 *	124.4160	248.8320	497.6640
79.6875 *	125.0000	250.0000	500.0000
80.0000 *	132.8125	265.6250	531.2500
87.5000 *	133.0000	266.0000	532.0000
	148.3517	296.7033	593.4066
	150.0000	300.0000	600.0000
	150.8072	301.6144	603.2288
	155.5200	311.0400	622.0800
	156.2500	312.5000	625.0000
	159.3750	318.7500	637.5000
	161.1328	322.2656	644.5313
	164.3555	328.7109	657.4219
	166.6286	333.2571	666.5143
	167.3316	334.6633	669.3266
	173.3707	346.7415	693.4830
	175.0000	350.0000	700.0000
* Frequency only available for xHPA and xHPN			

Standard Frequencies

EG-2102P (HCSL)


-	195.3125
-	196.6080
100.0000	200.0000
106.2500	212.5000
124.4160	248.8320
125.0000	250.0000
132.8125	265.6250
133.0000	266.0000
148.3517	296.7033
150.0000	300.0000
150.8072	301.6144
155.5200	311.0400
156.2500	312.5000
159.3750	318.7500
161.1328	322.2656
164.3555	328.7109
166.6286	333.2571
167.3316	334.6633
173.3707	346.7415
175.0000	350.0000



Product Configuration System



Crystal Oscillators – Low Jitter (SAW)

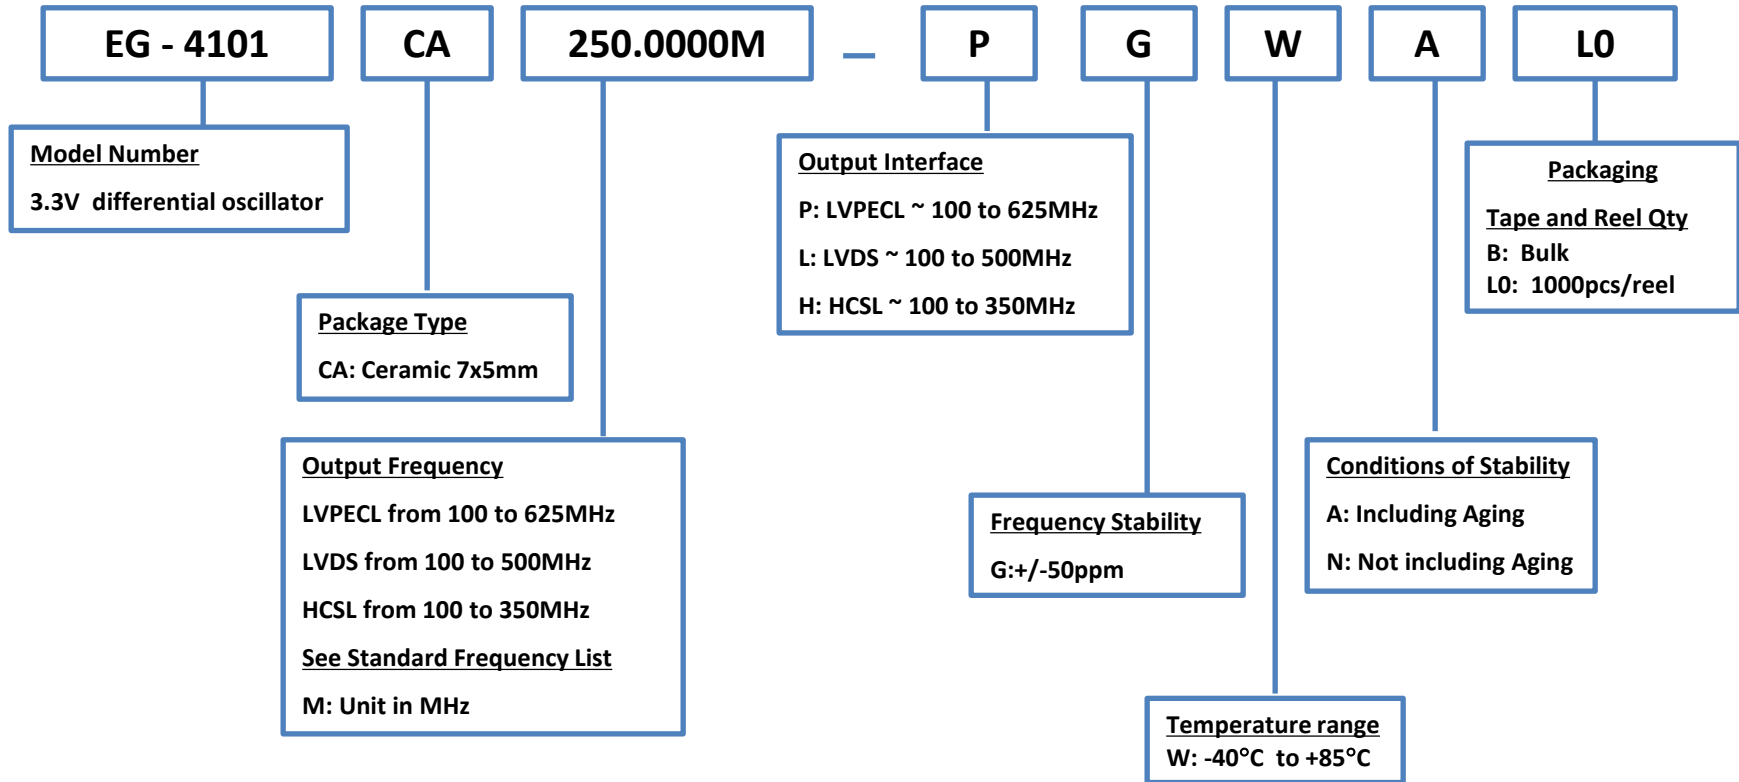

Standard Frequencies

EG-4101 (LVPECL)

100.0000	400.0000	
106.2500	425.0000	
121.1090	484.4360	
133.0000	532.0000	
140.0000	560.0000	
140.6665	562.6660	
156.2500	625.0000	
161.1320		
168.0407		
170.0000		
200.0000		
212.5000		
242.2180		
266.0000		
280.0000		
281.3330		
312.5000		
322.2640		
336.0814		
340.0000		



Standard Frequencies

EG-4101 (LVDS)

100.0000	400.0000	
106.2500	425.0000	
121.1090	484.4360	
133.0000		
140.0000		
140.6665		
156.2500		
161.1320		
168.0407		
170.0000		
200.0000		
212.5000		
242.2180		
266.0000		
280.0000		
281.3330		
312.5000		
322.2640		
336.0814		
340.0000		



Standard Frequencies

EG-4101 (HC SL)


100.0000		
106.2500		
121.1090		
133.0000		
140.0000		
140.6665		
156.2500		
161.1320		
168.0407		
170.0000		
200.0000		
212.5000		
242.2180		
266.0000		
280.0000		
281.3330		
312.5000		
322.2640		
336.0814		
340.0000		



Product Configuration System



Crystal Oscillators – Low Jitter (SAW)

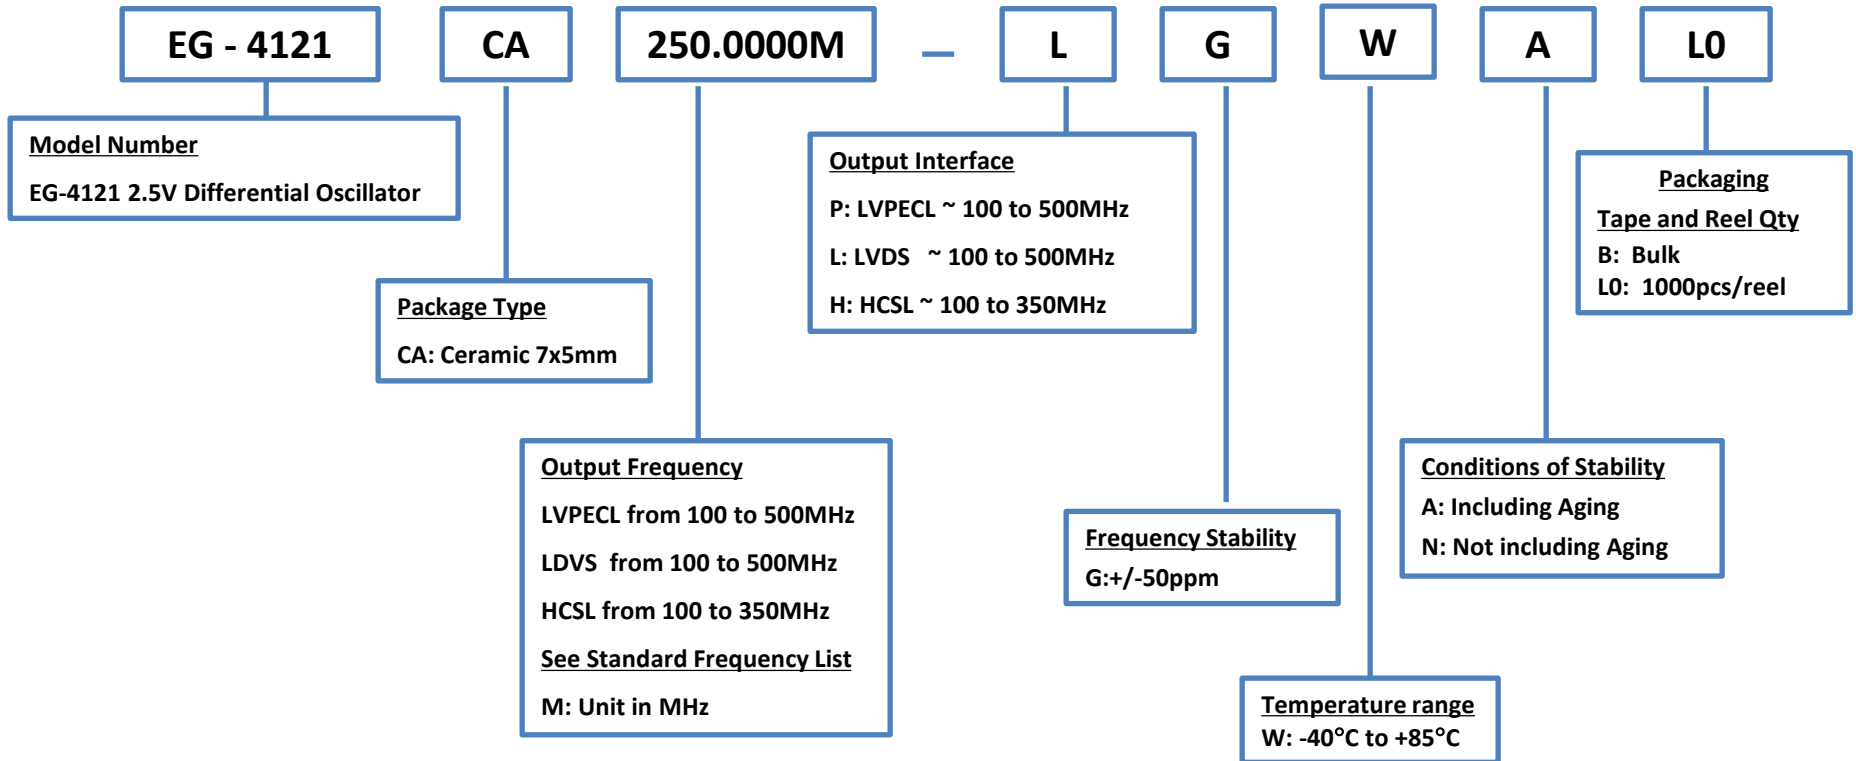

Standard Frequencies

EG-4101 (LVPECL)

100.0000	400.0000	
106.2500	425.0000	
121.1090	484.4360	
133.0000		
140.0000		
140.6665		
156.2500		
161.1320		
168.0407		
170.0000		
200.0000		
212.5000		
242.2180		
266.0000		
280.0000		
281.3330		
312.5000		
322.2640		
336.0814		
340.0000		



Standard Frequencies

EG-4101 (LVDS)

100.0000	400.0000	
106.2500	425.0000	
121.1090	484.4360	
133.0000		
140.0000		
140.6665		
156.2500		
161.1320		
168.0407		
170.0000		
200.0000		
212.5000		
242.2180		
266.0000		
280.0000		
281.3330		
312.5000		
322.2640		
336.0814		
340.0000		



Standard Frequencies

EG-4101 (HCSL)

100.0000		
106.2500		
121.1090		
133.0000		
140.0000		
140.6665		
156.2500		
161.1320		
168.0407		
170.0000		
200.0000		
212.5000		
242.2180		
266.0000		
280.0000		
281.3330		
312.5000		
322.2640		
336.0814		
340.0000		



High-Frequency Applications for SAW Oscillators

- 75.000M Serial ATA/SAS
- 98.304M 1394b
- 100.000M PCI-Express, Serial ATA
- 106.250M Fibre Channel
- 125.000M 1GbEthernet; iSCSI, Infiniband, Hypertransport, PCI-express
- 133.000M Bus/Mem Clock, CPU
- 133.333M FB DIMM
- 150.000M Serial ATA, Serial SCSI
- 155.520M SONET OC-48
- 156.250M 10GbEthernet XAUI
- 159.375M 10GbFibre Channel XAUI
- 161.132M 10GbEthernet SERDES
- 164.355M 10GbFibre Channel SERDES
- 166.000M Bus/Mem Clock
- 200.000M Bus/Mem Clock
- 212.500M 4G Fibre Channel, 8Gb Fibre Channel, FCoE
- 250.000M Infiniband, High Speed Bus
- 312.500M 10GbE
- 500.000M High Speed Bus
- 622.080M SONET OC-192
- 625.000M 10GbEthernet XAUI, High Speed Bus
- 644.531M 10GbEthernet SERDES
- 669.326M SONET OC-192 Digital Wrapper

High Frequency Oscillator Applications


XO / SO (MHz)			VCXO / VCXO (MHz)		
Fibre Channel	FC-2	106.2	SONET	OC-3/12	19.44*
	FC-4/-8	212.5 / 425		OC-3/12	38.88*
	FC-10	159.375			
Ethernet	GigE	125		OC-3/12/48	77.76*
	10 GigE/Infiniband	125 / 250			
	XAUI	156.25			
	XAUI2	312.5			
	10 GigE PHY	161.1328			
		322.2656			
PCI-Express	Phase 1	100		OC-6	311.04*
	Phase 2	200			
	Phase 3	400			
Storage	SATA 1	75 / 150	OC-12	622.08	
	SATA 2	150 / 300			
	SAS 1	75 / 150			
	SAS 2	150 / 300			
Computer	Bus / Mem Clock	100 / 125 / 133.33 /	OC-48	2488.32	
		166.66			
		200 / 266.67			

* XO / SO also

Product Configuration System




Crystal Oscillators – Low Jitter (SAW)

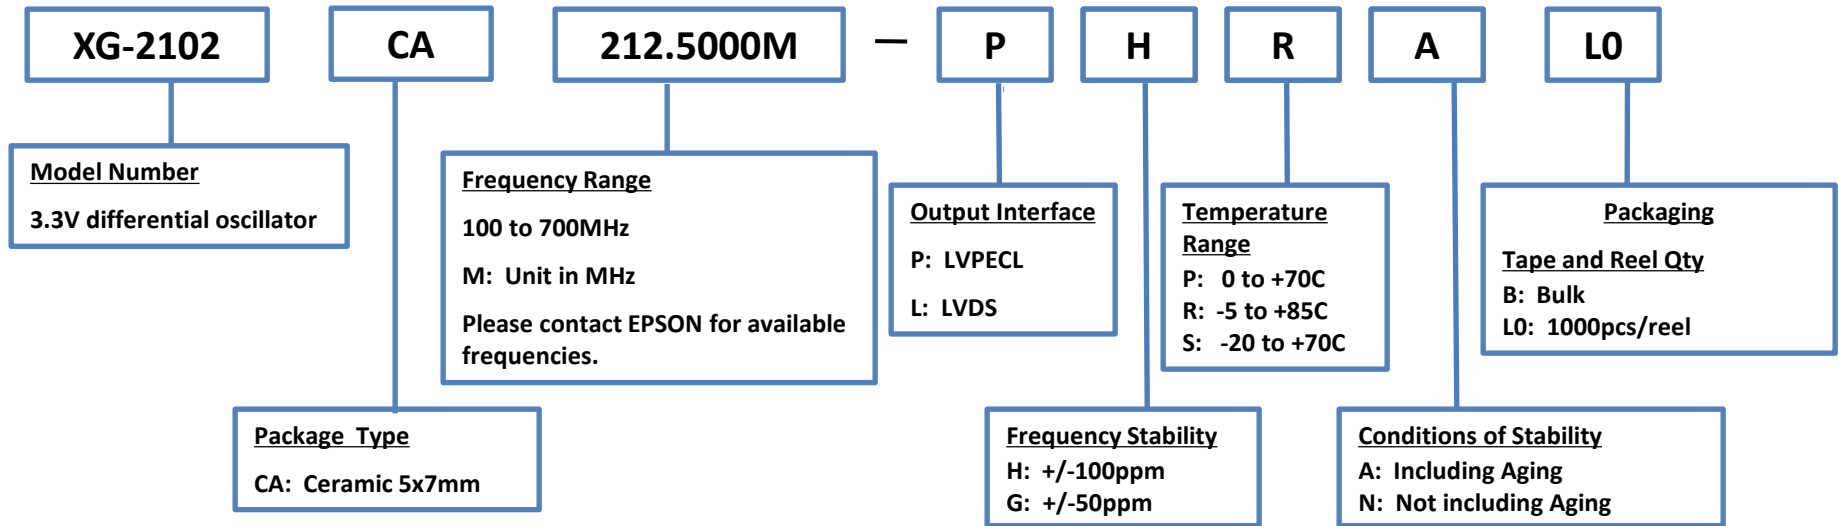

Product Configuration System




Crystal Oscillators – Low Jitter (SAW)

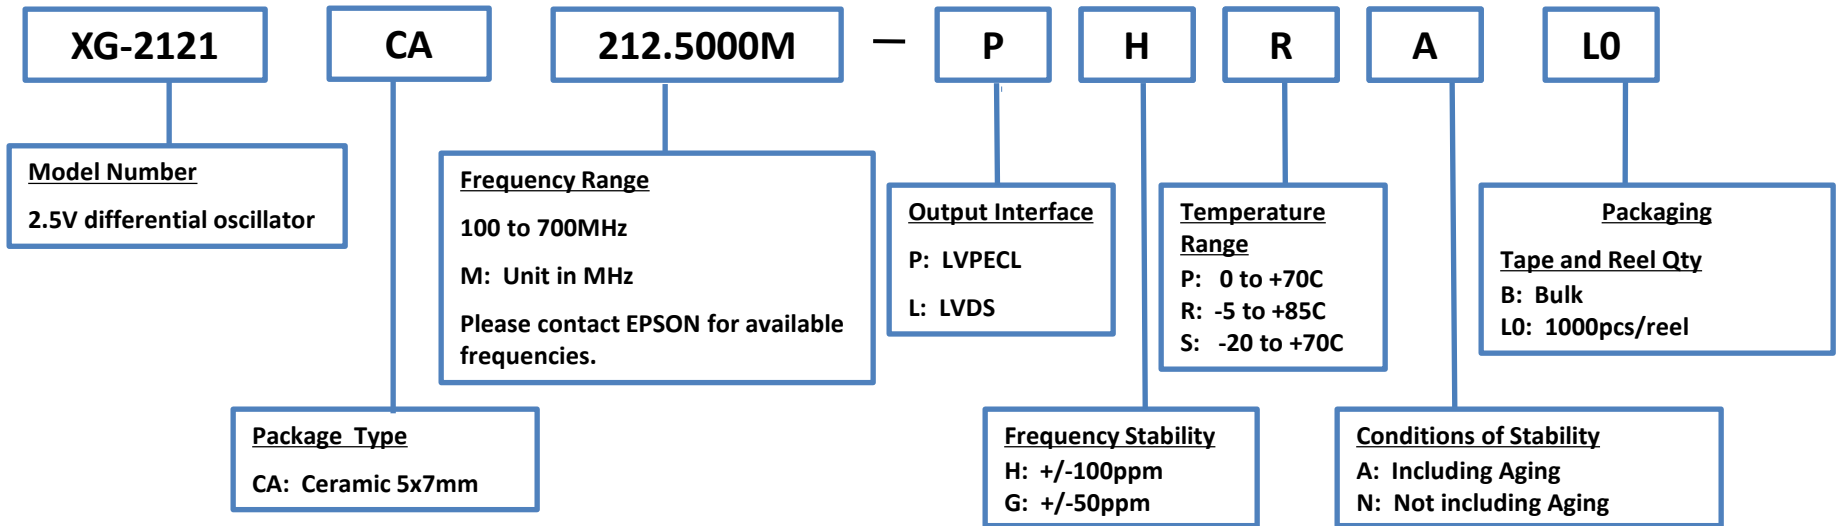

Product Configuration System



Low-Jitter SAW Oscillator (SPSO)

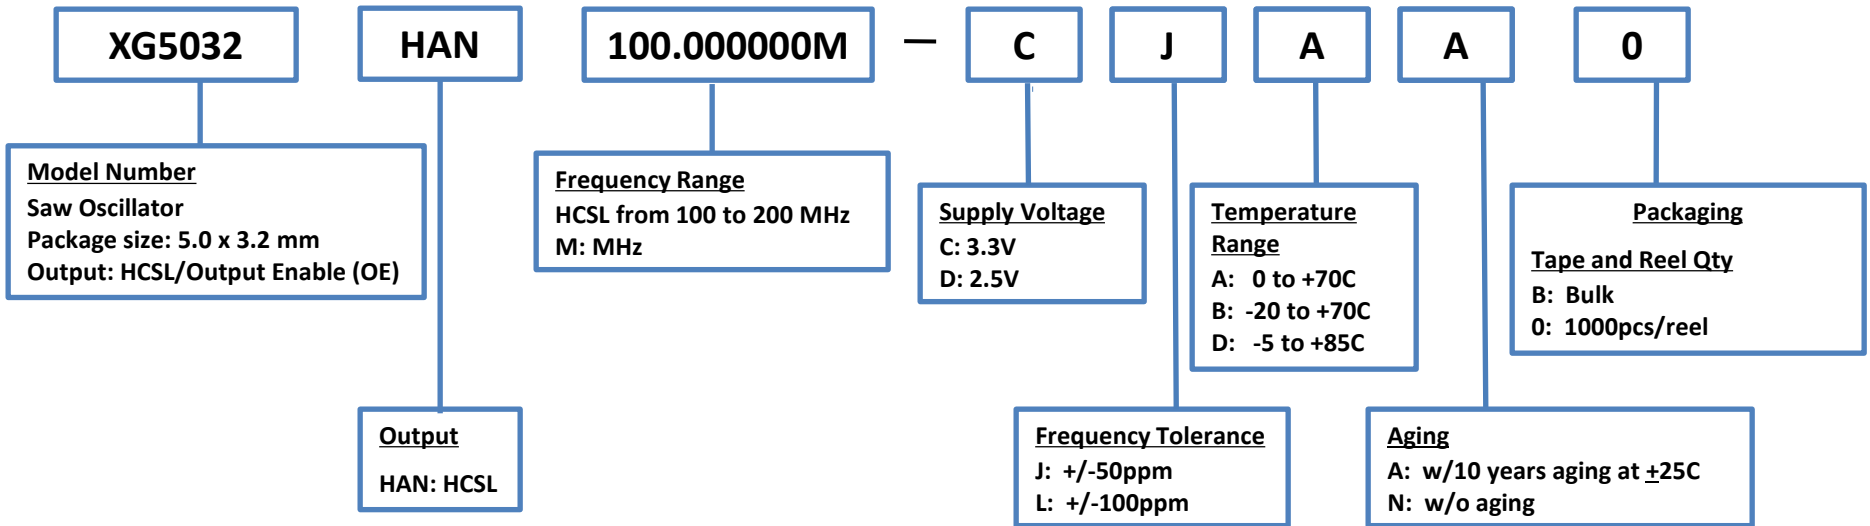

Unavailable Combinations
JDA and JBA

Product Configuration Guide

Programmable Oscillators



EPSON


August 2024

140

Product Configuration System




Crystal Oscillator (SPXO) – Programmable

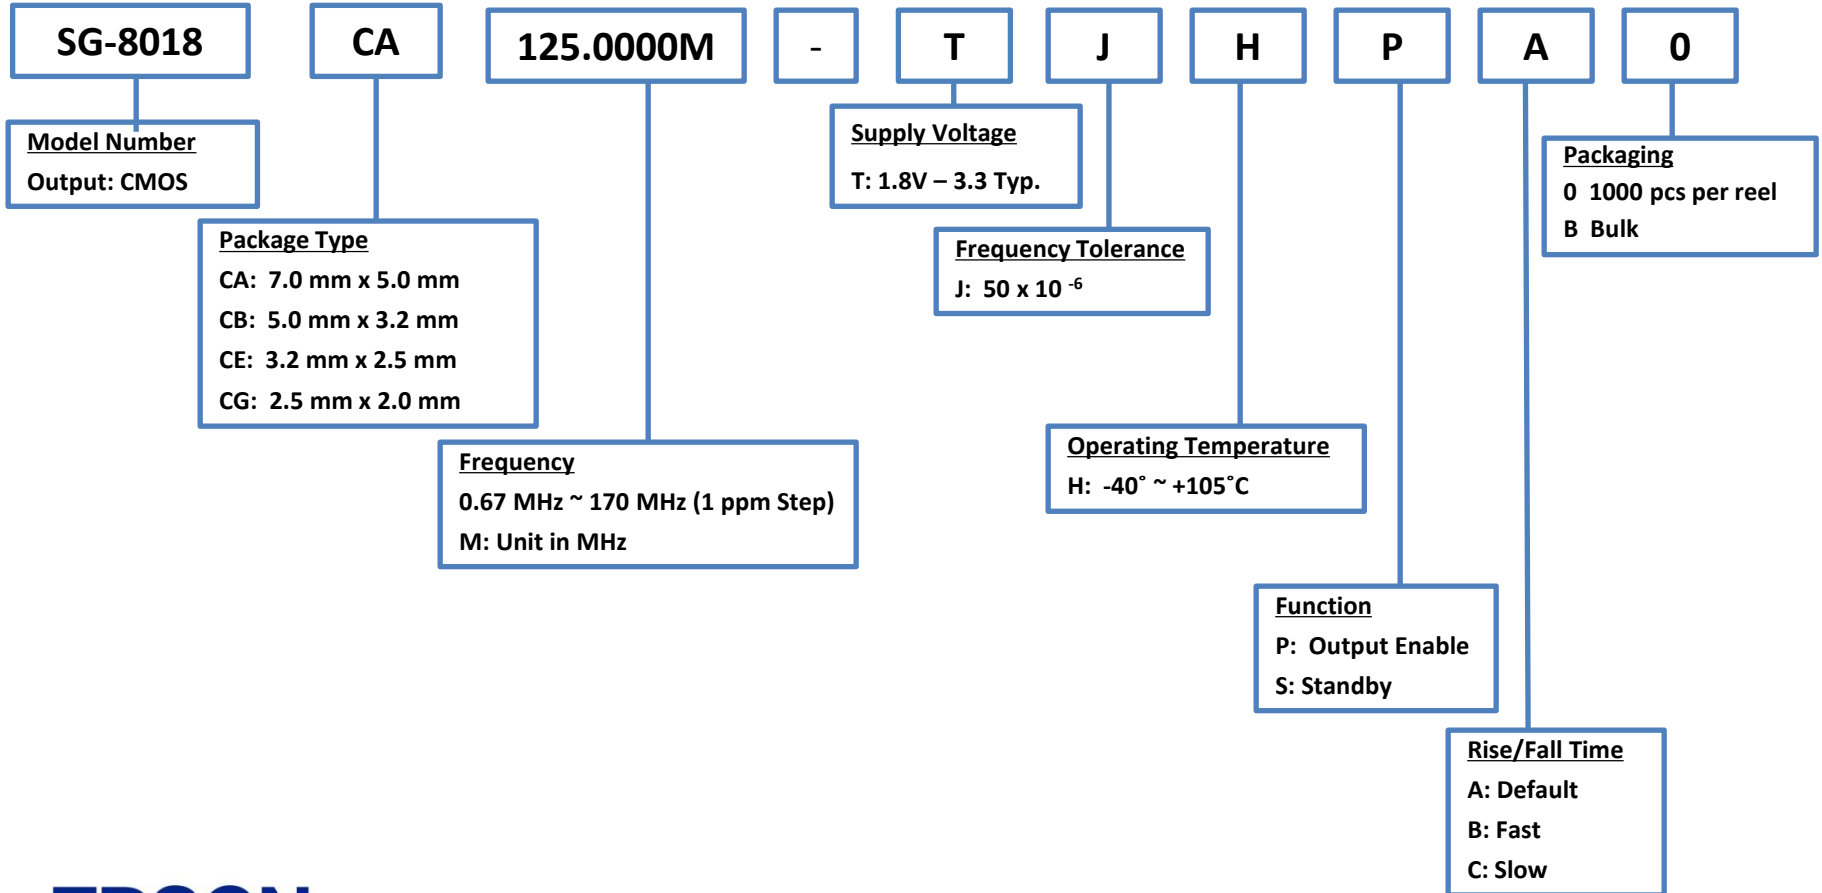

Product Configuration System



Crystal Oscillator (SPXO) – Programmable, High Performance

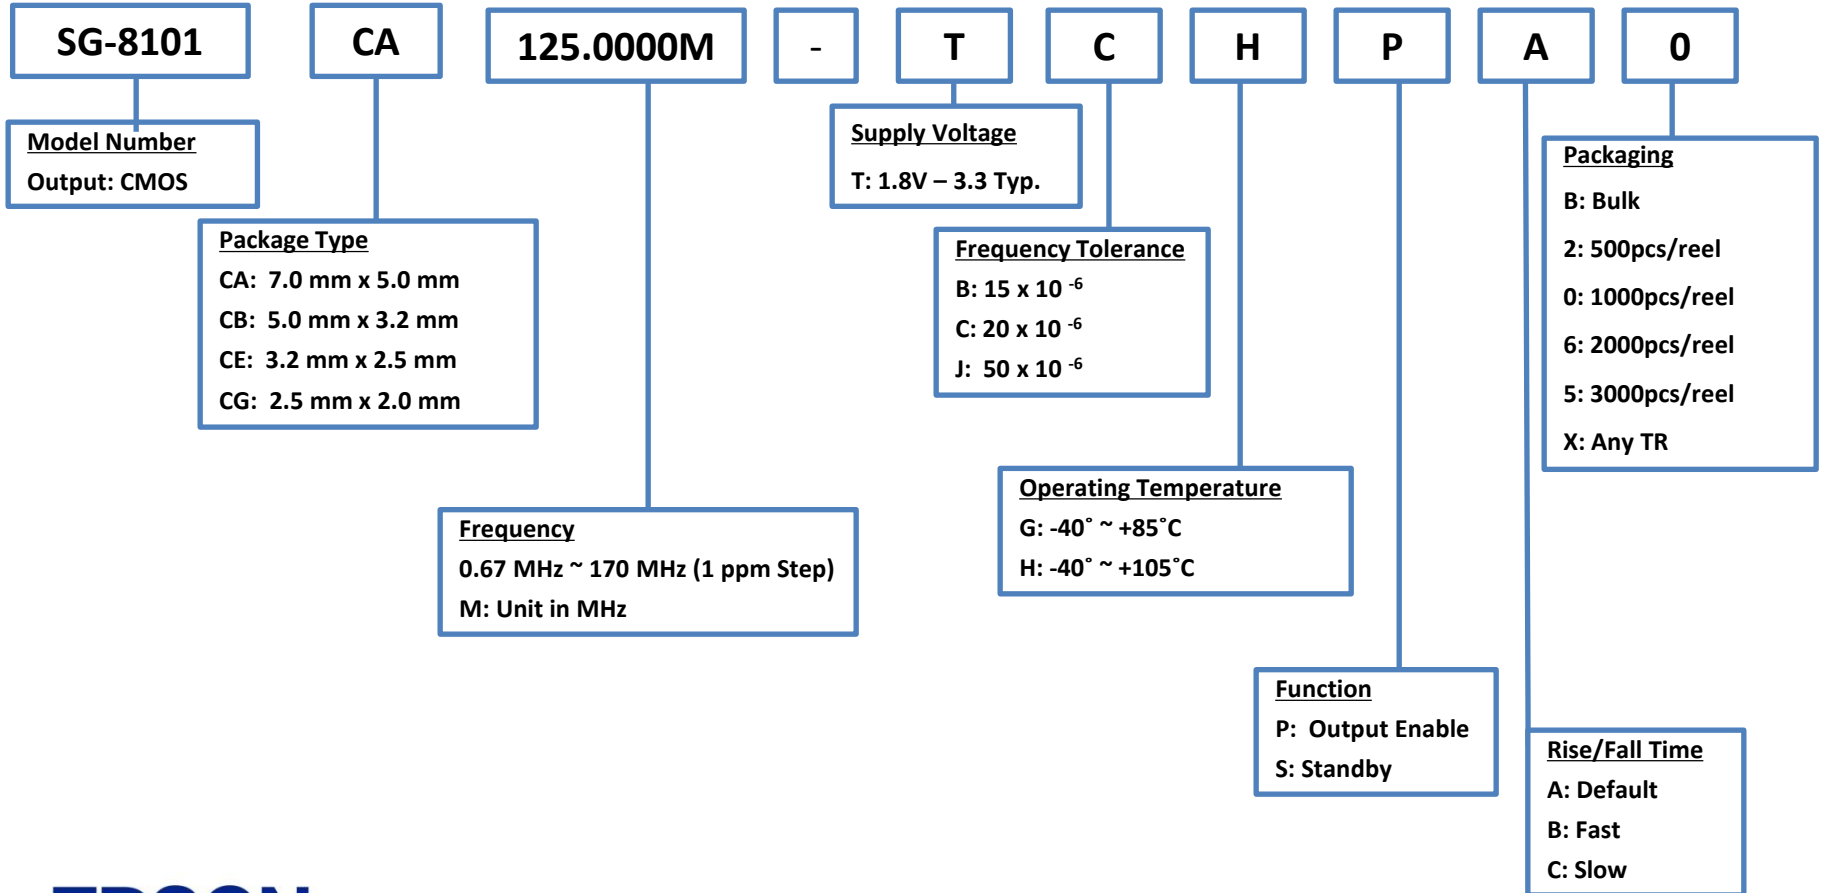

NOTE:
See next page for available combinations



Product Configuration System



Crystal Oscillator (SPXO) – Programmable, High Performance


SG-8101 Available Combinations

Available combination		CA: 7.0 mm x 5.0 mm			CB: 5.0 mm x 3.2 mm			CE: 3.2 mm x 2.5 mm			CG: 2.5 mm x 2.0 mm		
Frequency tolerance		B: 15 x 10 ⁻⁶	C: 20 x 10 ⁻⁶	J: 50 x 10 ⁻⁶	B: 15 x 10 ⁻⁶	C: 20 x 10 ⁻⁶	J: 50 x 10 ⁻⁶	B: 15 x 10 ⁻⁶	C: 20 x 10 ⁻⁶	J: 50 x 10 ⁻⁶	B: 15 x 10 ⁻⁶	C: 20 x 10 ⁻⁶	J: 50 x 10 ⁻⁶
Operating temperature	G: -40 °C ~ +85 °C	✓			✓			✓			✓		
	H: -40 °C ~ +105 °C		✓	✓		✓	✓		✓	✓		✓	✓

Product Configuration System



Crystal Oscillator (SPXO) – Programmable, High Performance, Automotive (AECQ100)

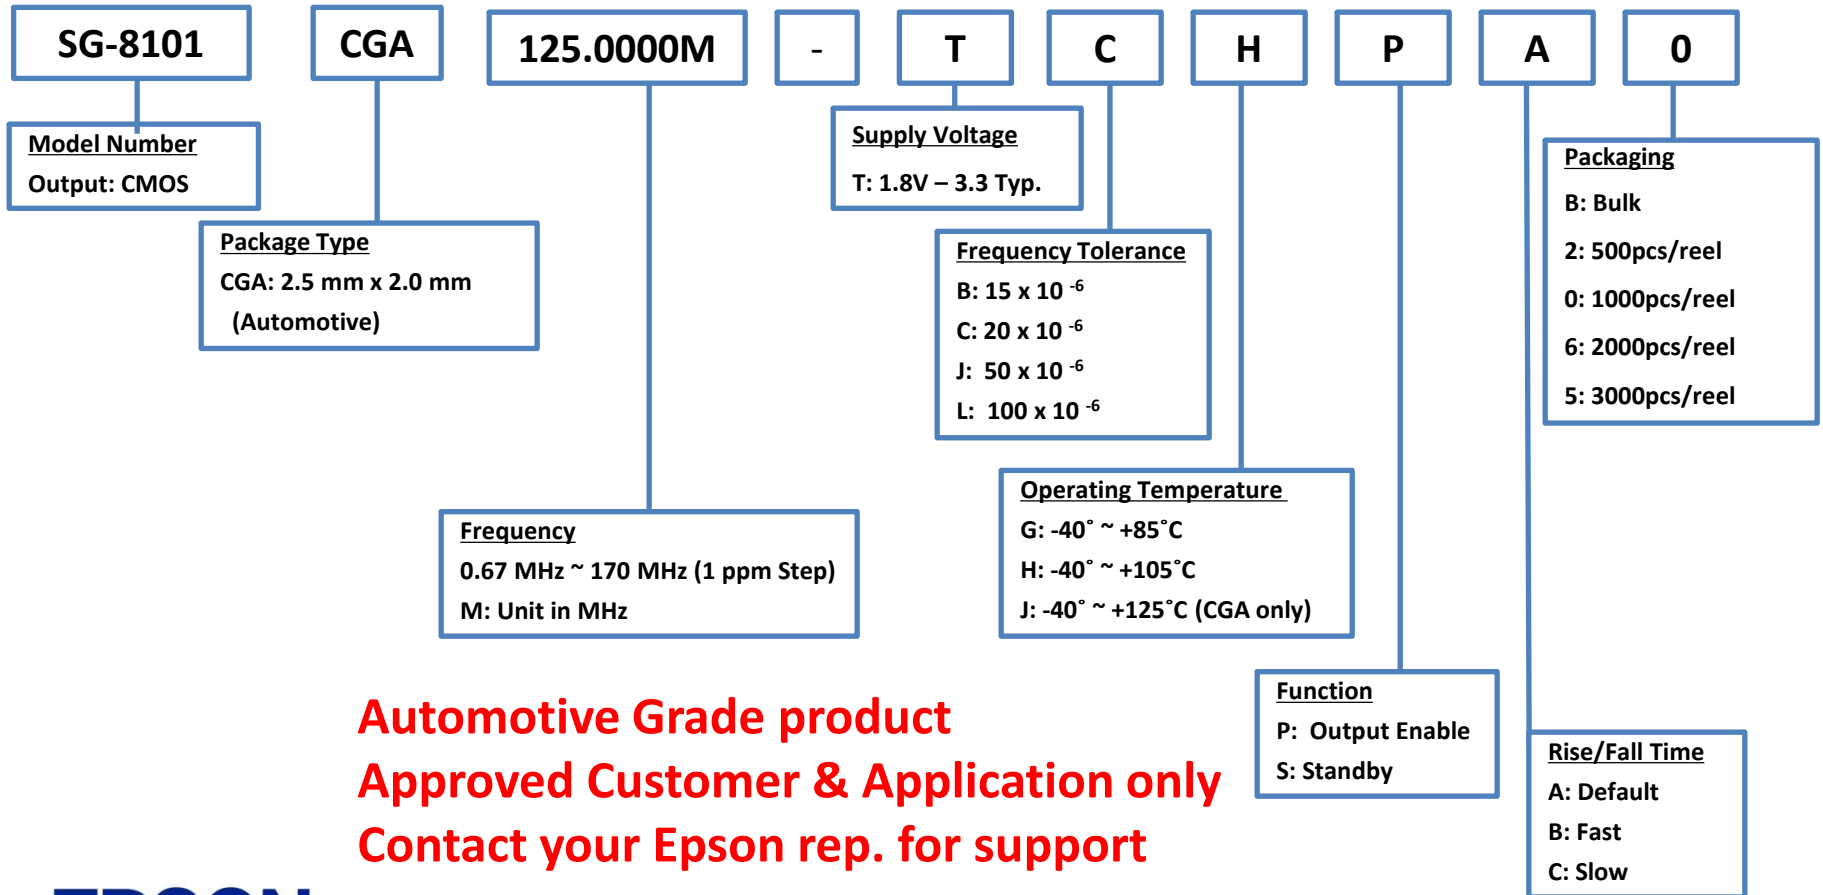

Automotive Grade product
Approved Customer & Application only
Contact your Epson rep. for support

EPSON

August 2024


NOTE:

For Automotive SG-8101CGA, stability “JJ” (+/-50ppm -40/125C) and “LJ” (+/-100ppm -40/125C) are available. See previous slide for other possible combination.

Product Configuration System



Crystal Oscillators - Programmable

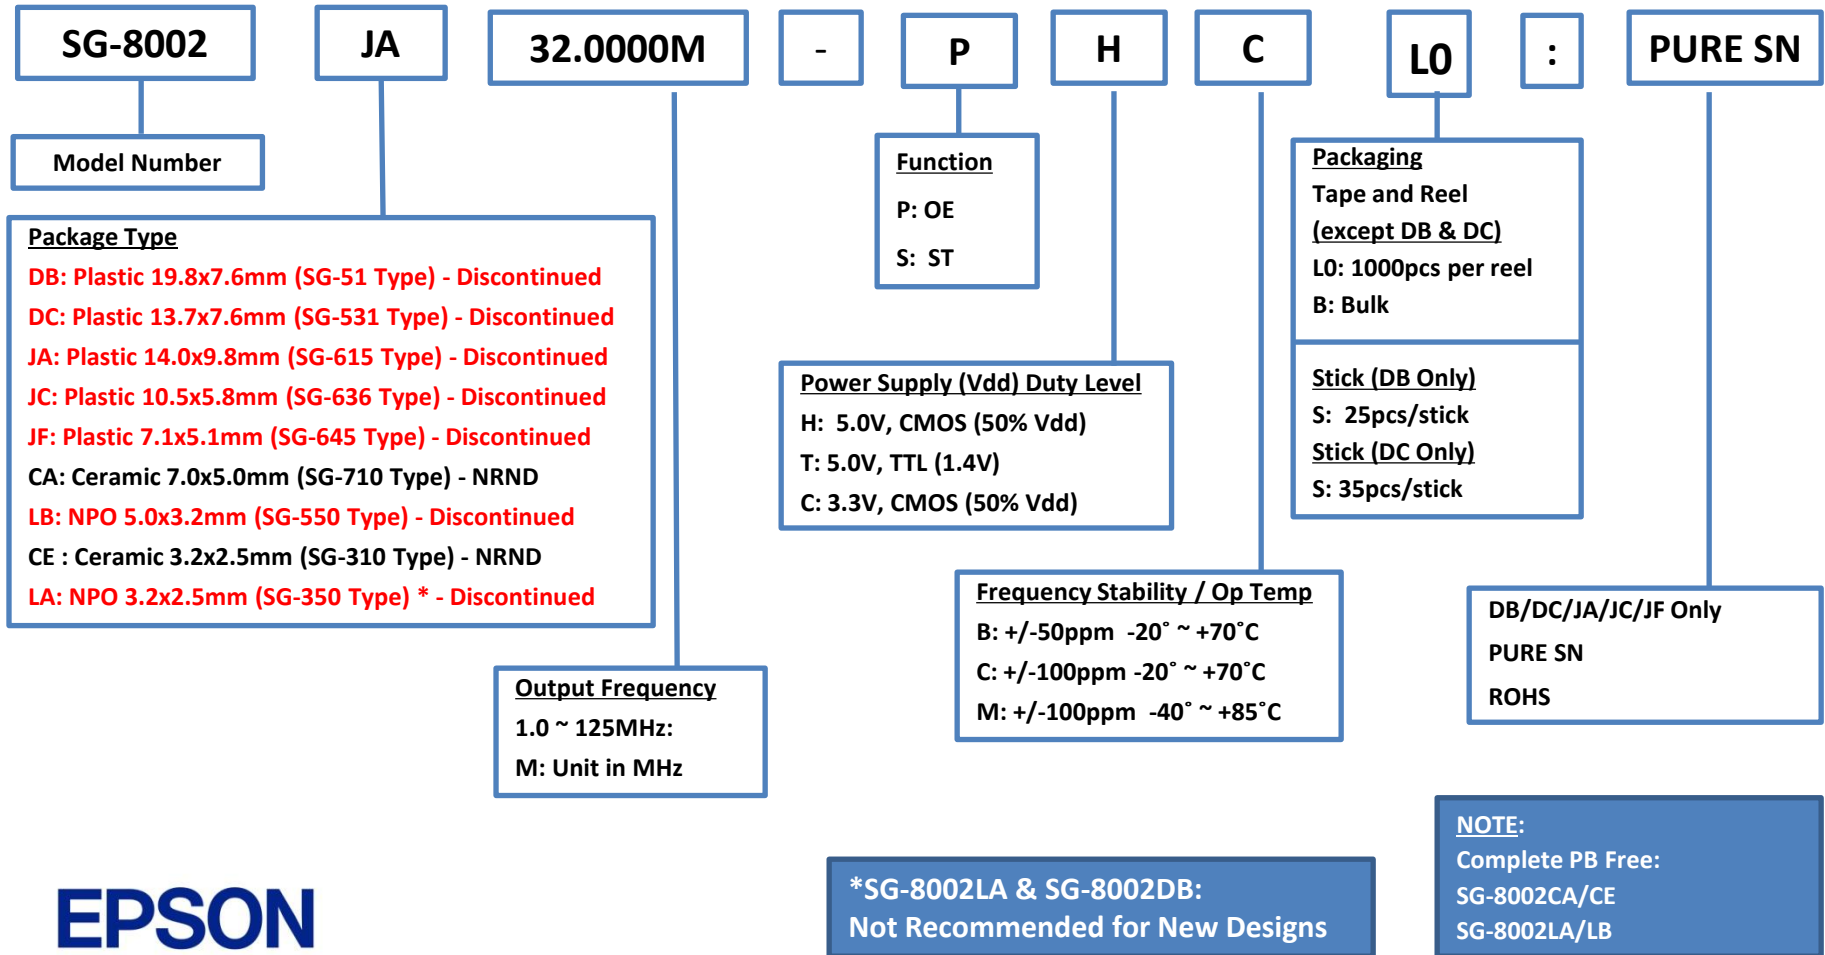


Product Configuration System



Crystal Oscillators - Programmable


Discontinued

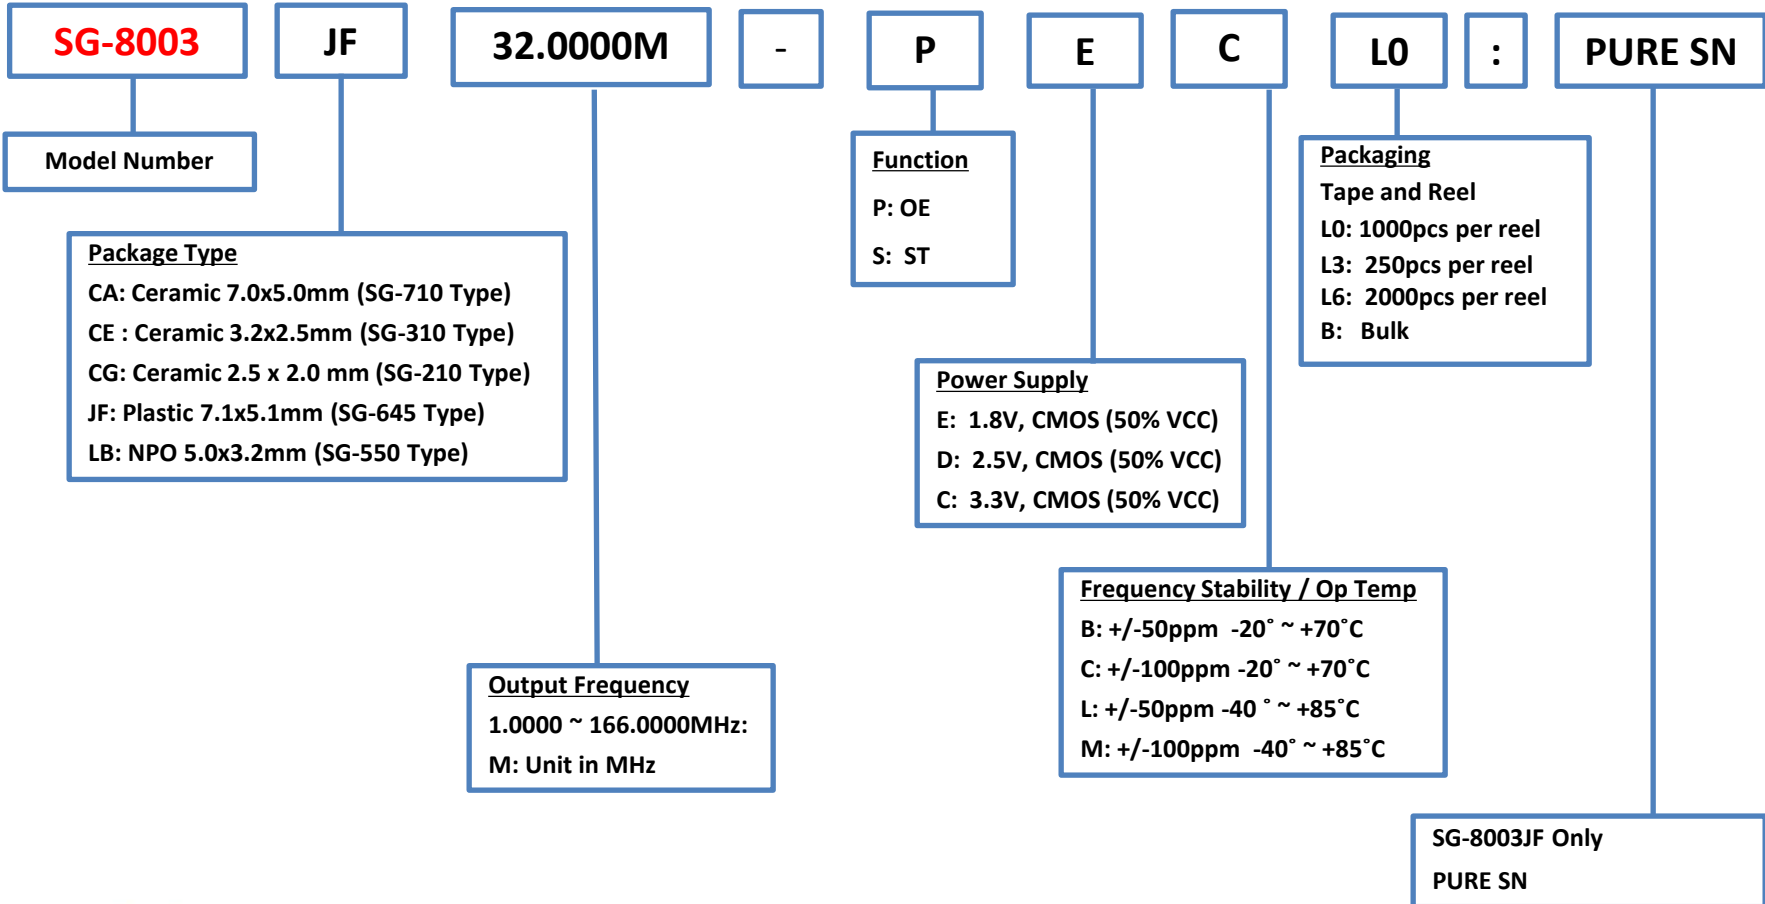

Product Configuration System




Dual Selectable Crystal Oscillator (SPXO) Programmable (Dual Frequencies Available)

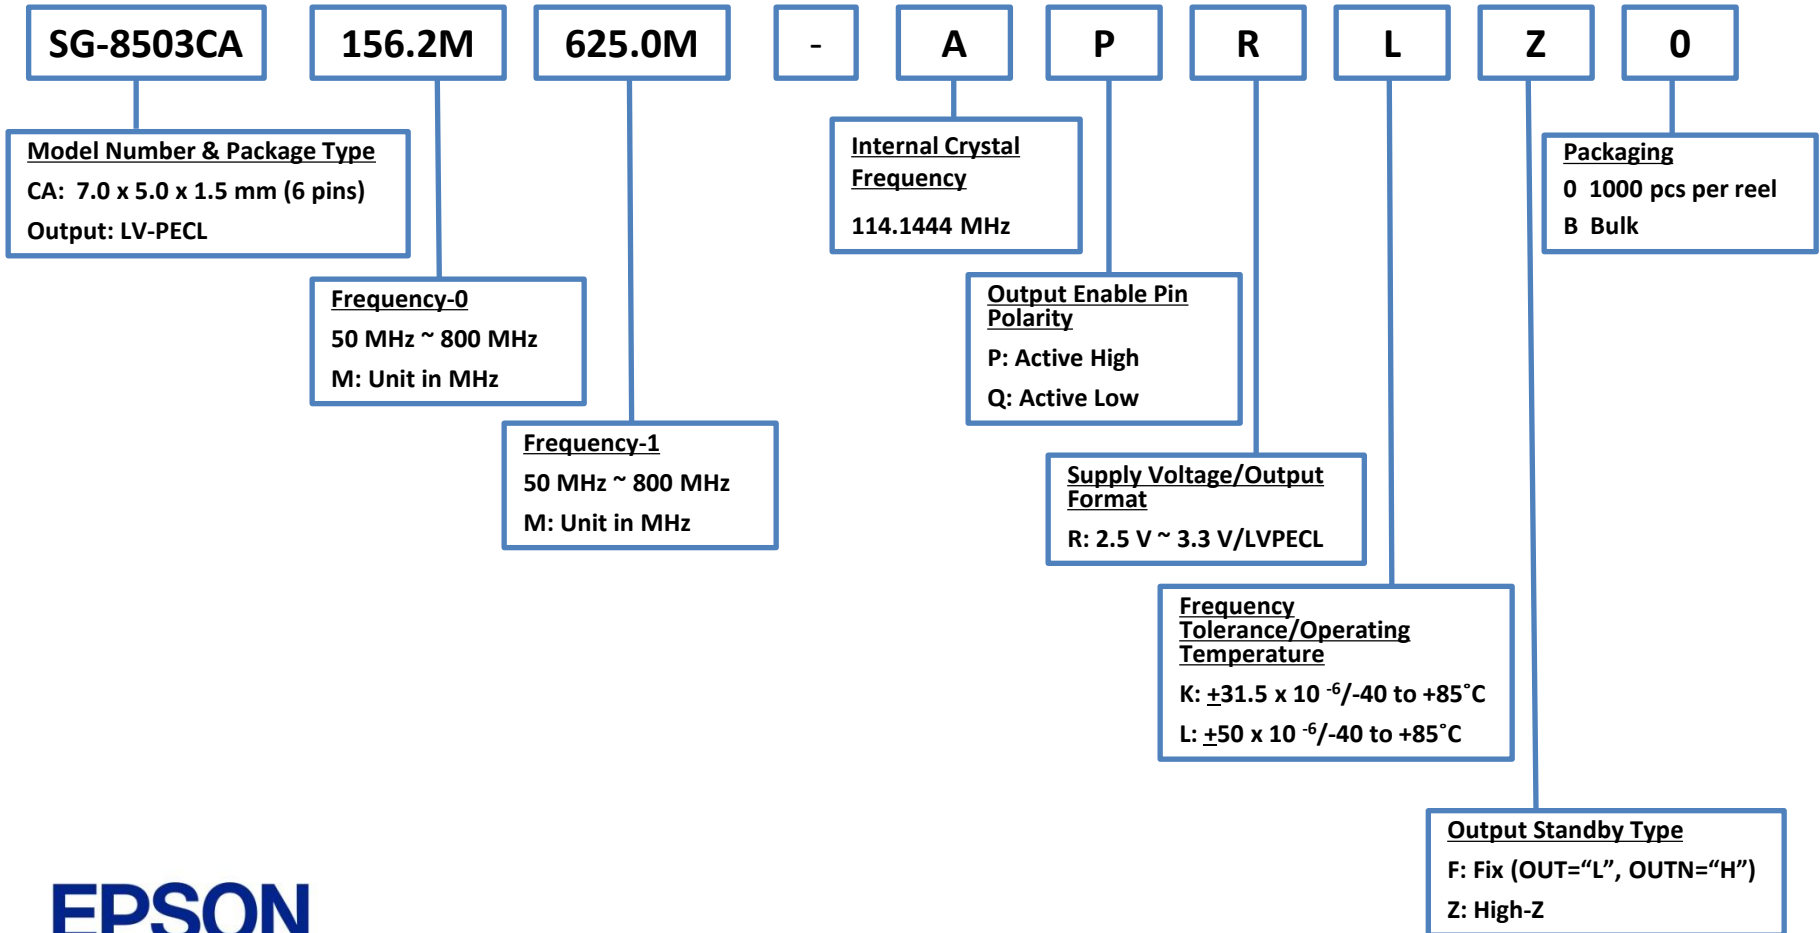

Product Configuration System



Quad Selectable Crystal Oscillator (SPXO) Programmable (Quad Frequencies Available)

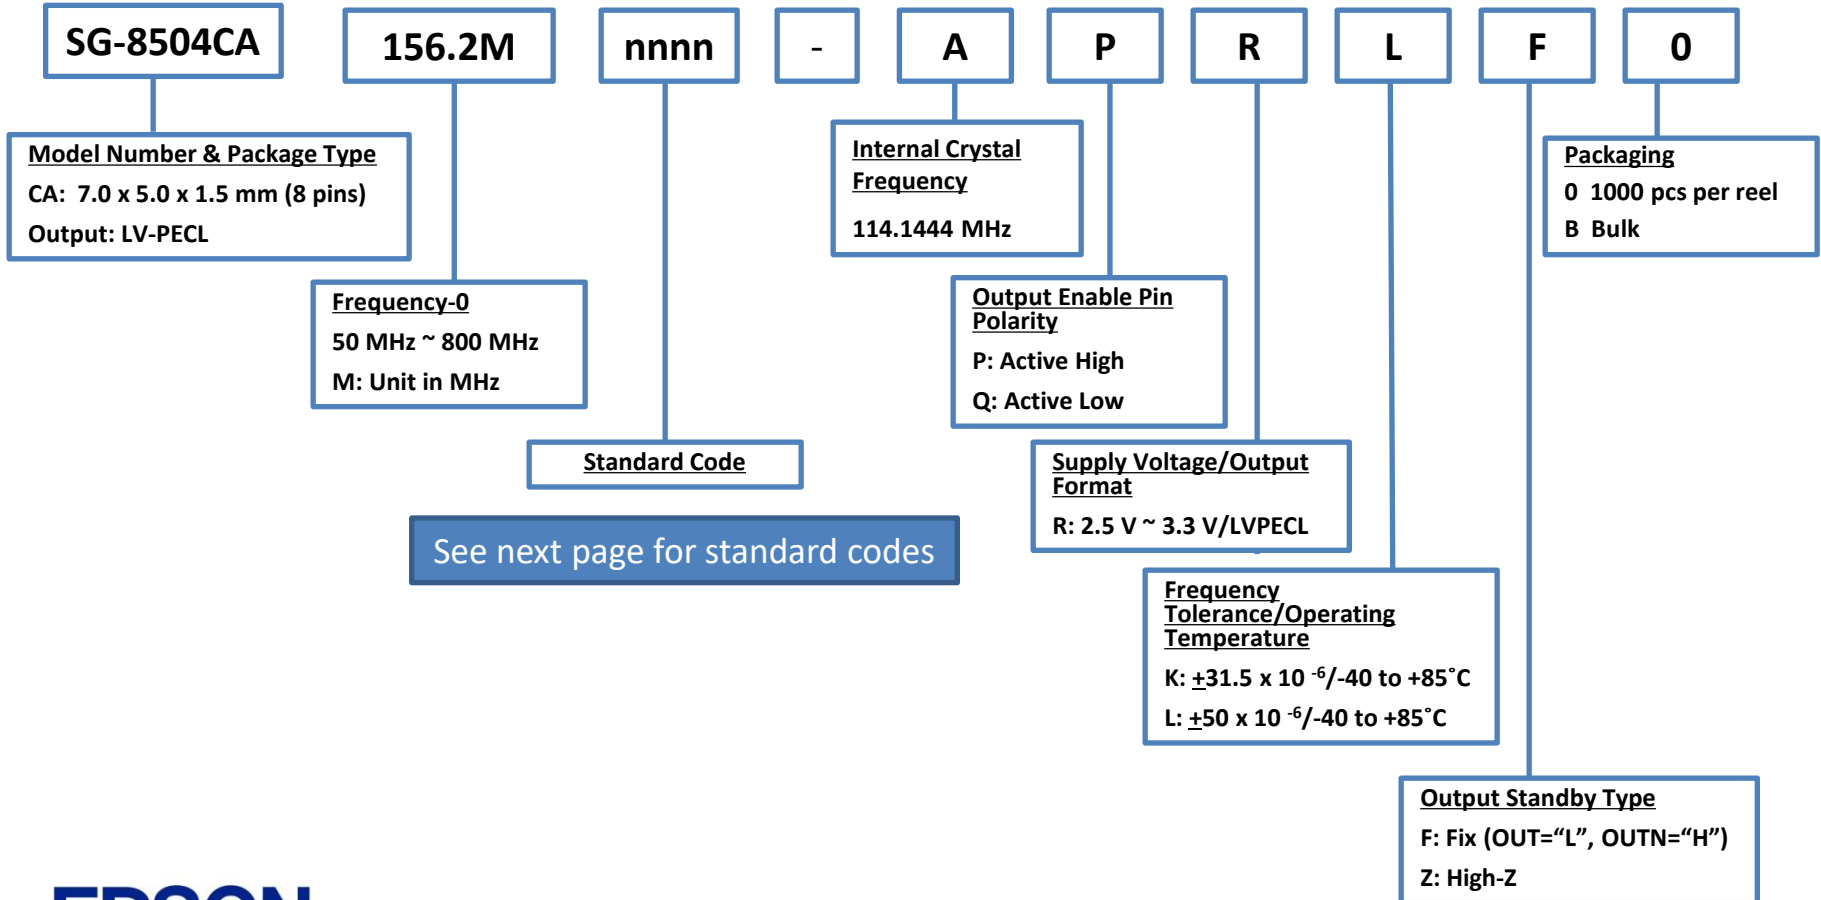

Product Configuration System



Quad Selectable Crystal Oscillator (SPXO)
Programmable (Quad Frequencies Available)


SG-8504 Standard Codes

Standard Code (‘nnnn’)	Frequency 0	Frequency 1	Frequency 2	Frequency 3
0007	75.00000	100.00000	150.00000	250.00000
0008	62.50000	125.00000	156.25000	250.00000
0009	106.25000	159.37500	212.50000	425.00000
0010	100.00000	133.33333	166.66666	200.00000
0011	100.00000	125.00000	156.25000	312.50000

Product Configuration System



User Programmable I²C Crystal Oscillator (SPXO)

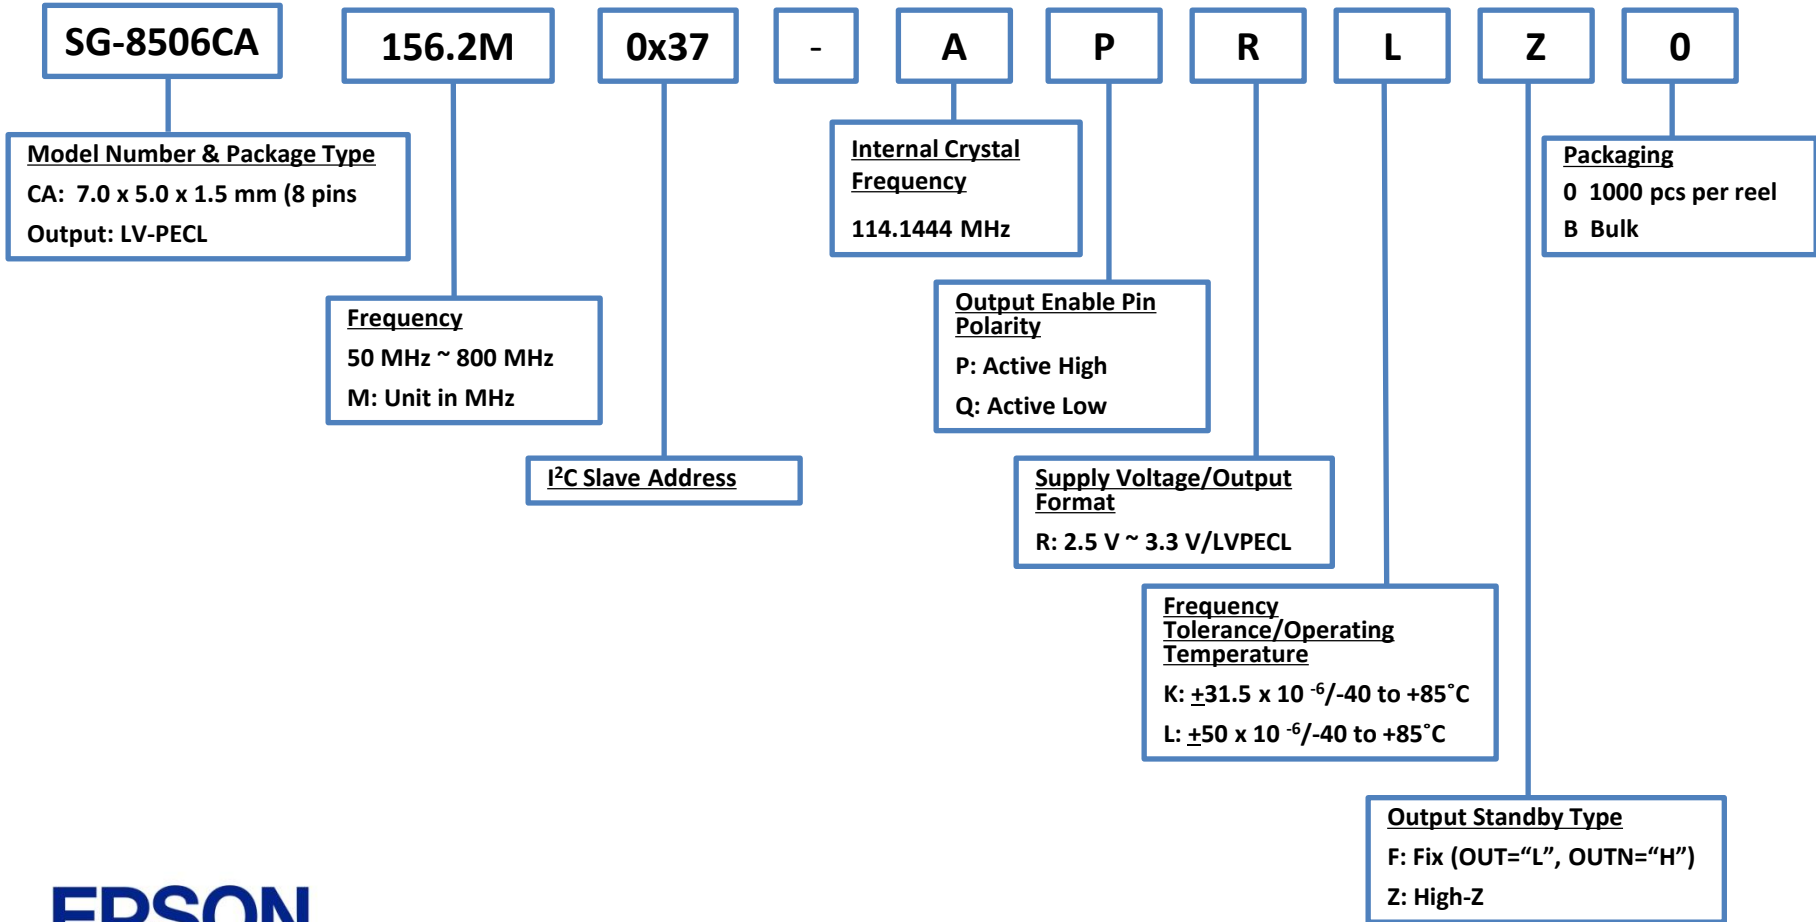


Product Configuration System



Crystal Oscillators - Spread Spectrum

Discontinued

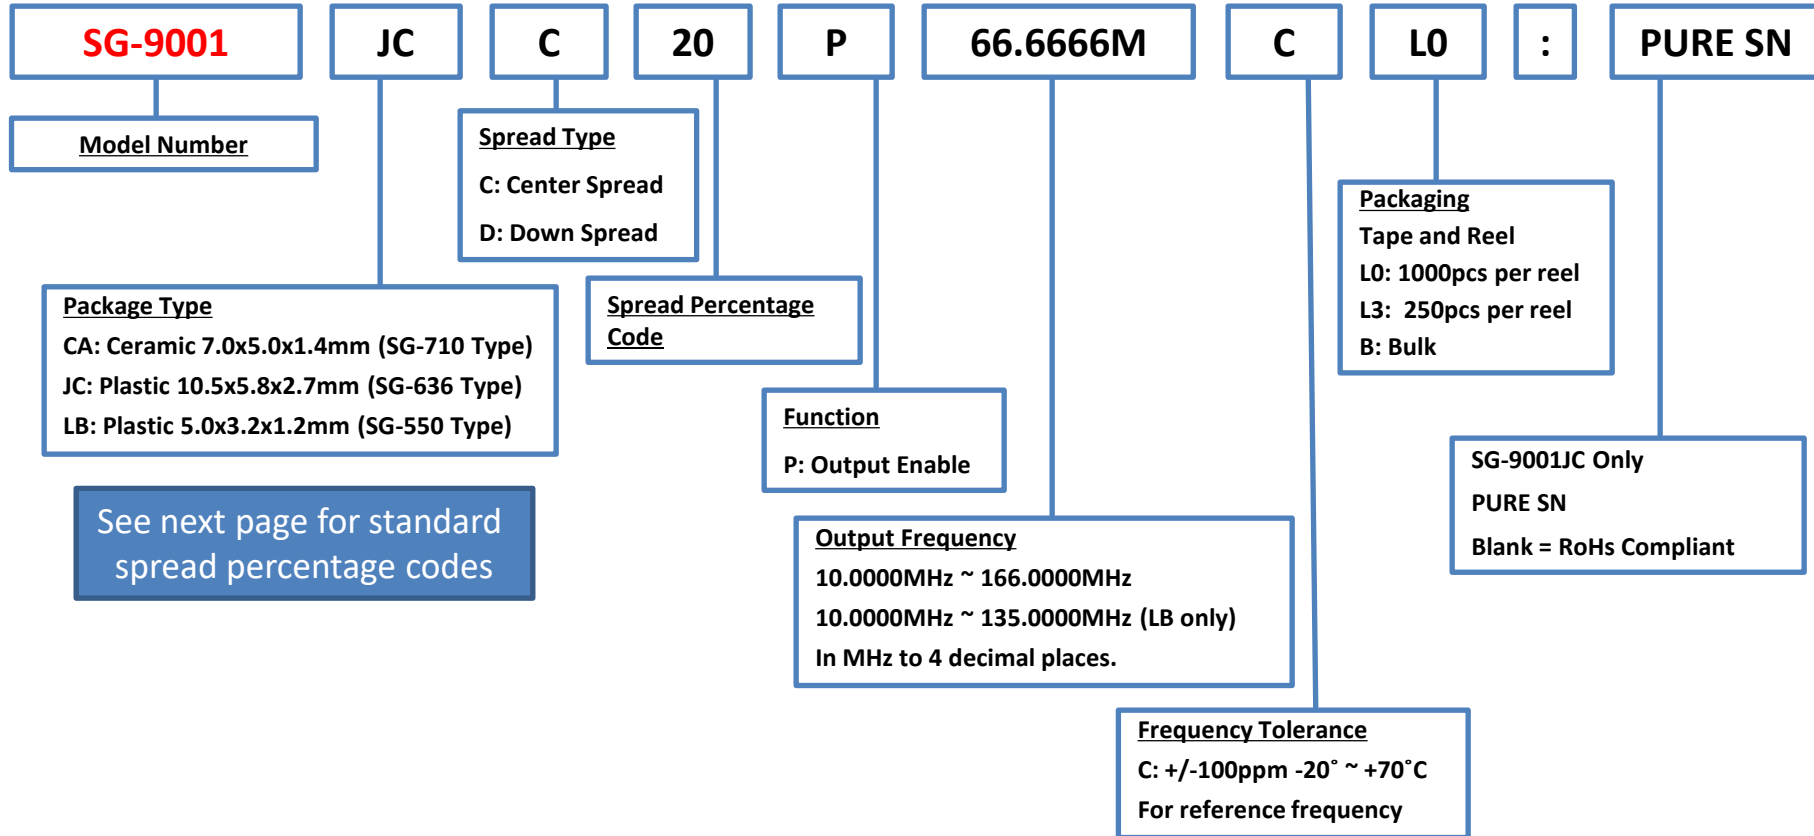

NOTES:
SG-9001CA & SG-9001LB: Complete PB FREE
SG-9001JC: RoHS COMPLIANT

Spread Rate Options


SG-9001

Center Spread		Down Spread	
Product Configuration Code	Spread Rate %	Product Configuration Code	Spread Rate %
C02	+/- 0.25	D05	- 0.5
C05	+/- 0.5	D10	- 1.0
C07	+/- 0.75	D15	- 1.5
C10	+/- 1.0	D20	- 2.0
C15	+/- 1.5	D30	- 3.0
C20	+/- 2.0	D40	- 4.0

Product Configuration System



Crystal Oscillator (SPXO) – Programmable, Spread Spectrum

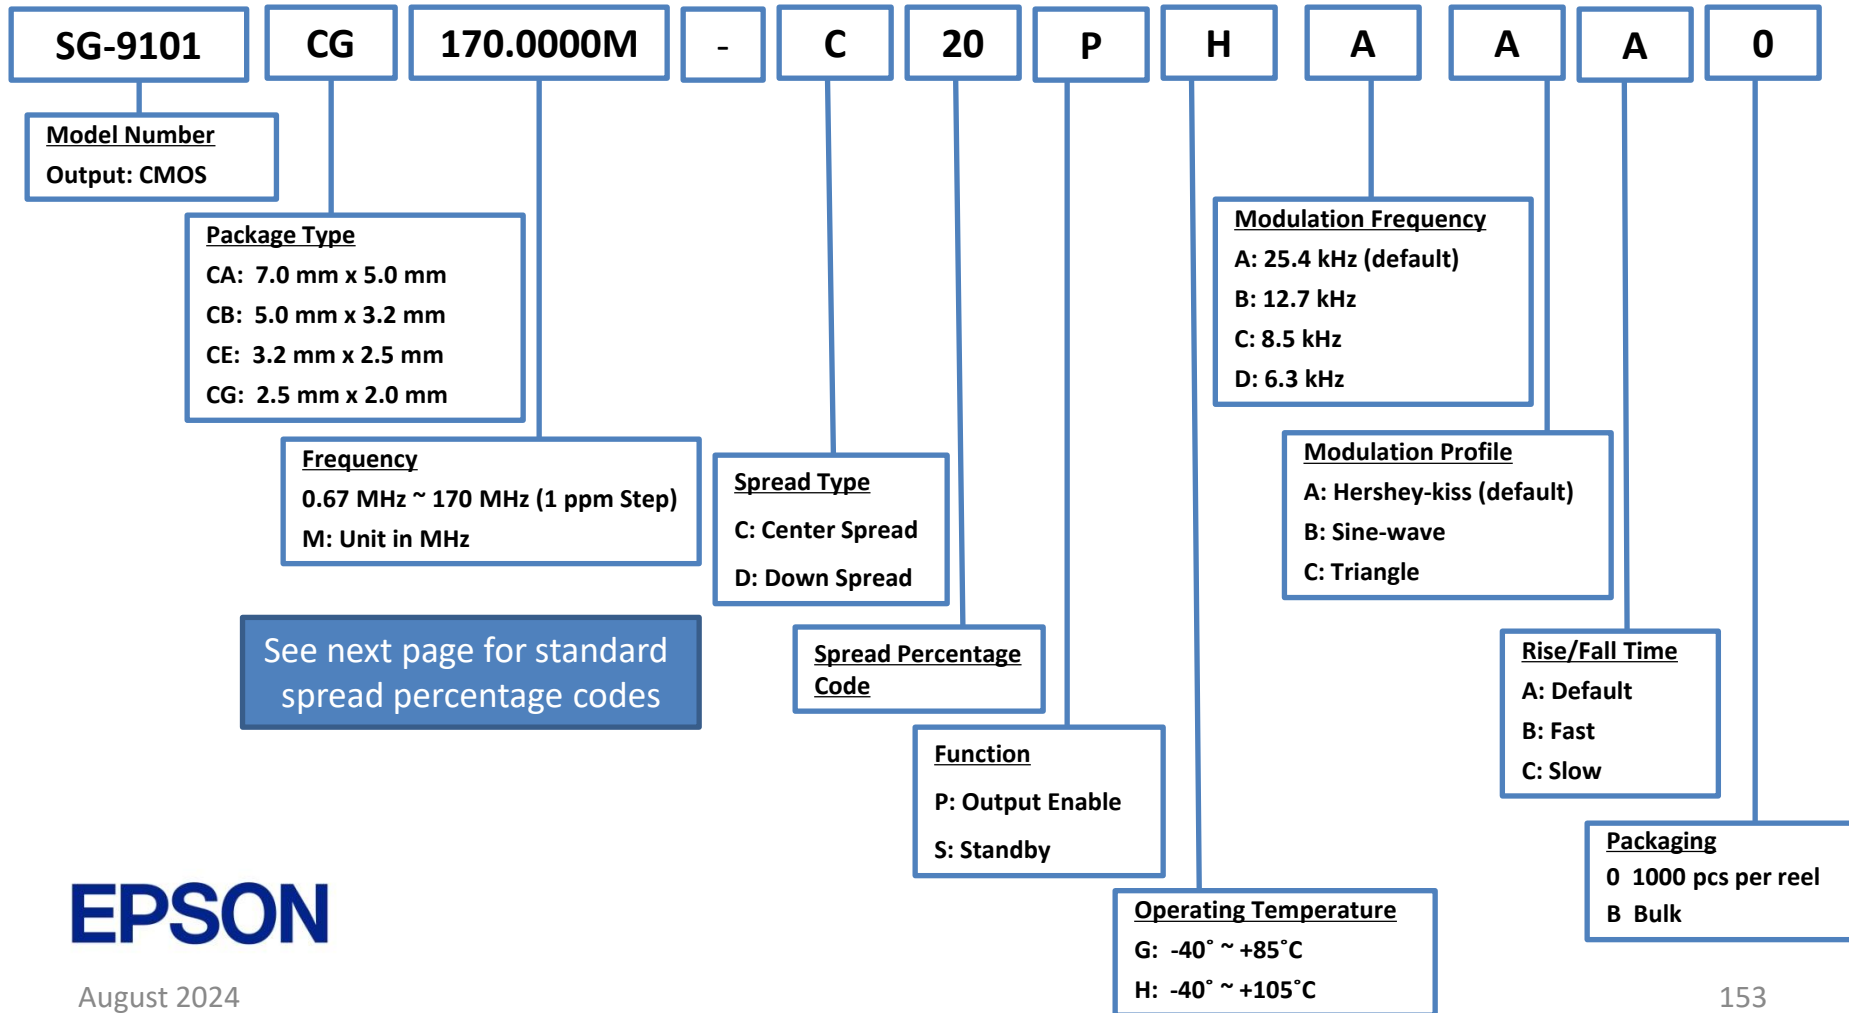

Spread Rate Options


SG-9101

Center Spread		Down Spread	
Product Configuration Code	Spread Rate %	Product Configuration Code	Spread Rate %
C02	+/- 0.25	D05	- 0.5
C05	+/- 0.5	D10	- 1.0
C07	+/- 0.75	D15	- 1.5
C10	+/- 1.0	D20	- 2.0
C15	+/- 1.5	D30	- 3.0
C20	+/- 2.0	D40	- 4.0

Product Configuration System



Crystal Oscillator (SPXO) – Programmable, Spread Spectrum, Automotive (AECQ100)

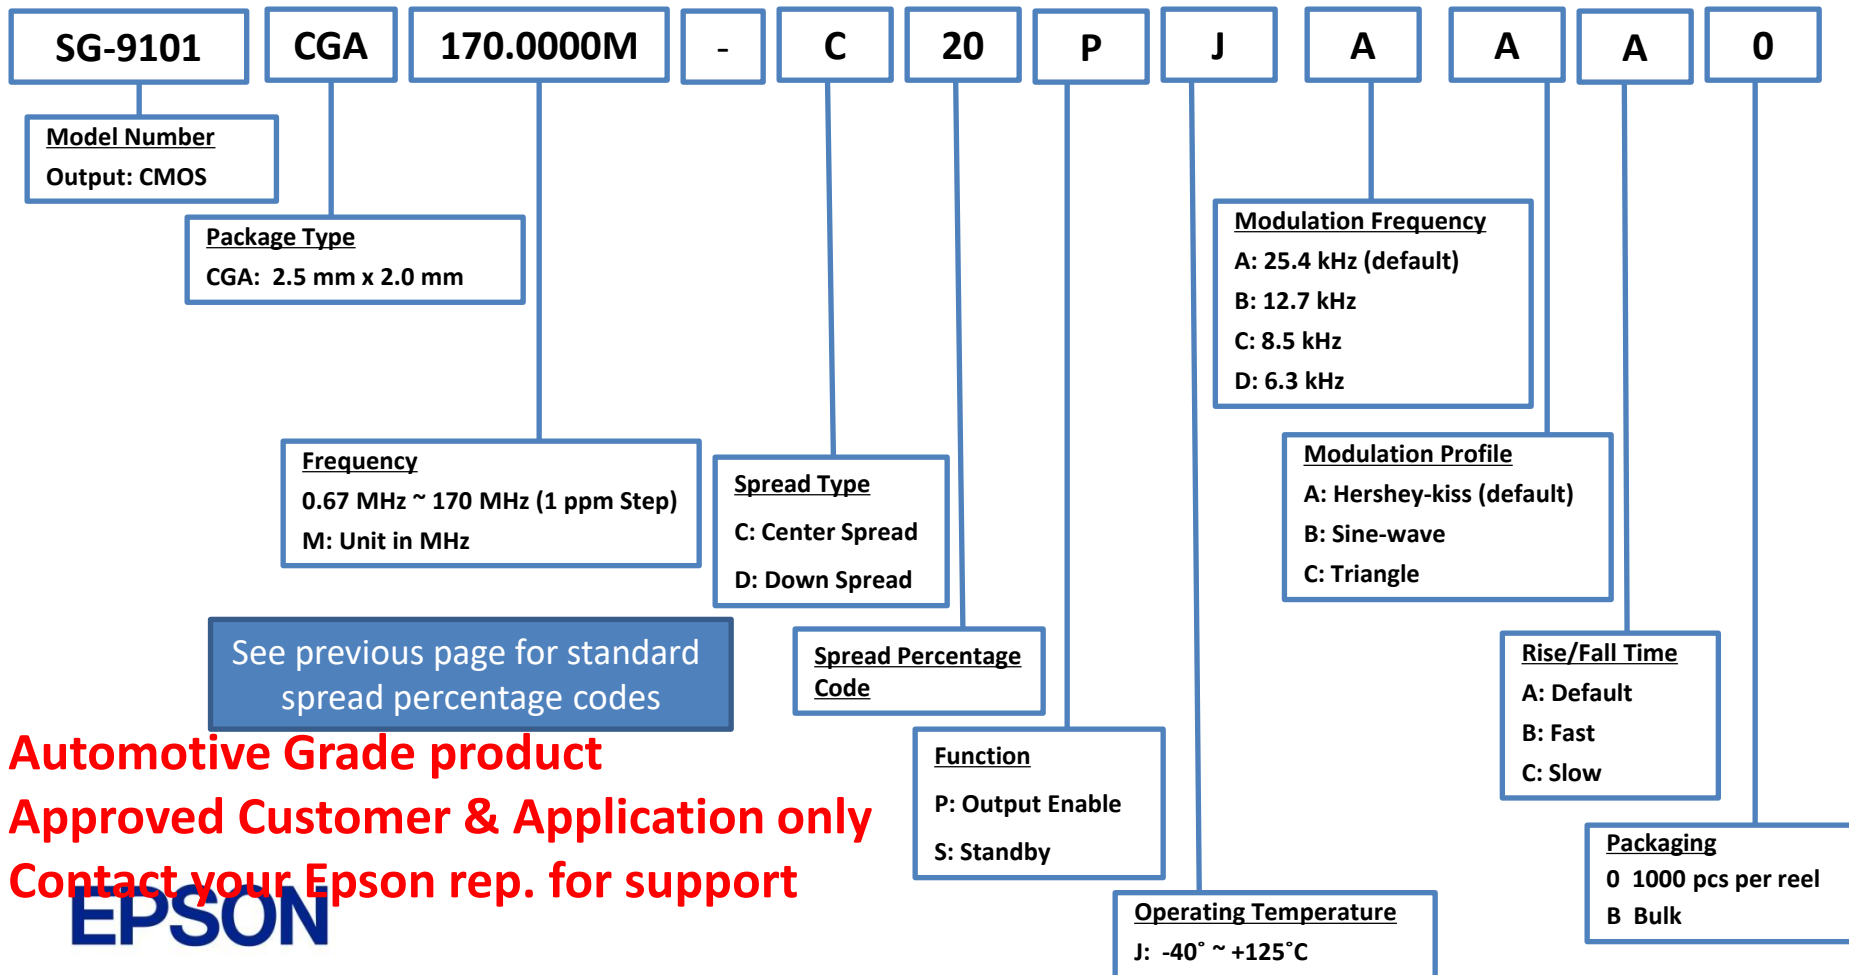


Automotive Grade product
Approved Customer & Application only
Contact your Epson rep. for support



Product Configuration System



Crystal Oscillator (SPXO) – Programmable, Low Jitter, Automotive (AEC-Q100)

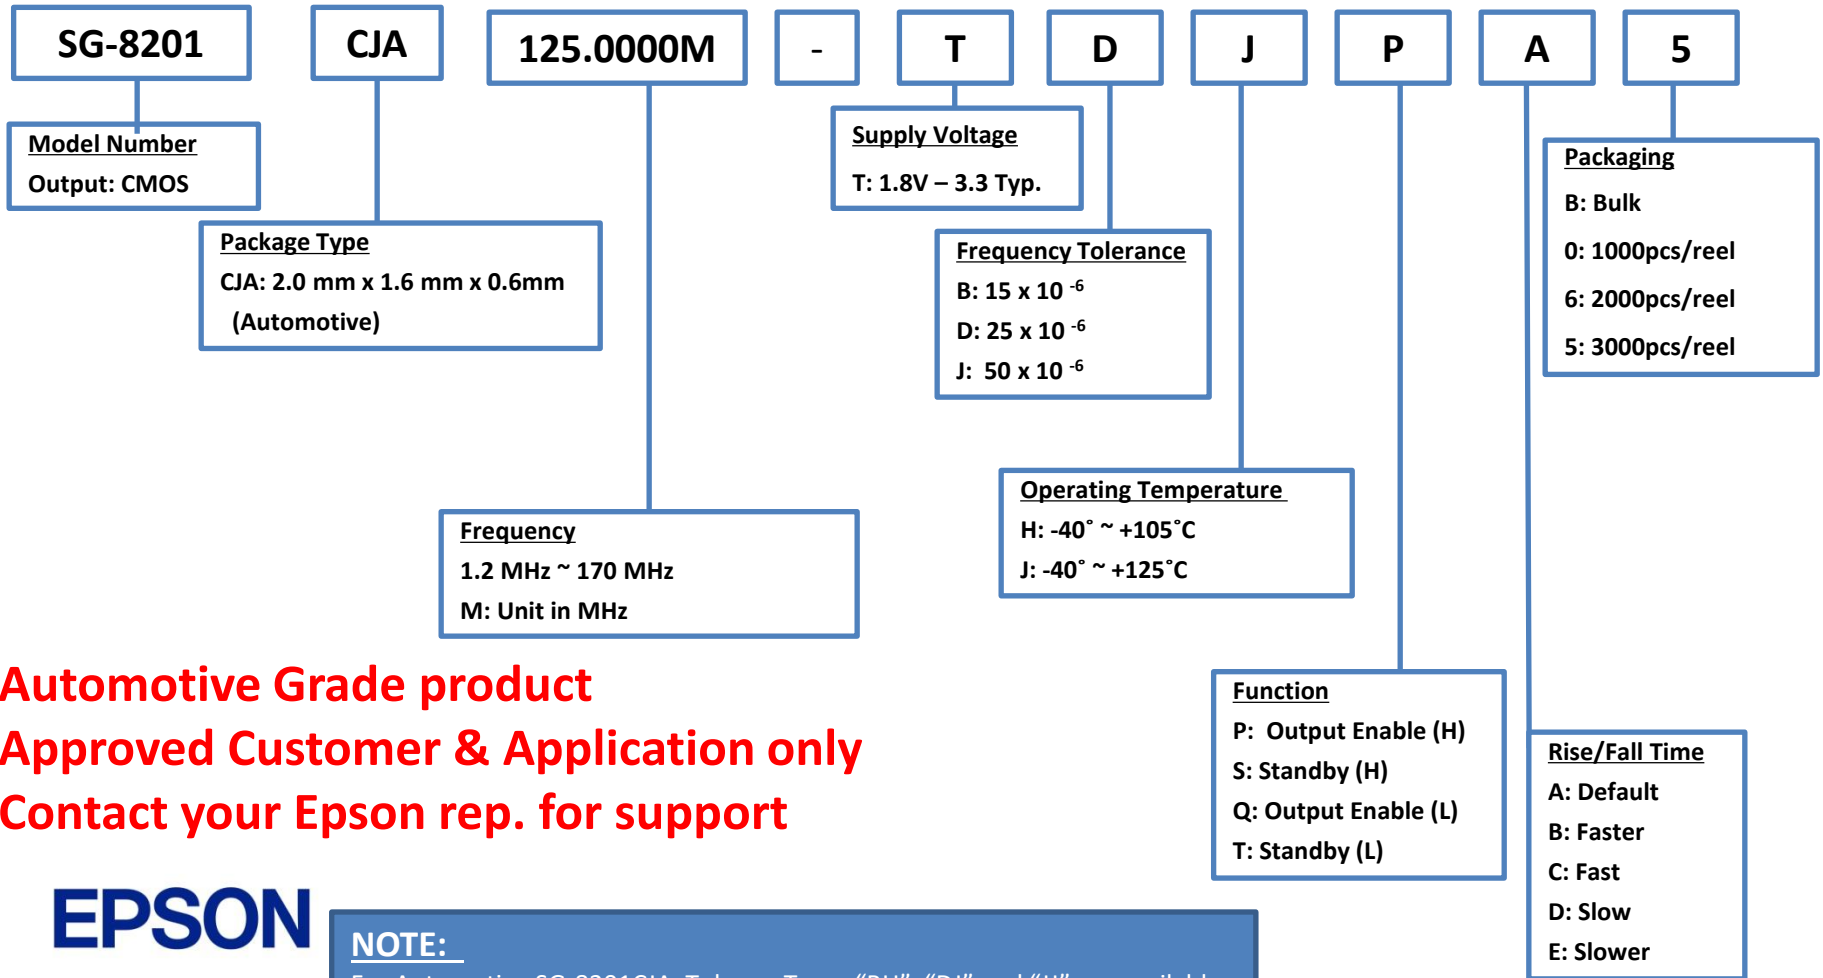

Automotive Grade product
Approved Customer & Application only
Contact your Epson rep. for support



August 2024


NOTE:

For Automotive SG-8201CJA, Tol over Temp “BH”, “DJ” and “JJ” are available. See previous slide for other possible combination.

Product Configuration System



Crystal Oscillator (SPXO) – Programmable & Low Jitter

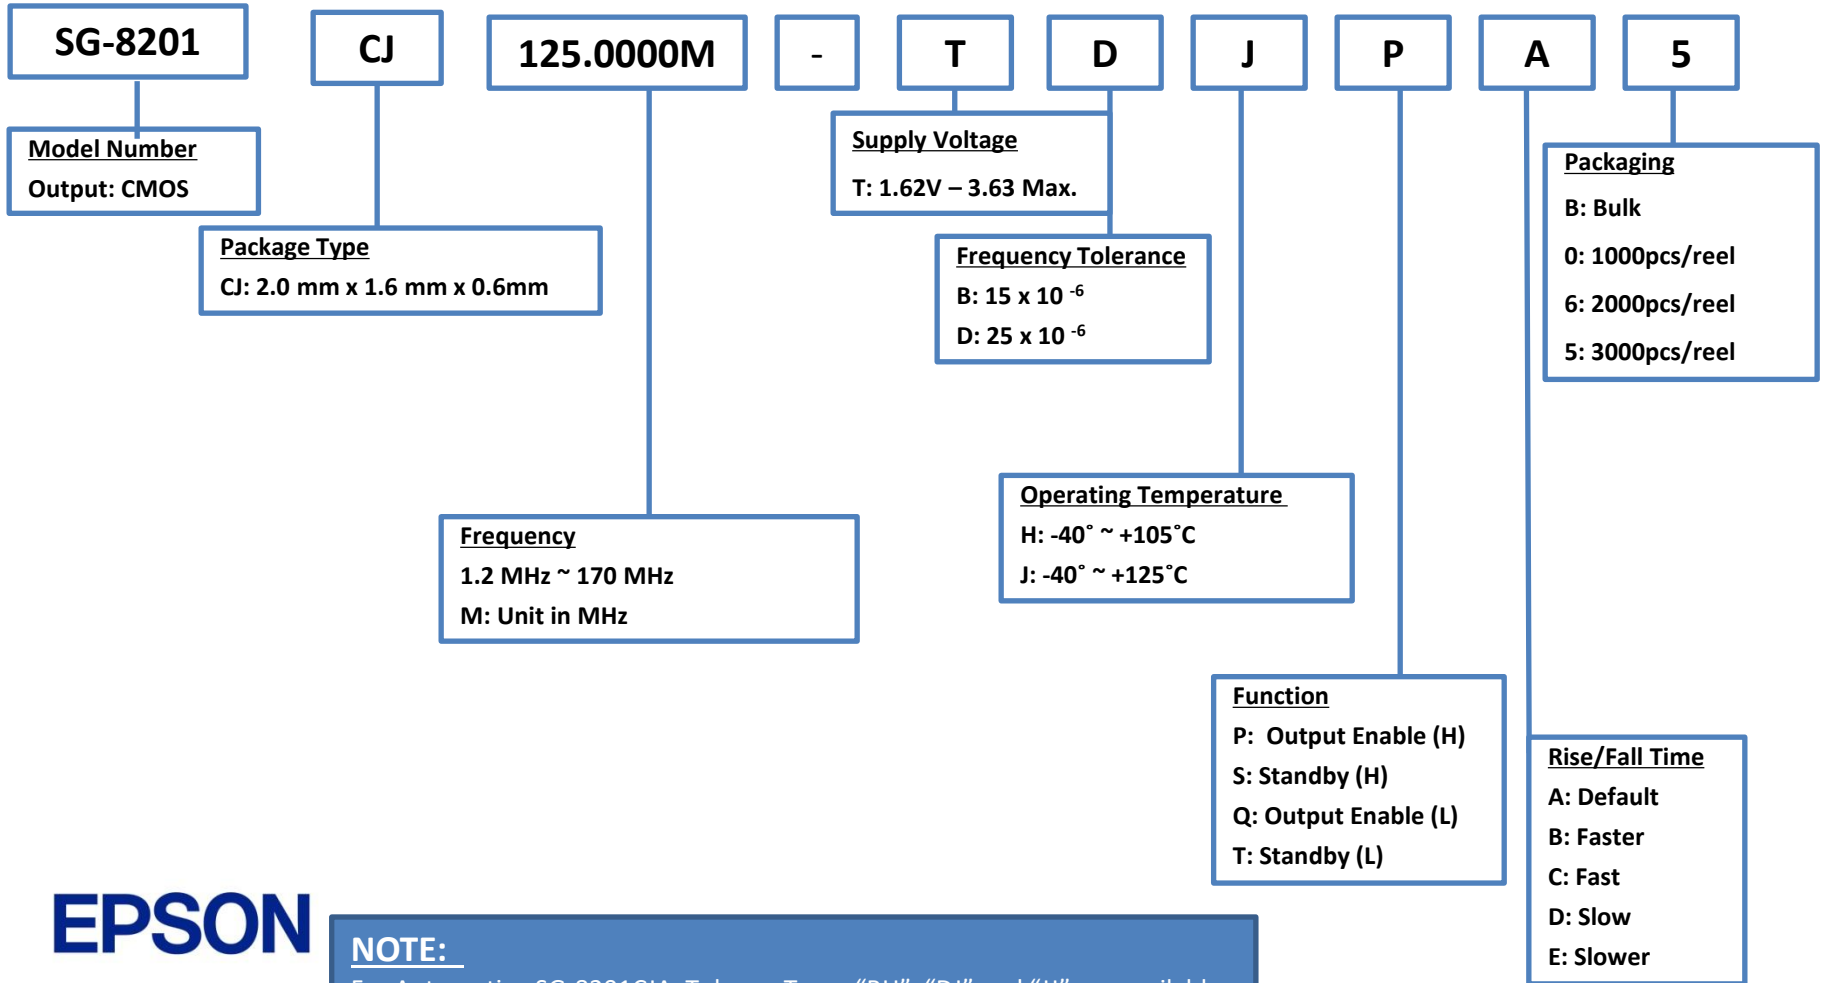

August 2024


NOTE:

For Automotive SG-8201CJA, Tol over Temp “BH”, “DJ” and “JJ” are available. See previous slide for other possible combination.

Product Configuration System



Crystal Oscillator (SPXO) – Programmable & Low Jitter

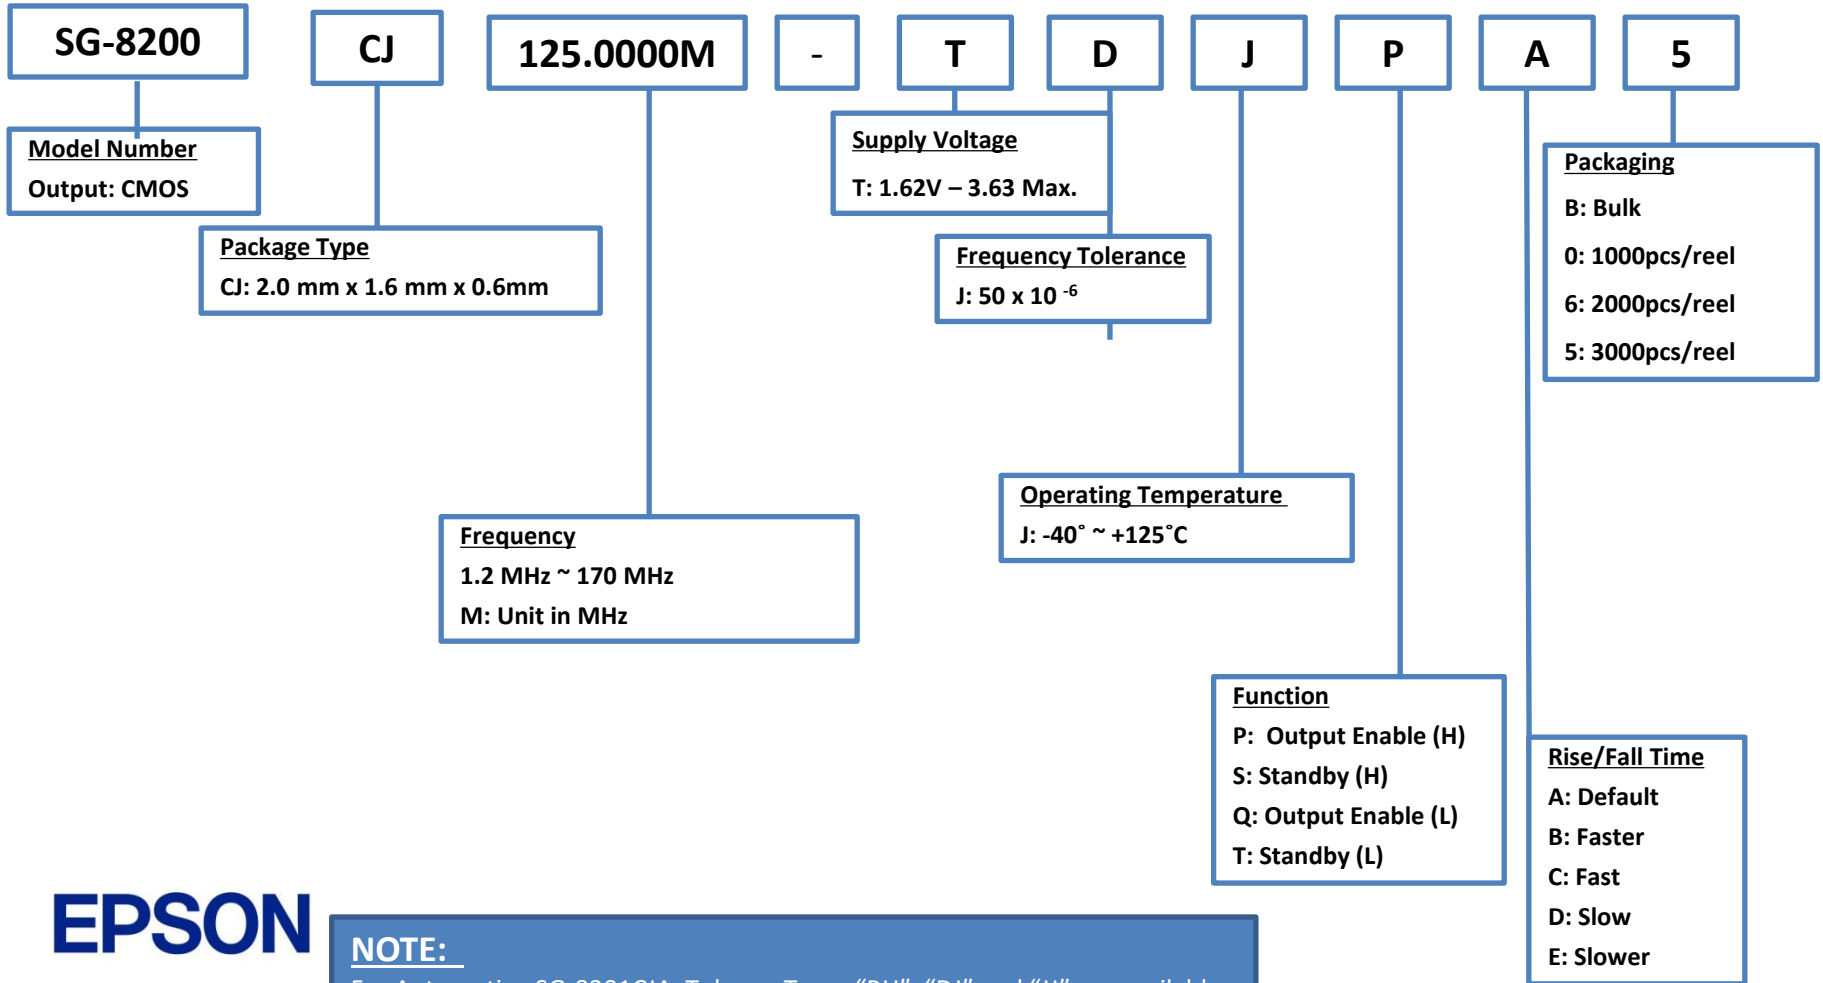

August 2024

NOTE:

For Automotive SG-8201CJA, Tol over Temp “BH”, “DJ” and “JJ” are available. See previous slide for other possible combination.


Product Configuration Guide

VOLTAGE CONTROLLED OSCILLATORS




Product Configuration System

Oscillators - VCXO

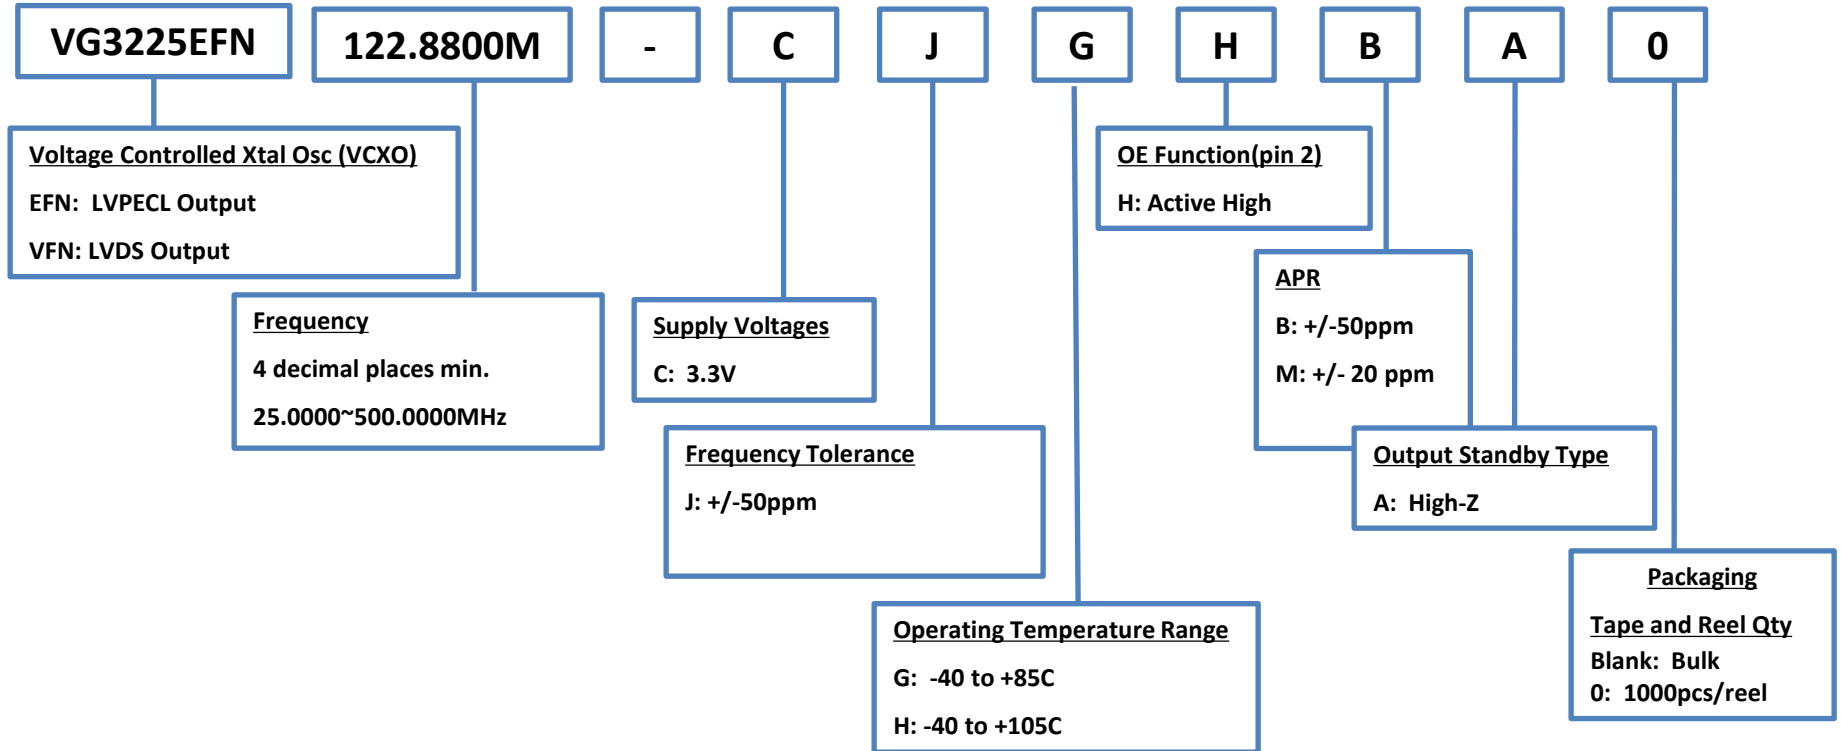


Product Configuration System

Oscillators - VCXO

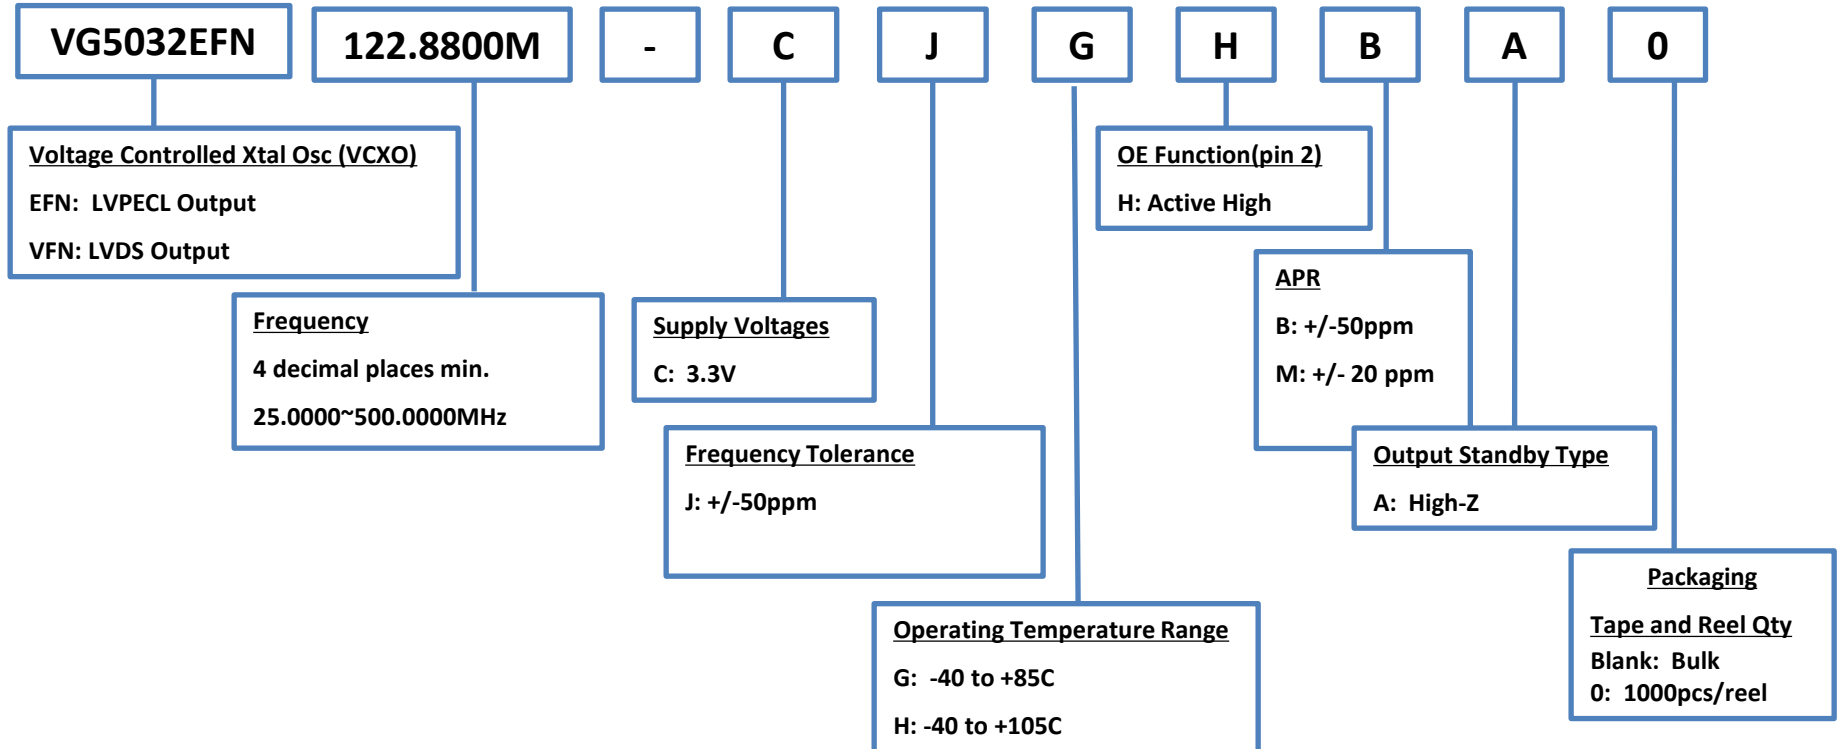

Product Configuration System


Oscillators - VCXO

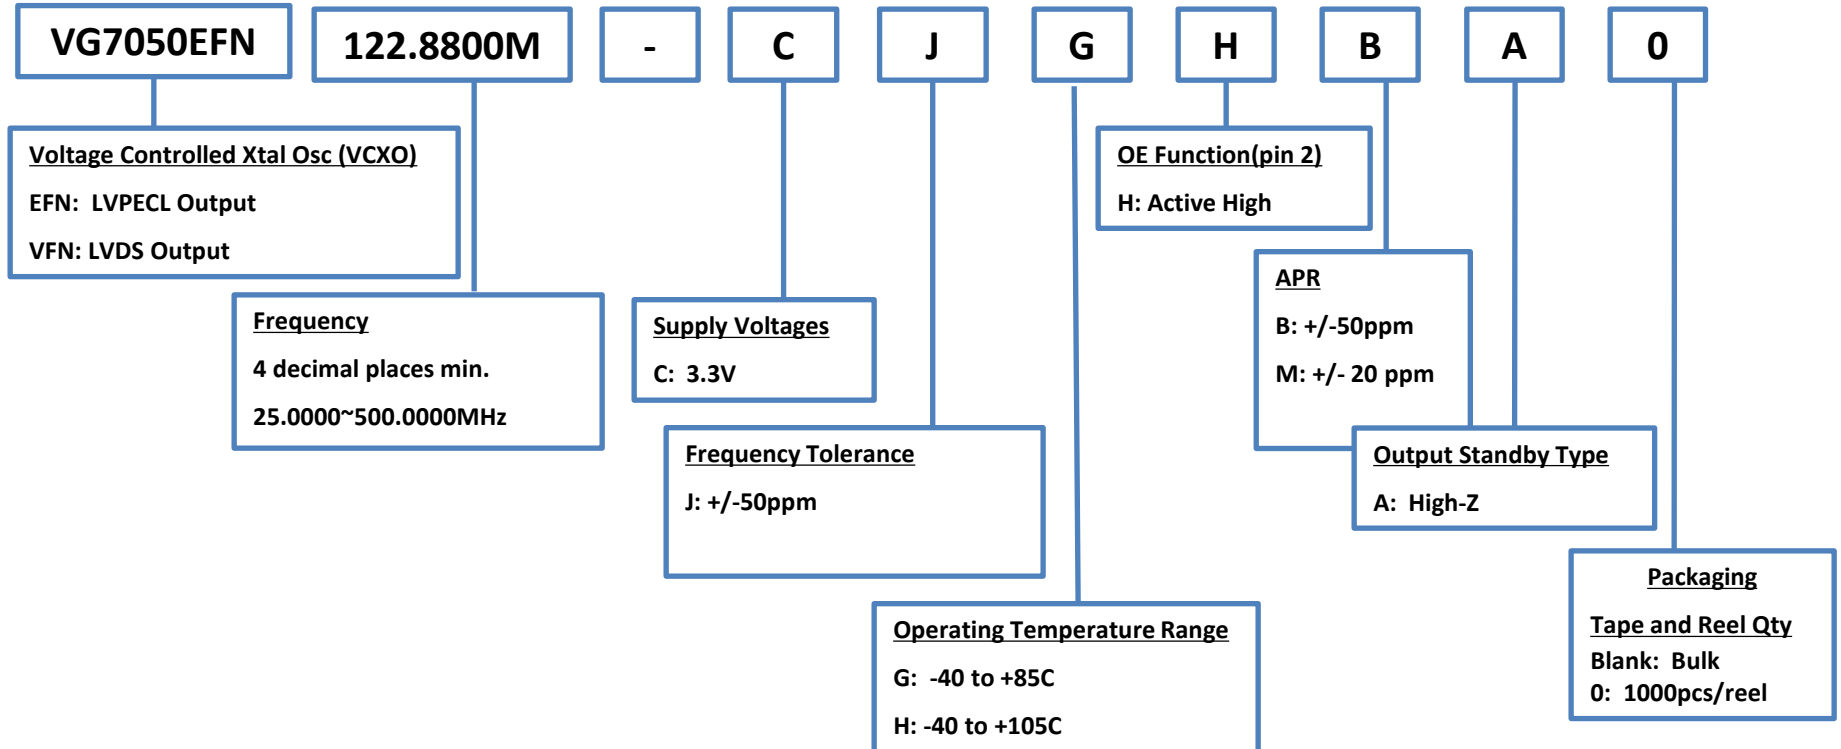

Product Configuration System

Oscillators - VCXO

Discontinued

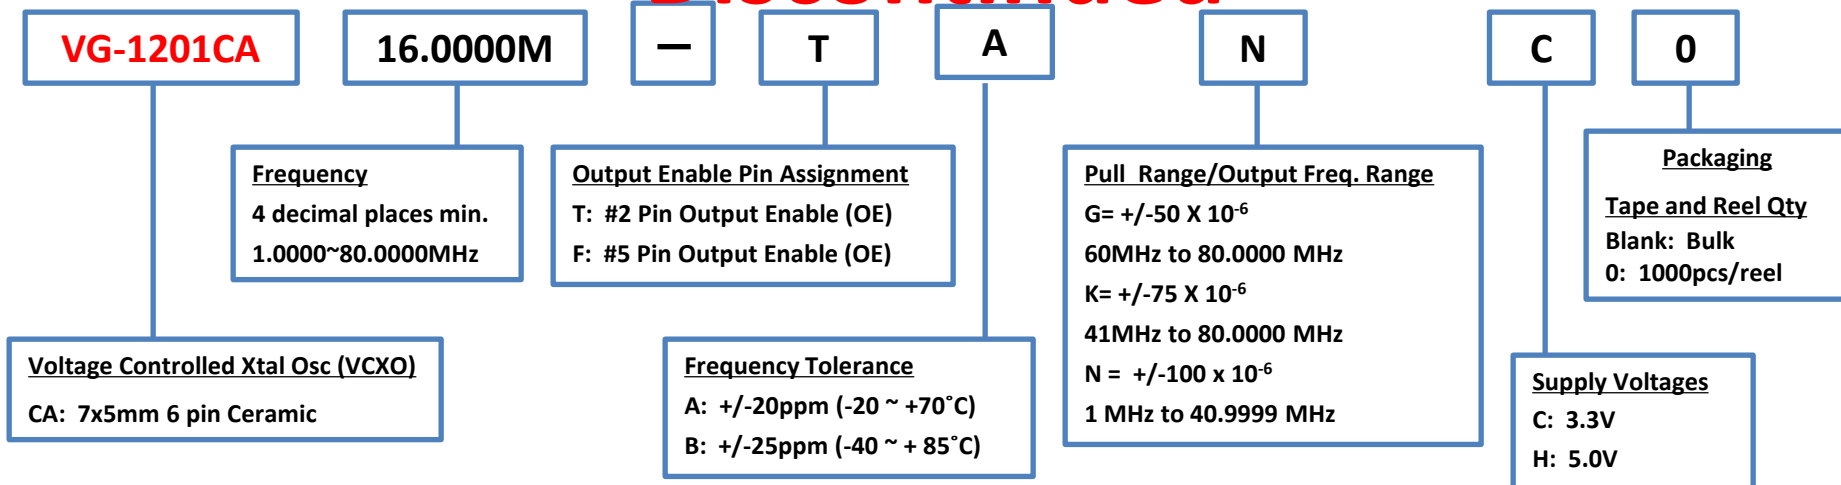

CODE	STABILITY	OPERATING TEMP.	PULL RANGE	OUTPUT FREQ.
ANC / ANH	+/-20PPM	-20C to +70°C	+/-100PPM	1MHz to 40.9999MHz
AKC / AKH	+/-20PPM	-20C to +70°C	+/-75PPM	41MHz to 80.0000MHz
BNC / BNH	+/-25PPM	-40C to +85°C	+/-100PPM	1MHz to 40.9999MHz
BKC / BKH	+/-25PPM	-40C to +85°C	+/-75PPM	41MHz to 80.0000MHz

Product Configuration System



Oscillators - VCXO

Not Recommended

VG-4231CA

12.2880M

-

T

D

R

C

0

Voltage Controlled Xtal Osc (VCXO)

CA: 7x5mm 6 pin Ceramic

Output Enable Pin Assignment

T: #2 Pin Output Enable, 50Kohm min. input impedance

F: #5Pin Output Enable, 50Kohm min. input impedance

Z: #2pin Output Enable, 10Mohm min. input impedance

M: #5pin Output Enable, 10Mohm min. input impedance

Packaging

Tape and Reel Qty

Blank: Bulk

0: 1000pcs/reel

Frequency

1.0000~60.0000MHz

4 decimal places min.

Frequency Tolerance

D: +/-35ppm (-20 ~ +70°C)

G: +/-50ppm (-40 ~ + 85°C)

Freq Control Range

R: +/-130 X 10⁻⁶

Supply Voltage

C: 3.3V

H: 5.0V

Available Combinations

TDRH / TDRH / FDRH / FDRH

TGRC / TGRH / FGRC / FGRH

NOTE:

Output Enable Pin Assignment Z and M are not available with Supply Voltage H (5.0V)


EPSON

August 2024




Product Configuration System

Oscillators - VCXO

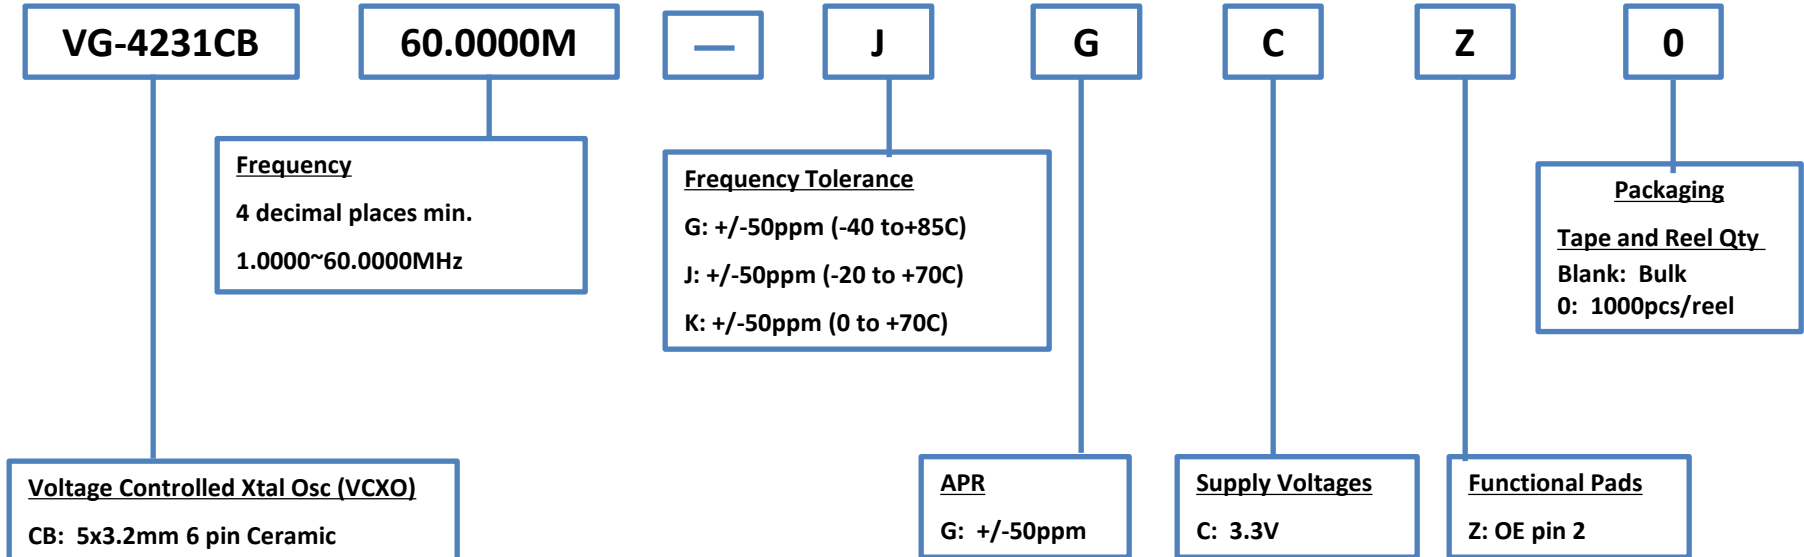

Product Configuration System

Oscillators - VCXO

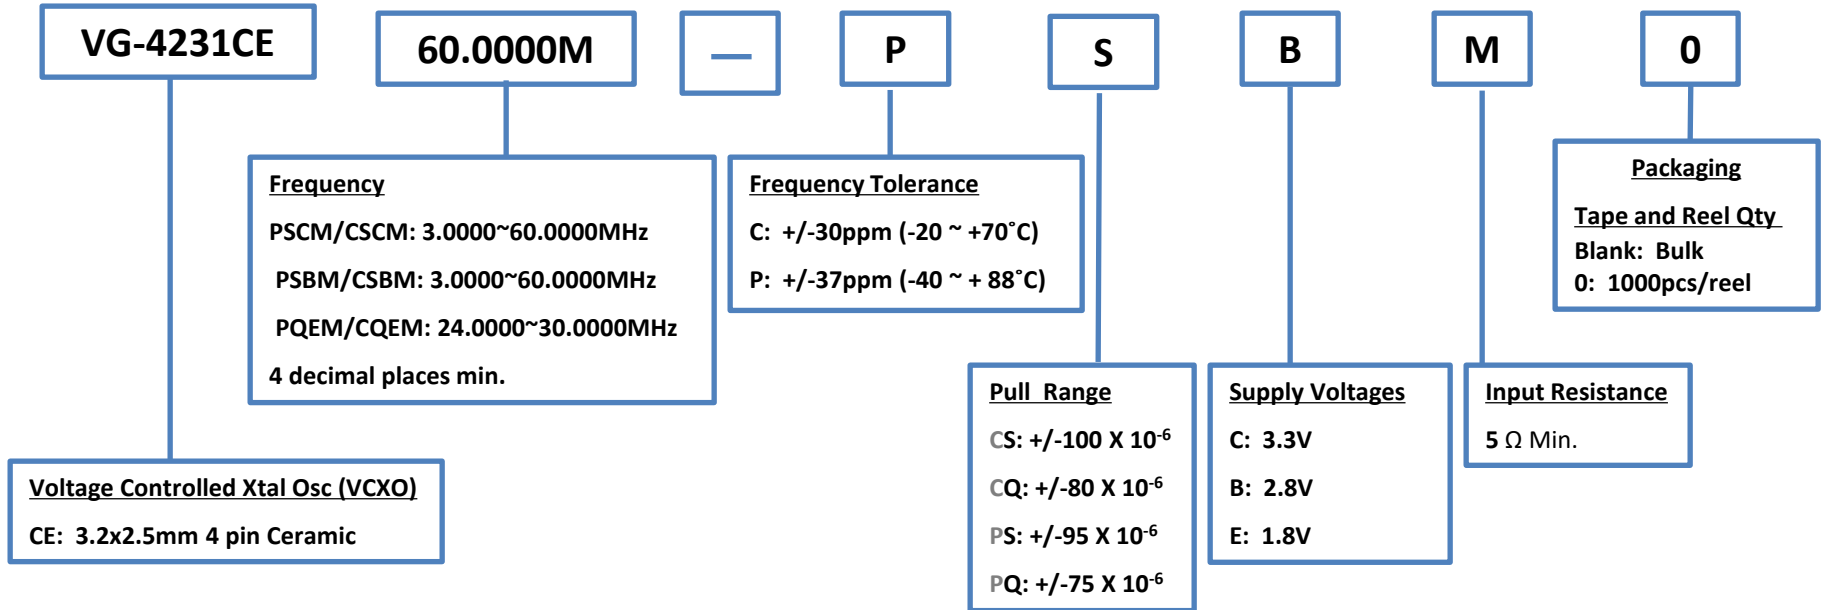

CODE		Frequency Tolerance	Temperature Range	Absolute Pull Range
CSCM / CSBM/CQEM	C	$\pm 30 \times 10^{-6}$	-20 °C to +70 °C	S : $\pm 100 \times 10^{-6}$ / Q : $\pm 80 \times 10^{-6}$
PSCM/PSBM/PQEM	P	$\pm 37 \times 10^{-6}$	-40 °C to +85 °C	S : $\pm 95 \times 10^{-6}$ / Q : $\pm 75 \times 10^{-6}$

Product Configuration System



Oscillators - VCXO

Discontinued

VG-4232CA

61.4400M

-

T

G

G

C

0

Voltage Controlled Xtal Osc (VCXO)

CA: 7x5mm 6 pin Ceramic

Frequency

60.0001~80.0000MHz

4 decimal places min.

Absolute Pull Range

G: $\pm 50 \times 10^{-6}$

Supply Voltage

C: 3.3V

H: 5.0V

Output Enable Pin Assignment

T: #2 Pin Output Enable, 50Kohm min. input impedance

F: #5Pin Output Enable, 50Kohm min. input impedance

Z: #2pin Output Enable, 10Mohm min. input impedance

M: #5pin Output Enable, 10Mohm min. input impedance

Frequency Tolerance

G: ± 50 ppm (-40 ~ + 85°C)

J: ± 50 ppm (-20 ~ + 70°C)

K: ± 50 ppm (-0 ~ + 70°C)

Packaging

Tape and Reel Qty

Blank: Bulk

0: 1000pcs/reel


EPSON



Product Configuration System

Oscillators - VCXO

Not Recommended

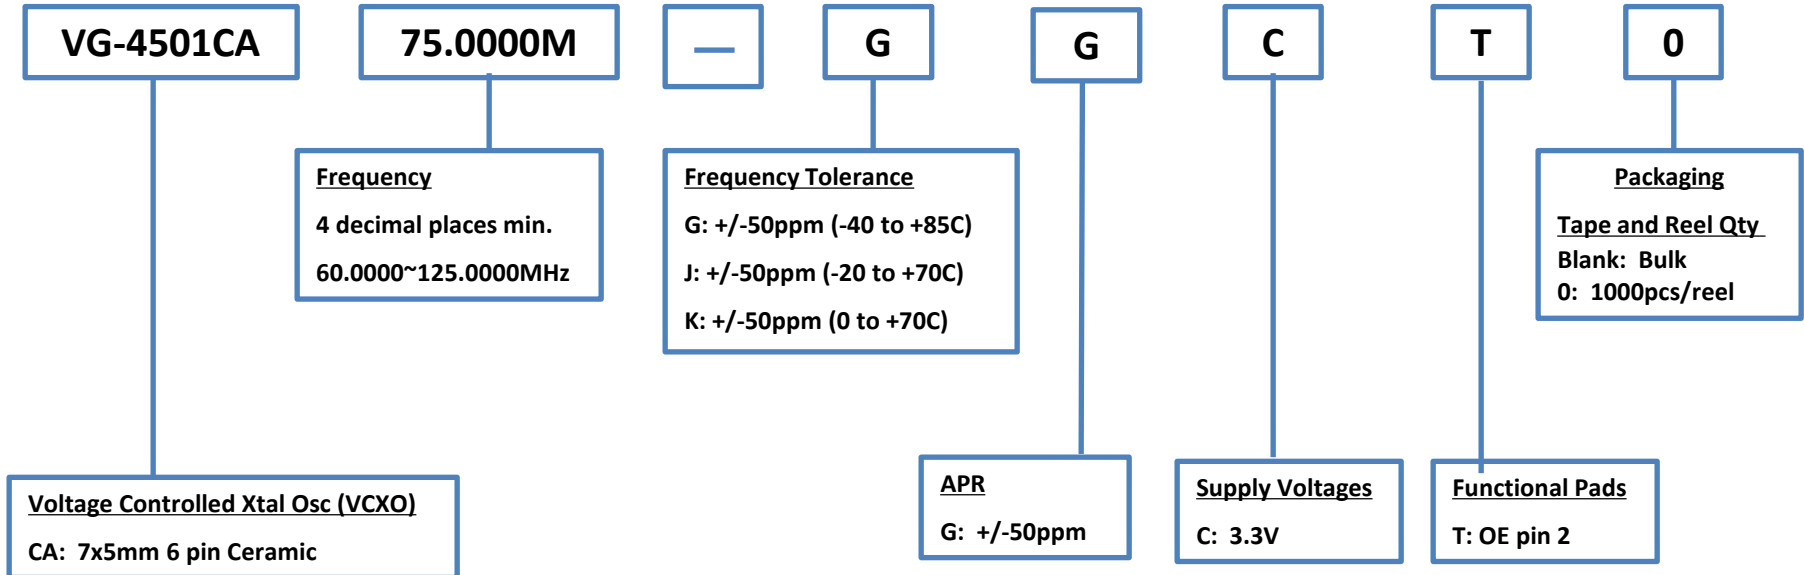




Product Configuration System

Oscillators - VCXO

Not Recommended

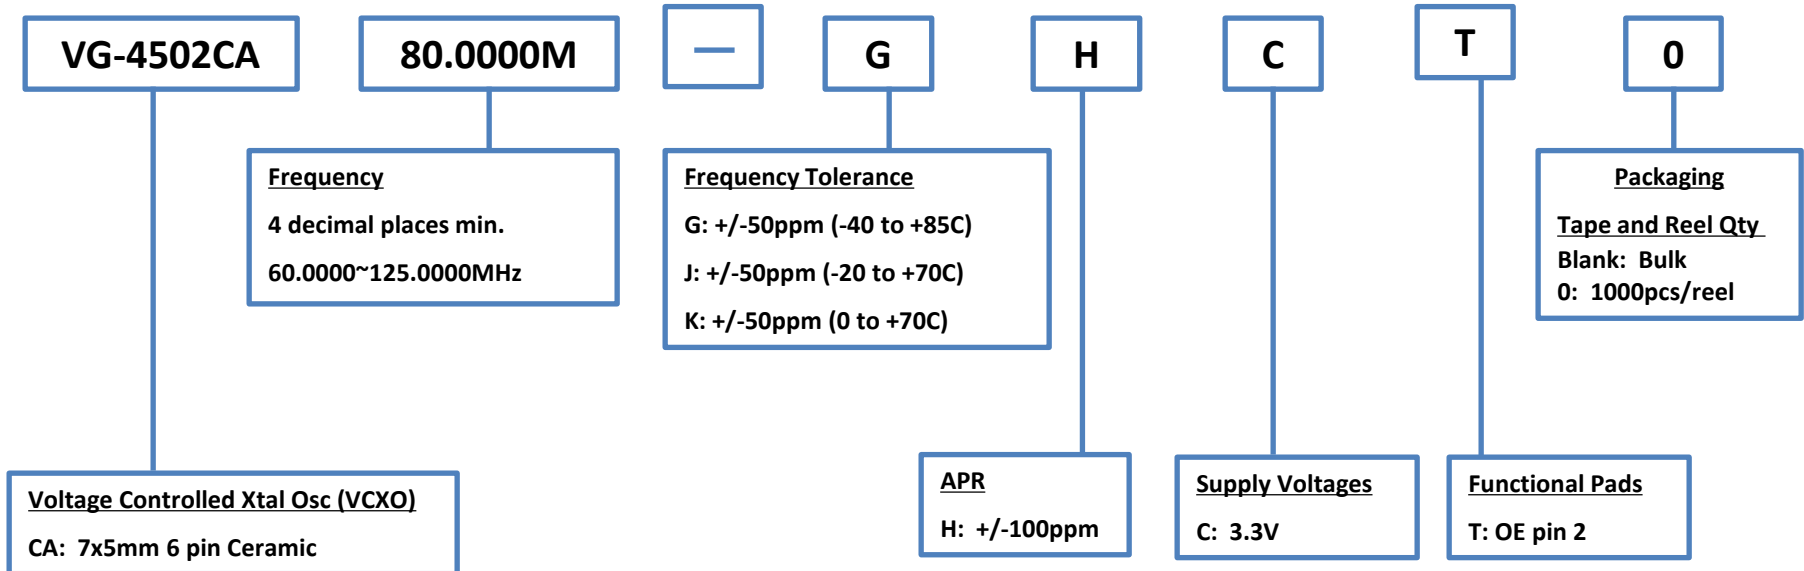




Product Configuration System

Oscillators - VCXO

Discontinued

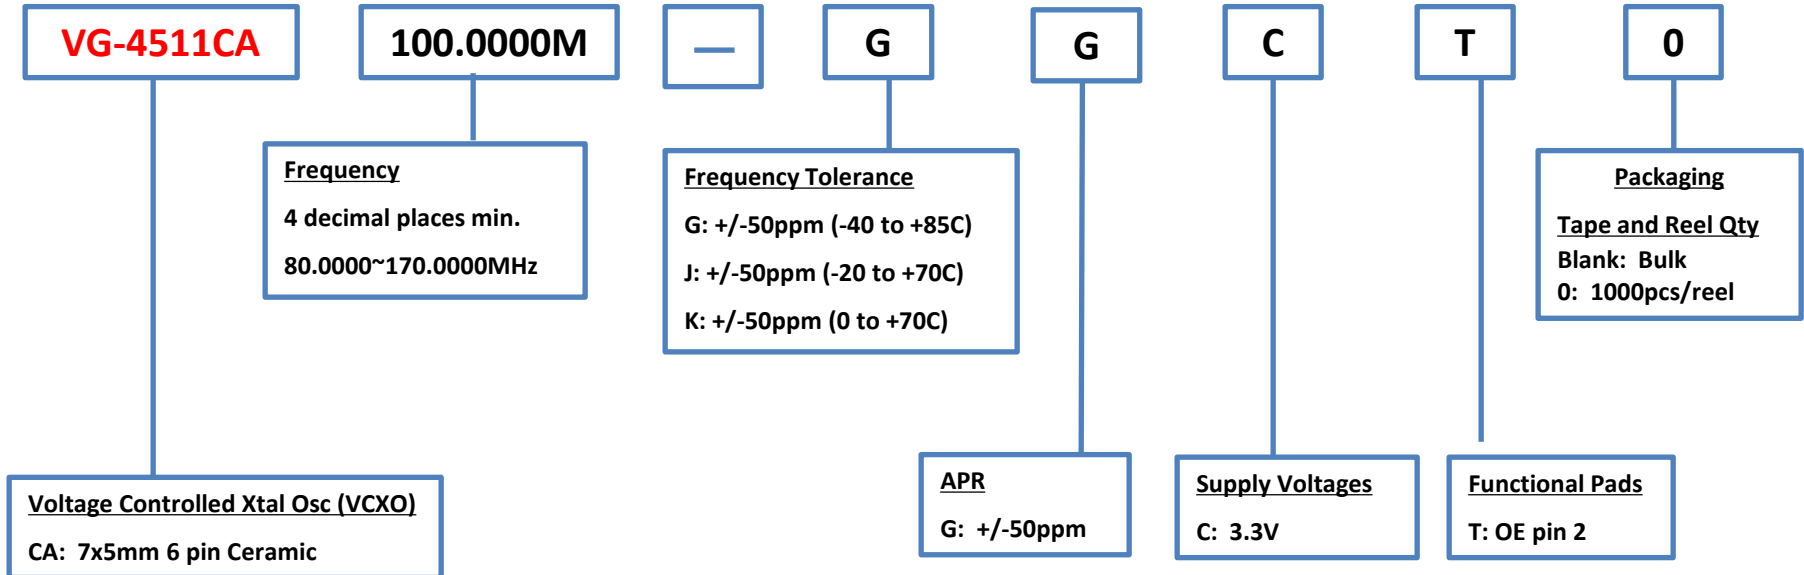




Product Configuration System

Oscillators - VCXO

Discontinued

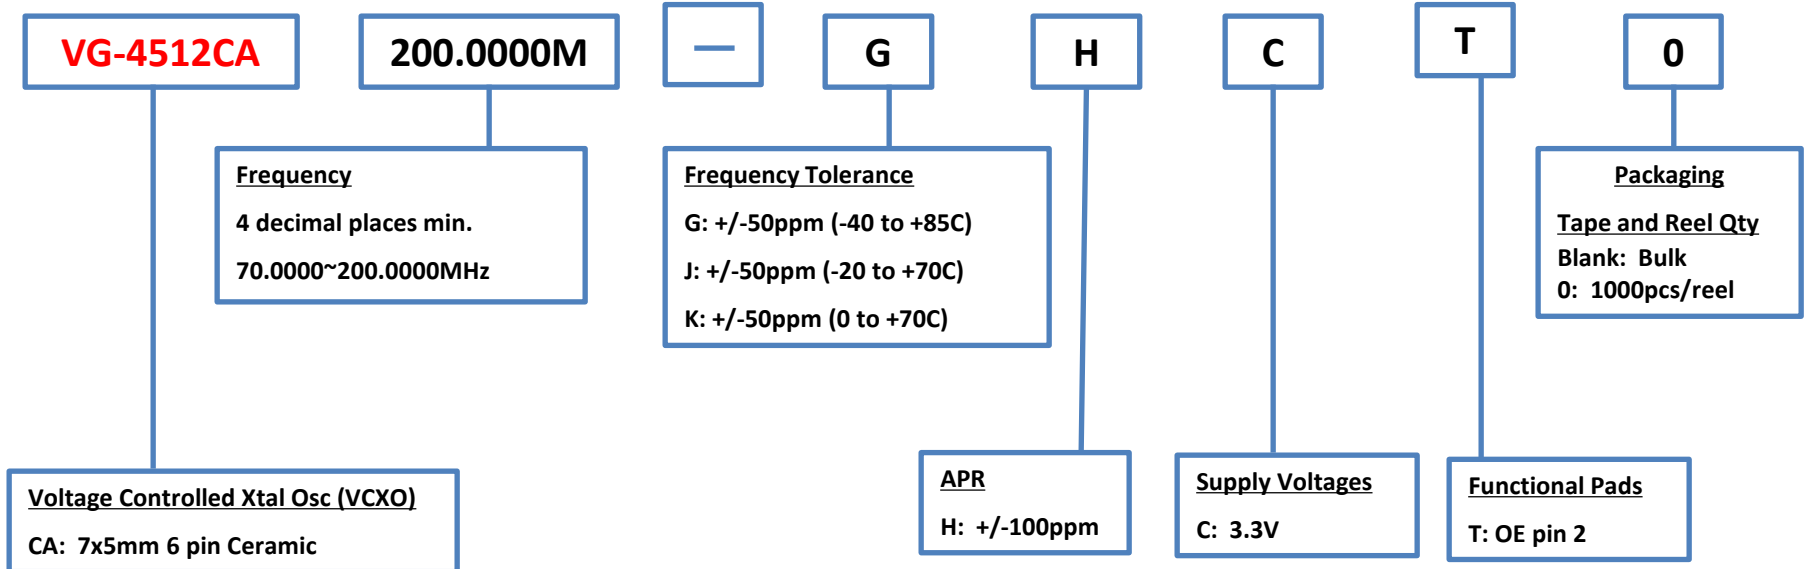




Product Configuration System

Oscillators - VCXO

Discontinued

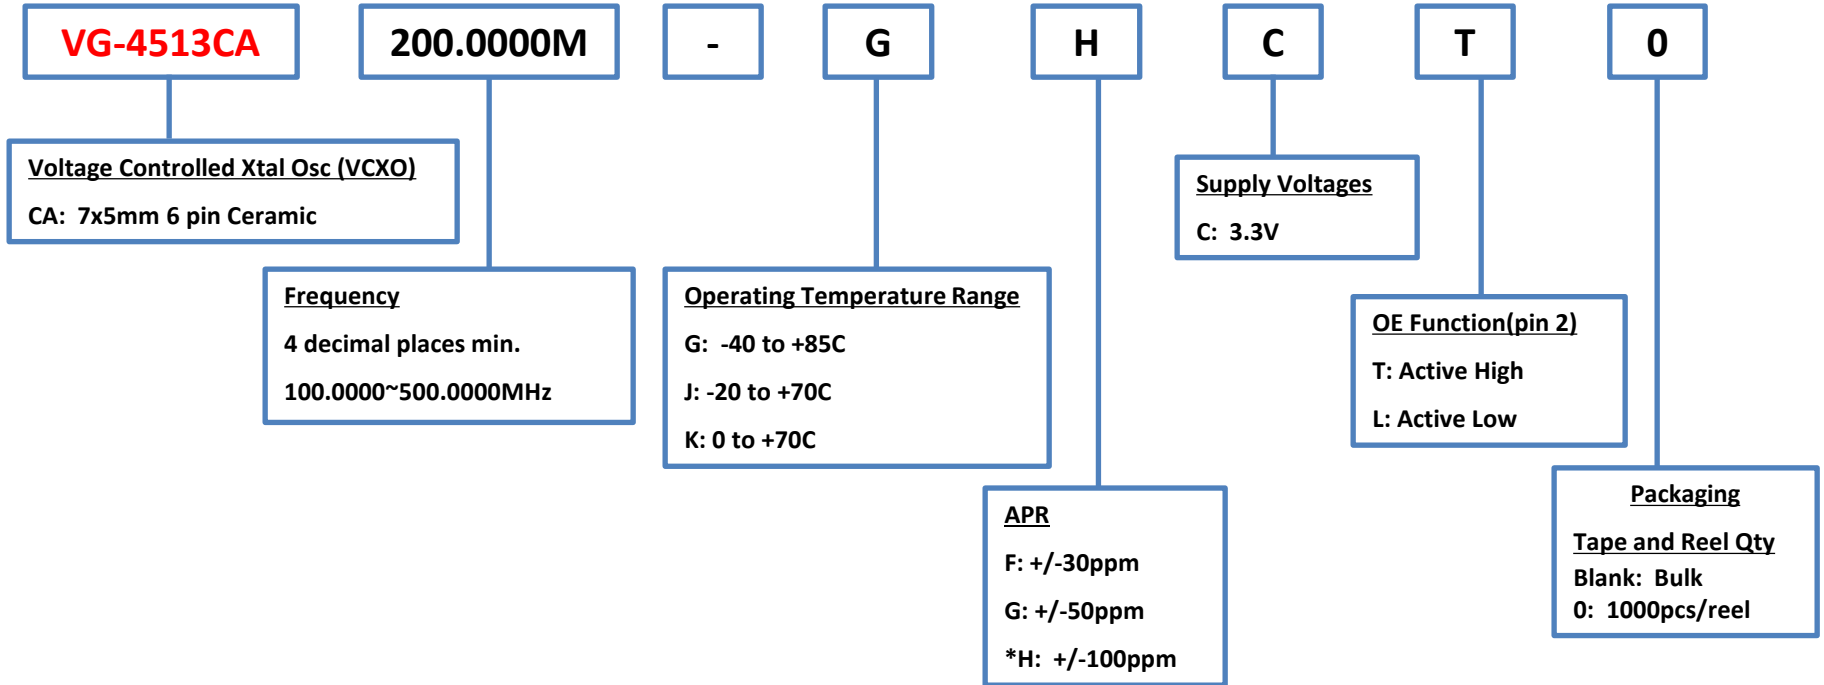

*Only 120MHz ≤ f₀ ≤ 200MHz are available

NOTE:

Standard Frequencies Offered: 100M, 122.88M, 125M, 148.351M, 148.5M, 153.6M, 155.52M, 156.25M, 200M

Please contact us for requirements not listed in this specification.






Product Configuration System

Oscillators - VCXO

Discontinued

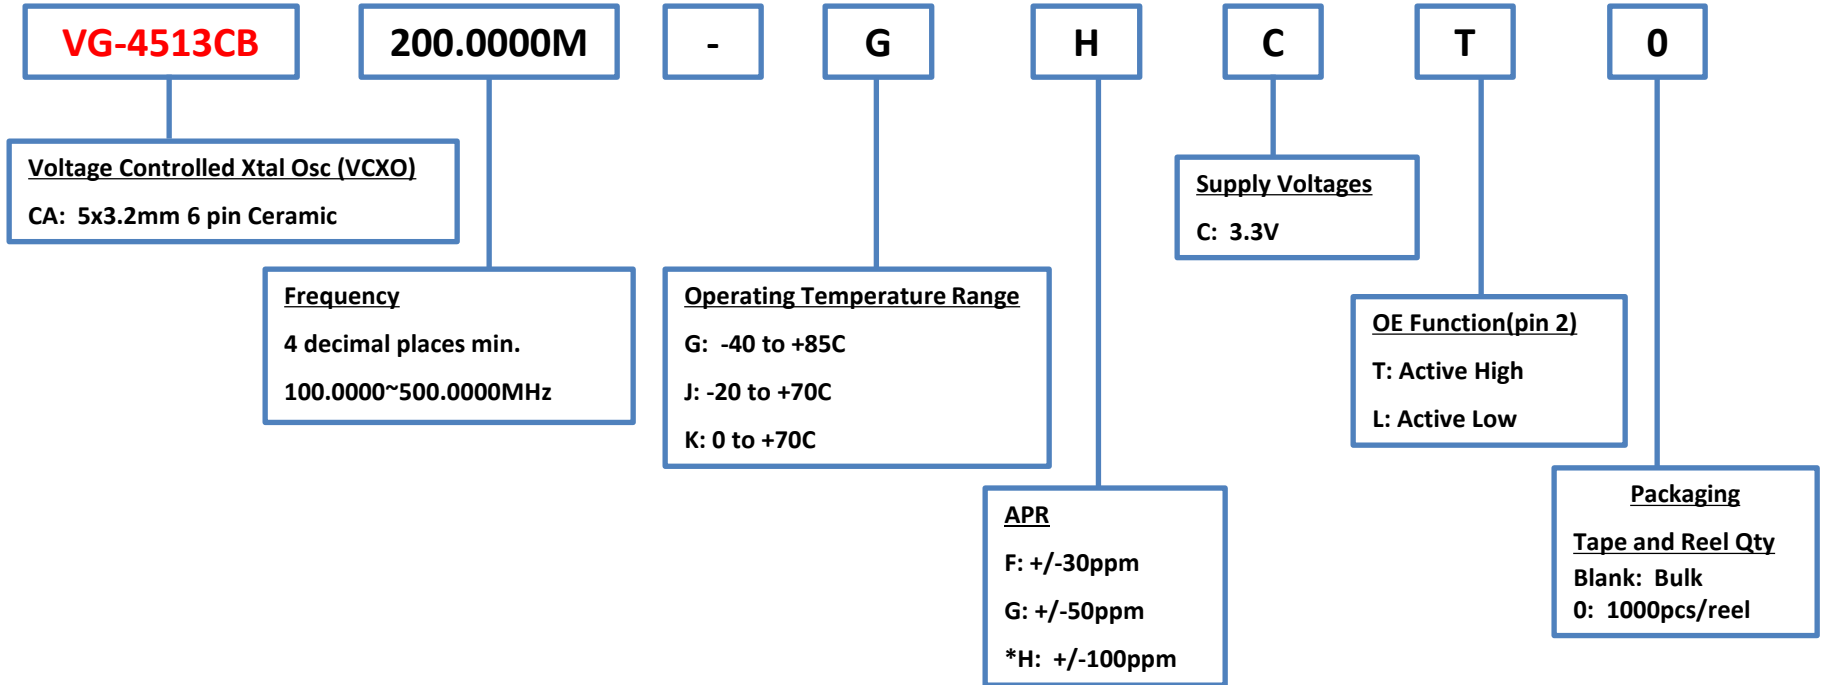

*Only 120MHz ≤ f₀ ≤ 200MHz are available

NOTE:

Standard Frequencies Offered: 122.88M, 153.6M


Please contact us for requirements not listed in this specification.



Product Configuration System




Oscillators - VCSO

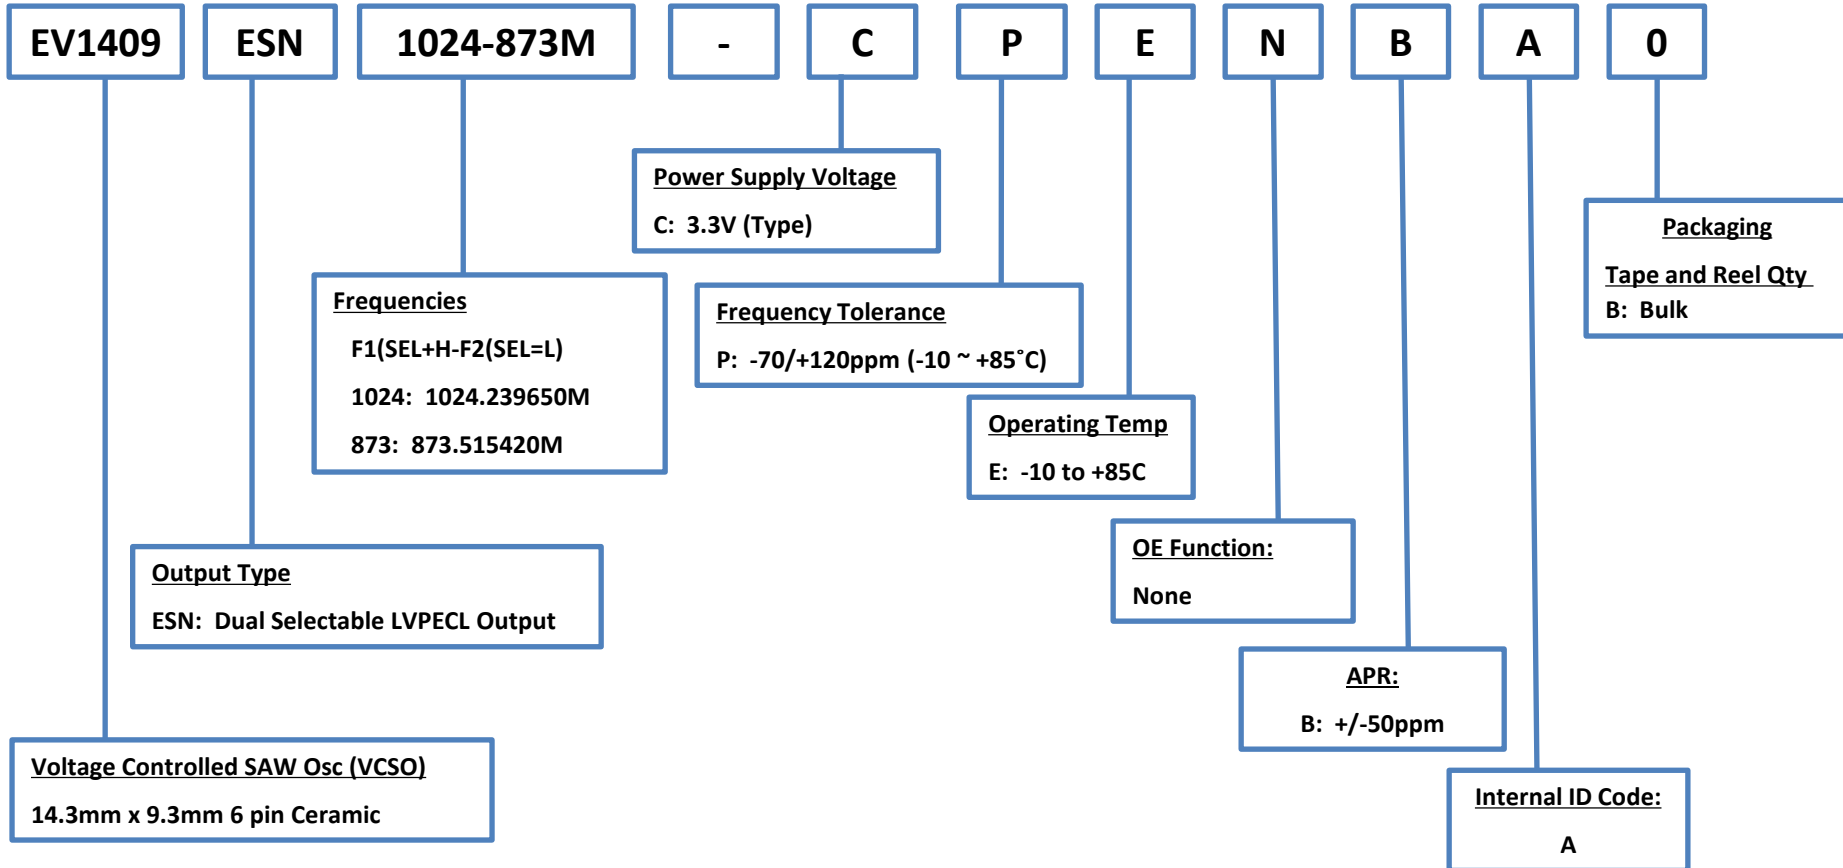

Product Configuration System



Oscillators - VCISO

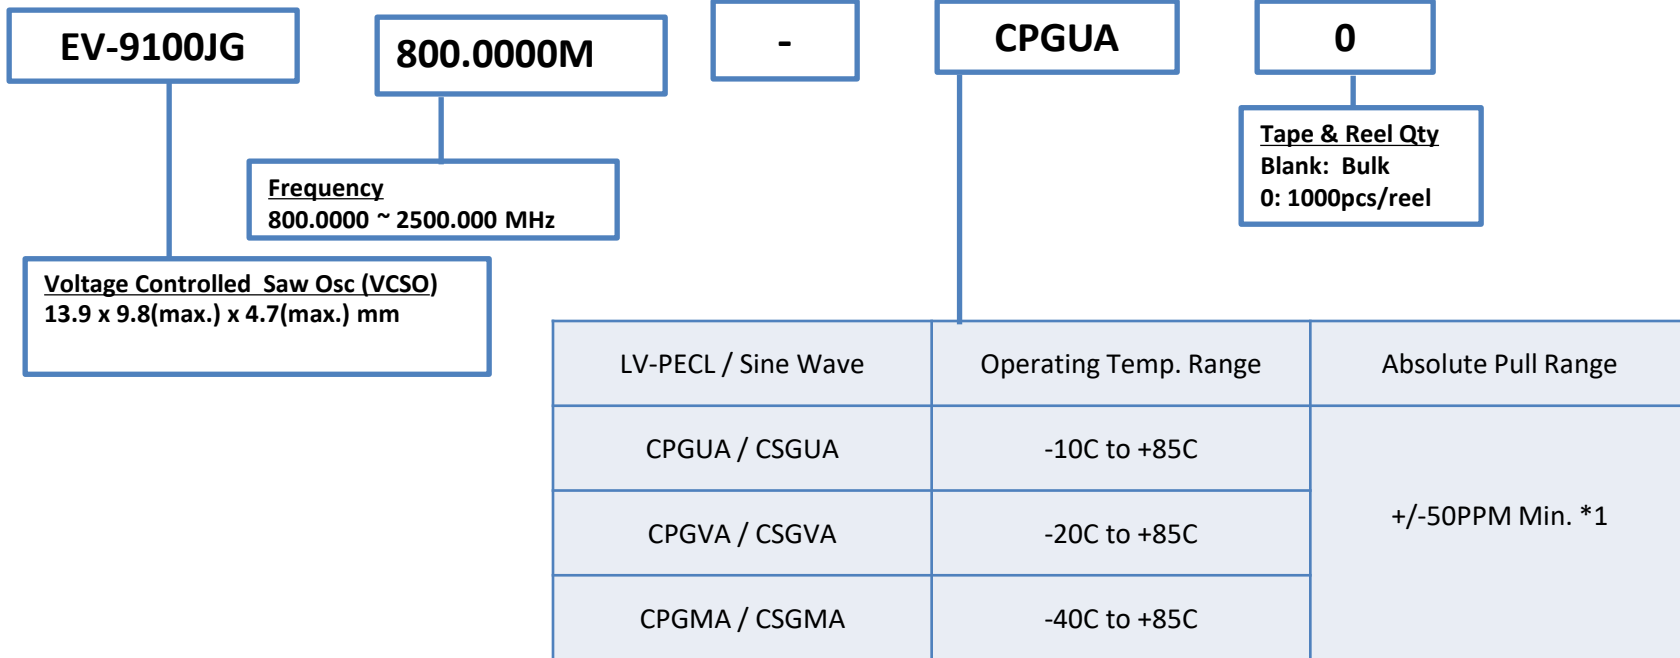


***1 NOTE:** Absolute Pull Range = Frequency Control Range – Frequency Tolerance



Product Configuration System

Oscillators - VCXO

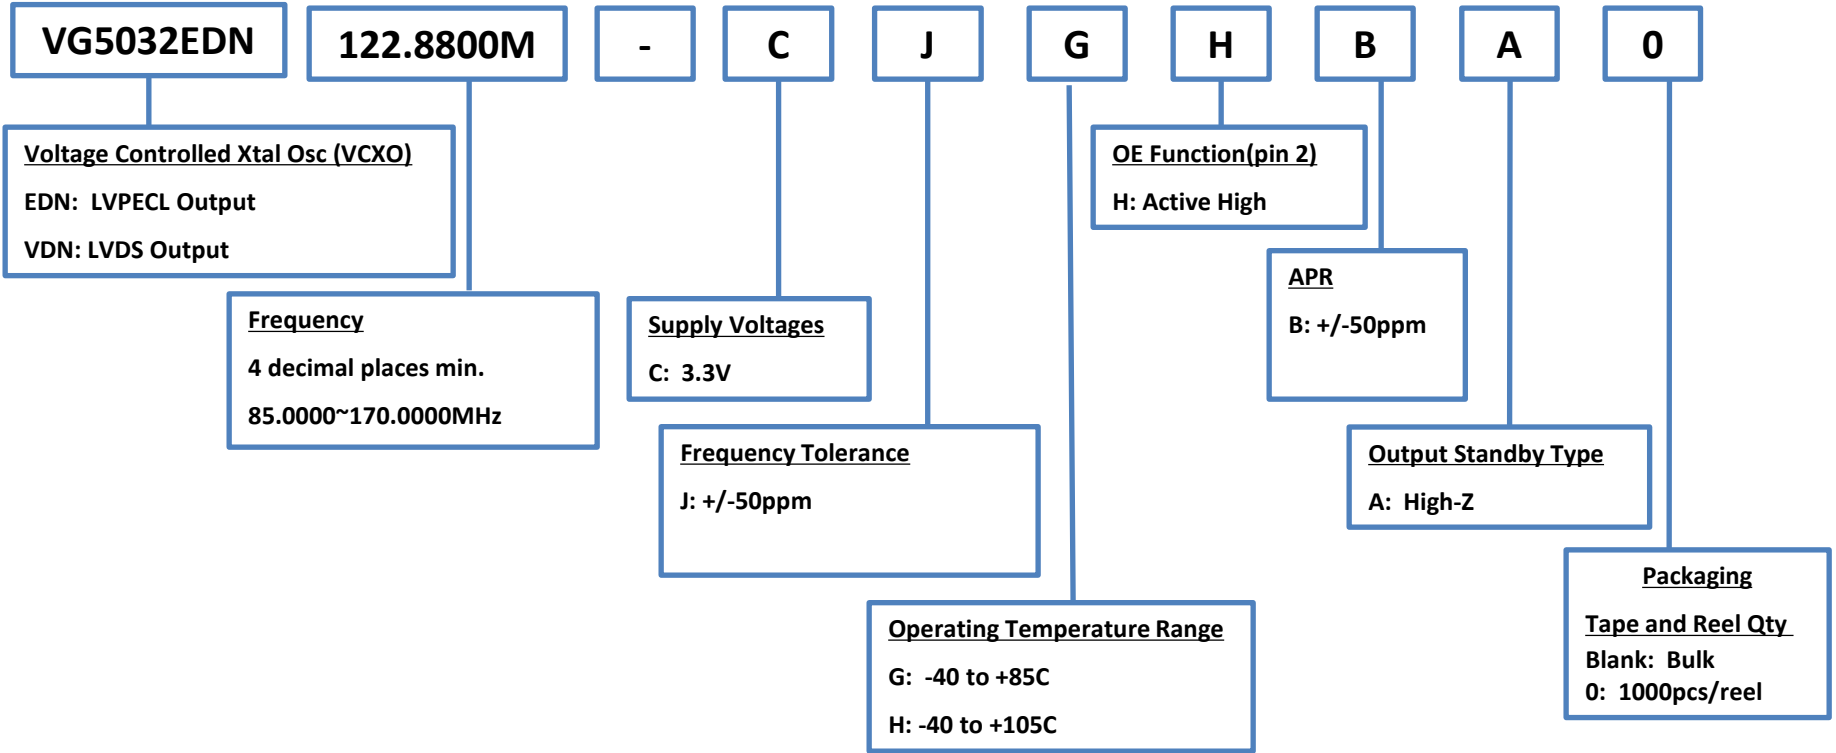

NOTE:

Standard Frequencies Offered: 122.88M


Please contact us for requirements not listed in this specification.



Product Configuration System

Oscillators - VCXO


Discontinued

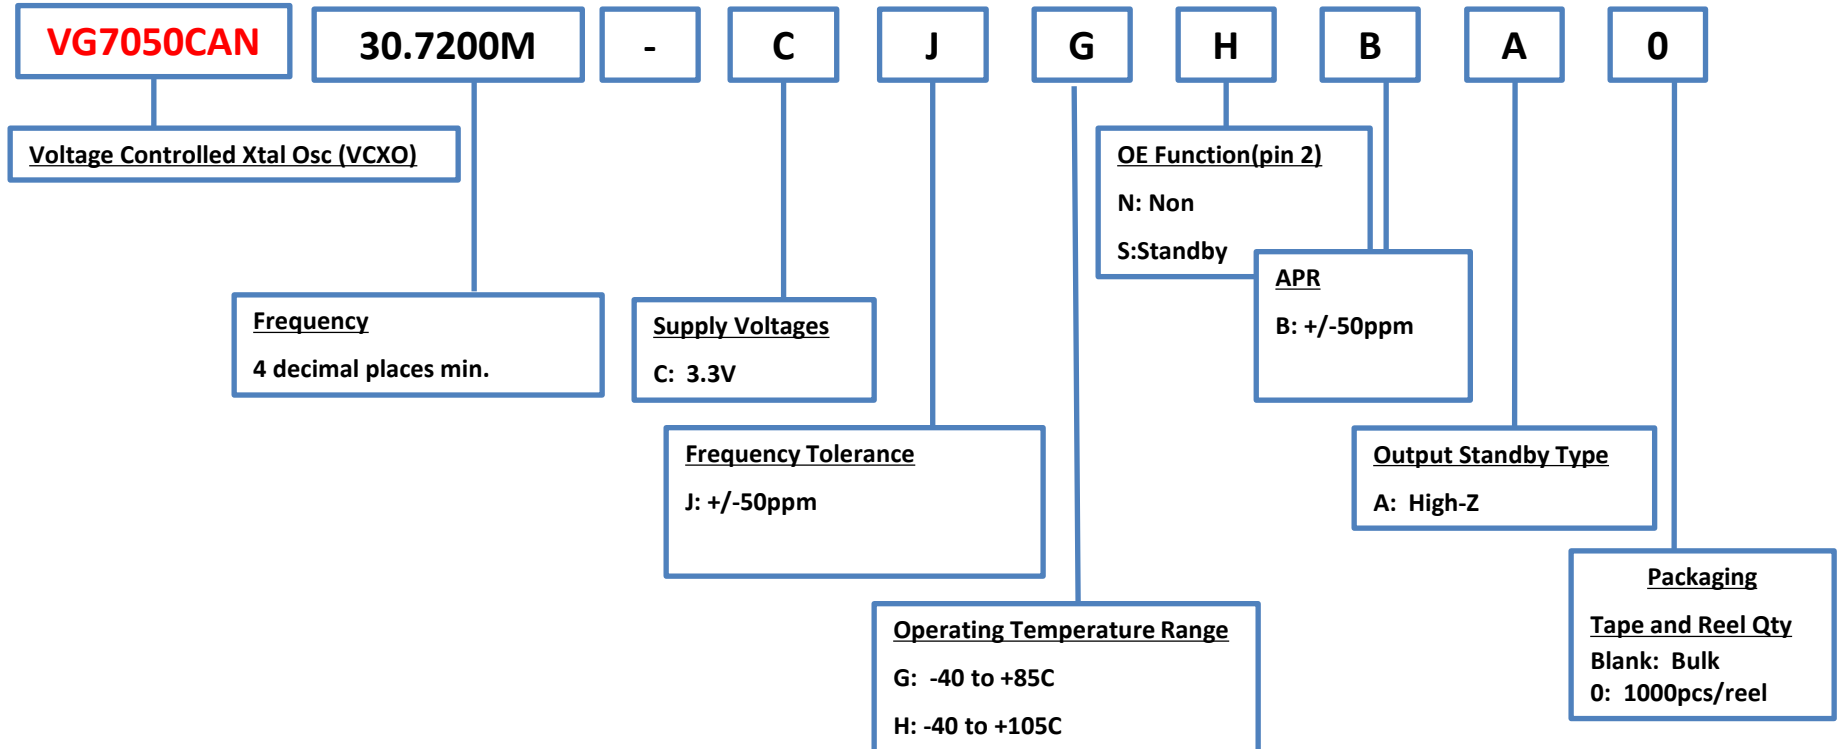

Product Configuration System

Oscillators - VCXO


Discontinued

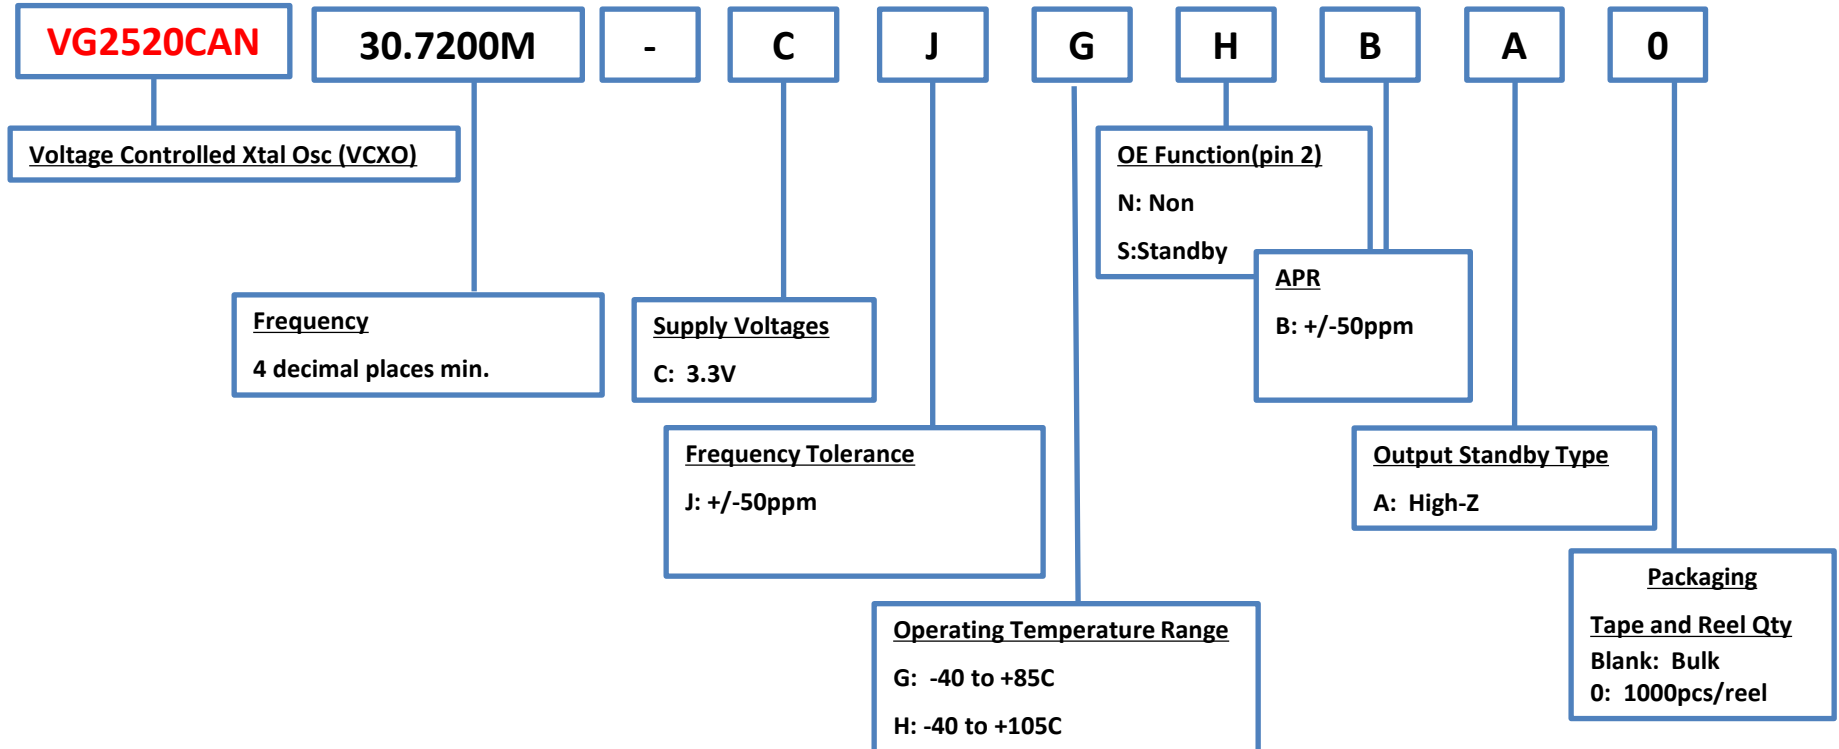

Product Configuration System



Programmable Voltage Controlled Oscillator (VCXO)

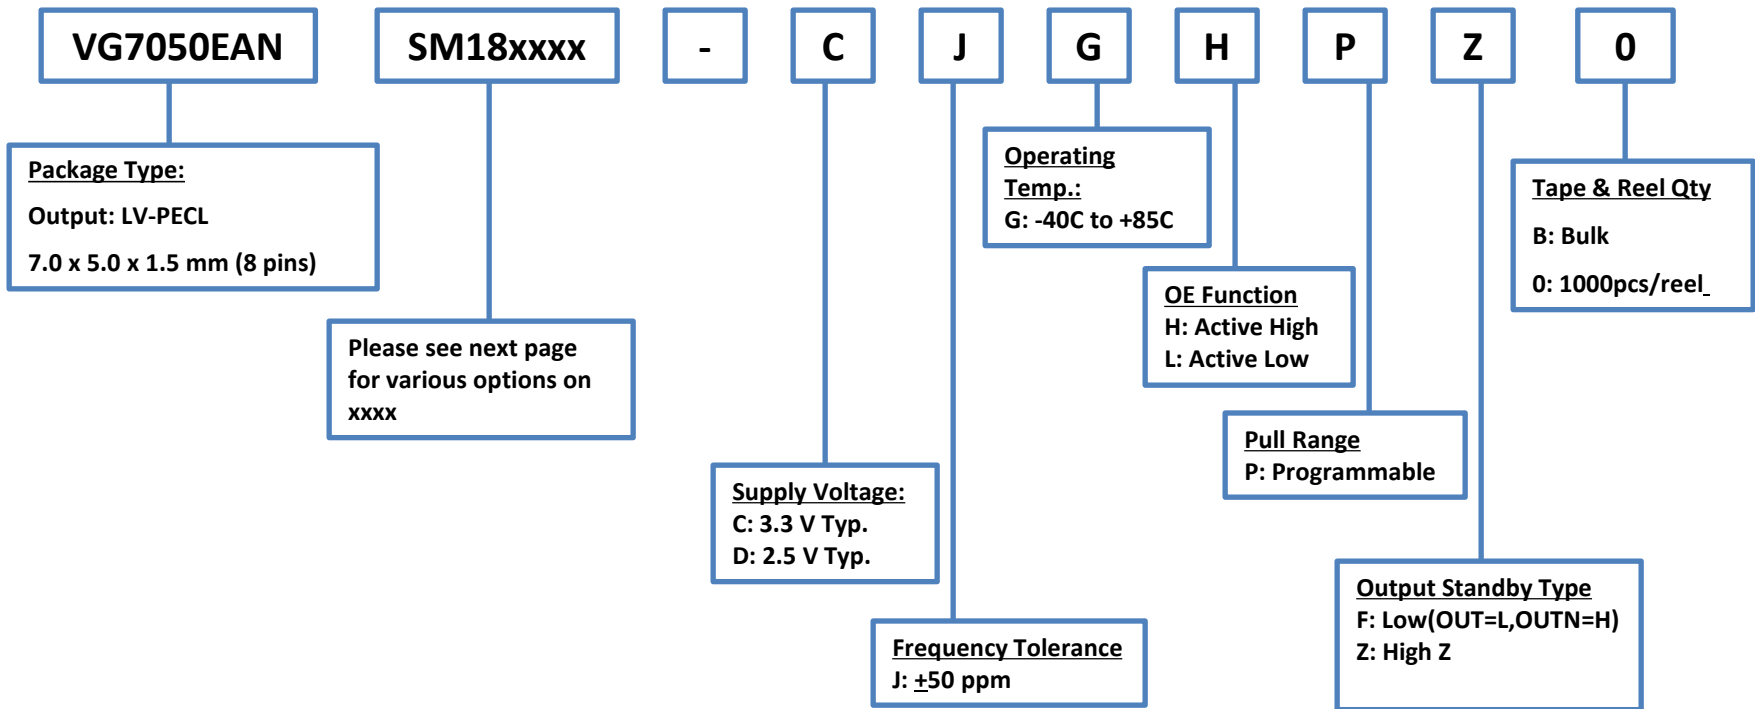

NOTE:

Frequency Range: 50~800MHz

Please contact us for requirements not listed in this specification.

Product Configuration System



Programmable Voltage Controlled Oscillator (VCXO)

VG7050EAN

Part Number	Start-up frequency [MHz]	APR			Supply Voltage	OE function	Output Standby Type					
		Max	Initial	Vc range								
VG7050EAN-SM18T001-CJGHPZ	622.080000	180	100	1.65+/-1.25	3.3V	Active high	Hi-Z					
VG7050EAN-SM18T002-DJGHPZ				1.25+/-1.00	2.5V							
VG7050EAN-SM18T003-CJGLPZ				1.65+/-1.35	3.3V	Active low						
VG7050EAN-SM18T004-DJGLPZ				1.25+/-1.00	2.5V							
VG7050EAN-SM18T005-CJGHPF				1.65+/-1.35	3.3V	Active high		Low (OUT=L,OUTN=H)				
VG7050EAN-SM18T006-DJGHPF				1.25+/-1.00	2.5V							
VG7050EAN-SM18T007-CJGLPF				1.65+/-1.35	3.3V	Active low						
VG7050EAN-SM18T008-DJGLPF				1.25+/-1.00	2.5V							
VG7050EAN-SM18T009-CJGHPZ				156.250000	180	100			1.65+/-1.25	3.3V	Active high	Hi-Z
VG7050EAN-SM18T010-DJGHPZ									1.25+/-1.00	2.5V		


-If customer wants startup frequency other than 622.08MHz or 156.25MHz, please contact us for a custom part.

-Customer can always change the output frequency with the I2C (from 50MHz to 800MHz)

Product Configuration System



Programmable Voltage Controlled Oscillator (VCXO)

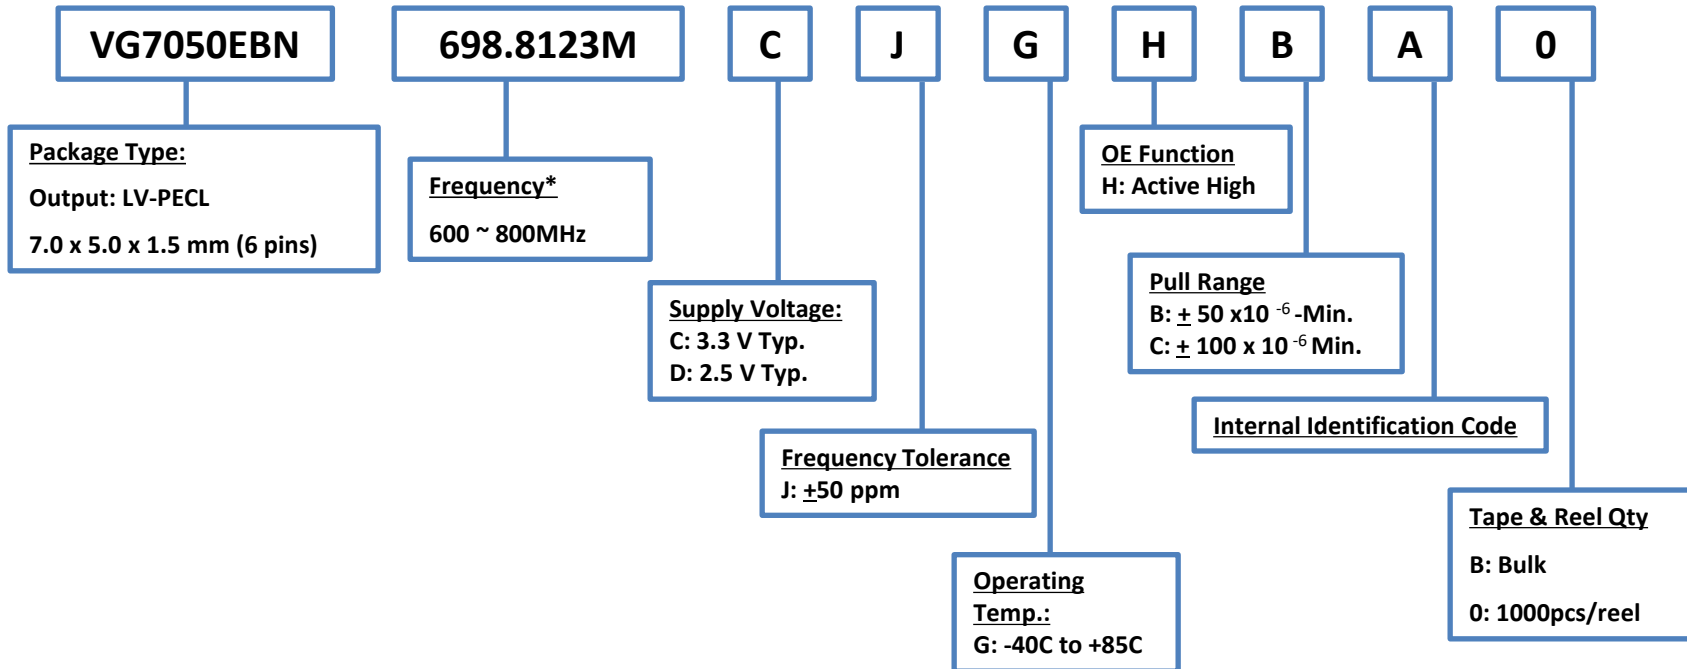

NOTE:


Standard Frequencies: 698.8123MHz, 753.6211MHz, 794.7278MHz

Please contact us for requirements not listed in this specification.

Product Configuration System



Programmable Voltage Controlled Oscillator (VCXO)

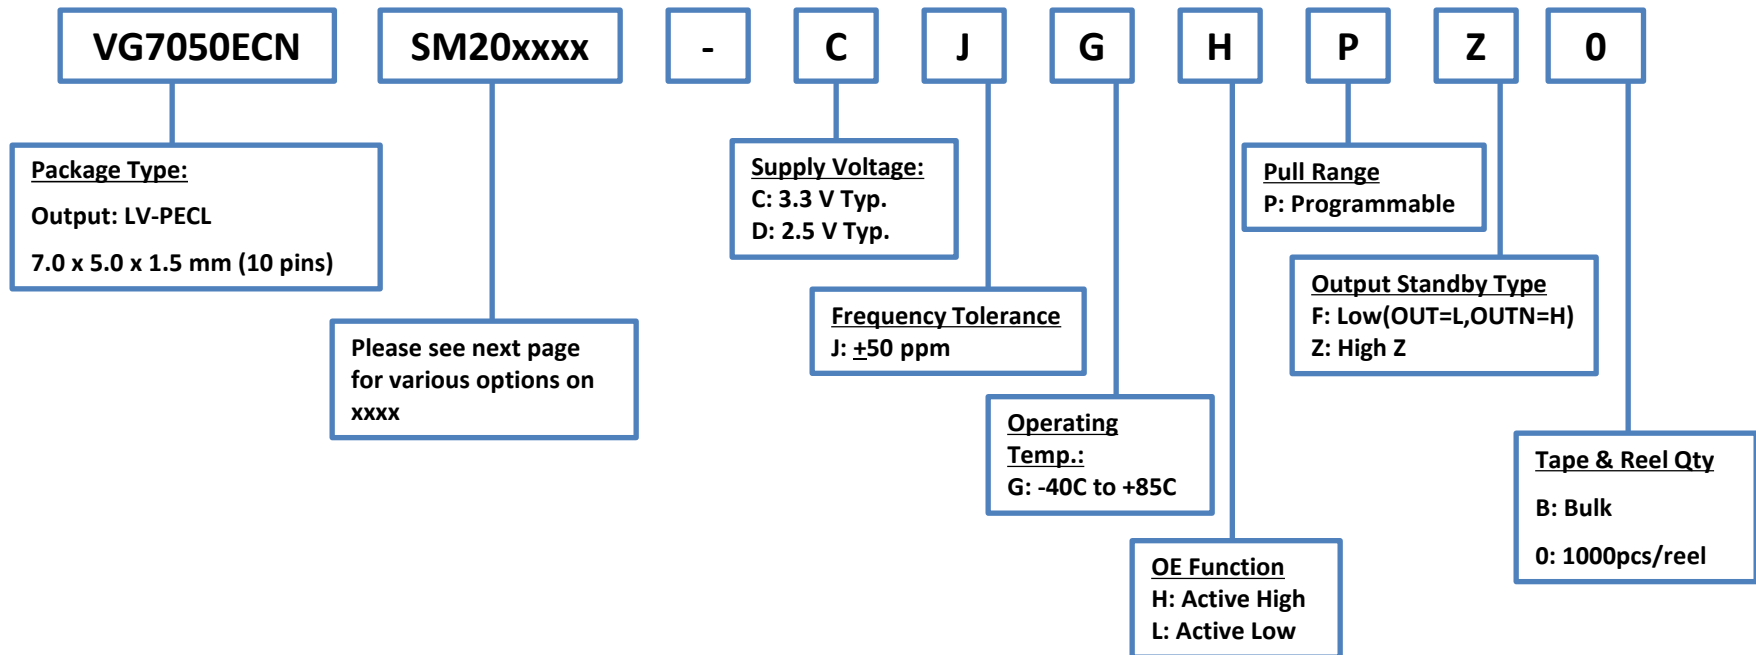

NOTE:

Frequency Range: 50~800MHz

Please contact us for requirements not listed in this specification.

Product Configuration System



Programmable Voltage Controlled Oscillator (VCXO)

VG7050ECN

Part Number	Start-up frequency [MHz]				APR			Supply Voltage	OE function	Output	
	frequency 1	frequency 2	frequency 3	frequency 4	Max	Initial	Vc range			Standby	Type
VG7050ECN-SM20T001-CJGHPZ	622.080000	644.531250	669.326582	693.482991	180	100	1.65+/-1.25	3.3V	Active high	Hi-Z	
VG7050ECN-SM20T002-DJGHPZ							1.25+/-1.00	2.5V			
VG7050ECN-SM20T003-CJGLPZ							1.65+/-1.35	3.3V	Active low		
VG7050ECN-SM20T004-DJGLPZ							1.25+/-1.00	2.5V			
VG7050ECN-SM20T005-CJGHPP							1.65+/-1.35	3.3V	Active high		Low (OUT=L,OUTN=H)
VG7050ECN-SM20T006-DJGHPP							1.25+/-1.00	2.5V			
VG7050ECN-SM20T007-CJGLPF							1.65+/-1.35	3.3V	Active low		
VG7050ECN-SM20T008-DJGLPF							1.25+/-1.00	2.5V			

-If customer wants different startup frequencies, please contact us for a custom part.

-Customer can always change the output frequencies with the I2C (from 50MHz to 800MHz)

Product Configuration Guide


SENSING DEVICES



Product Configuration System




Gyro Sensor – Digital Output

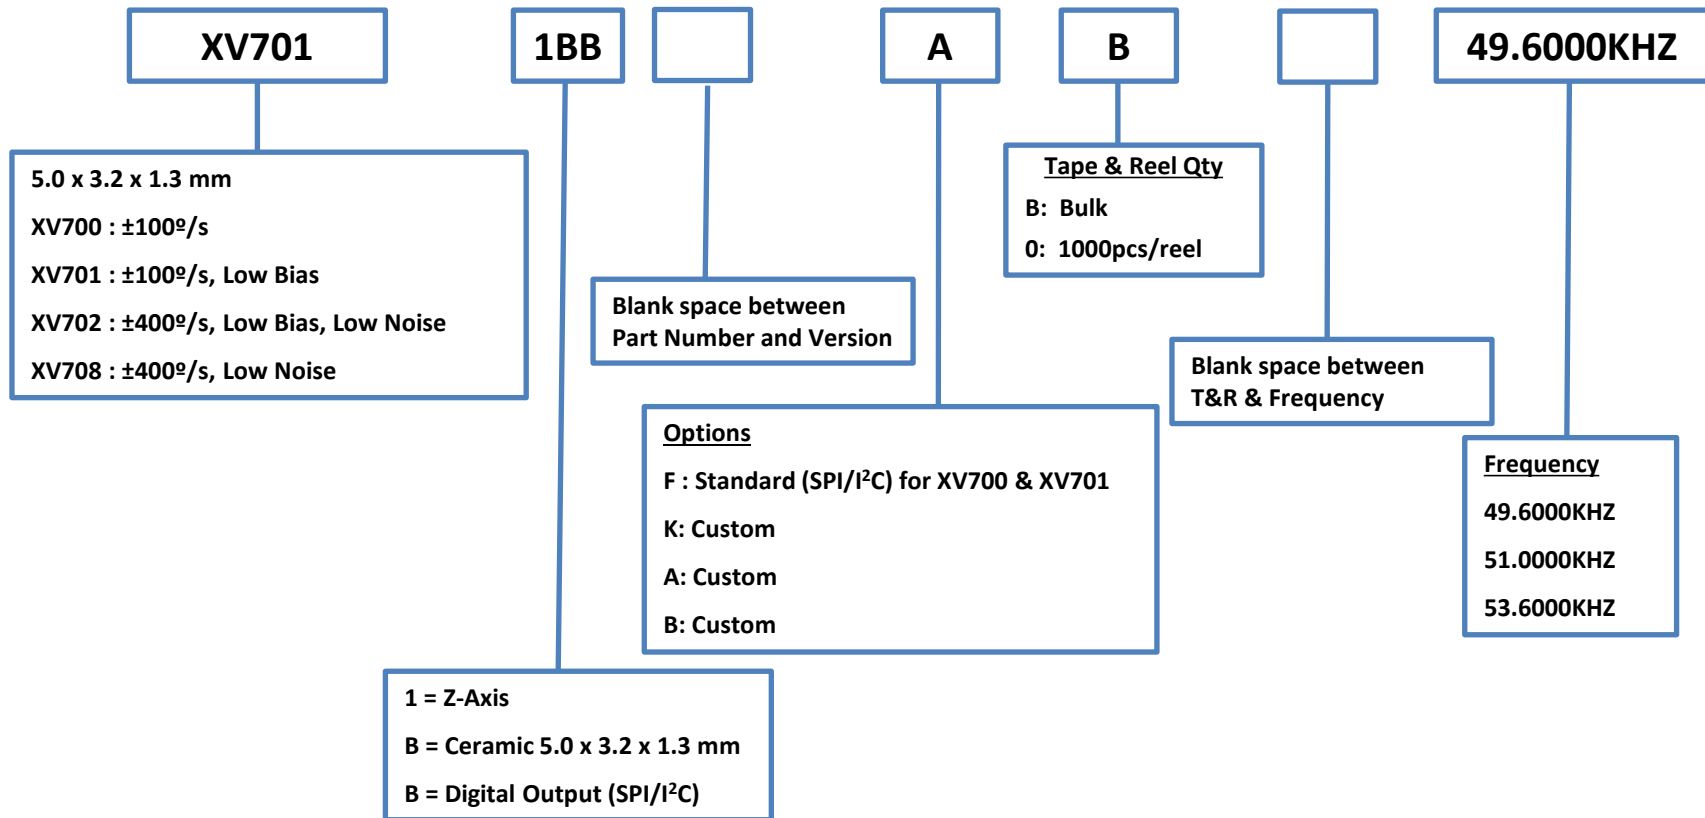

Product Configuration System



Gyro Sensor – Analog Output

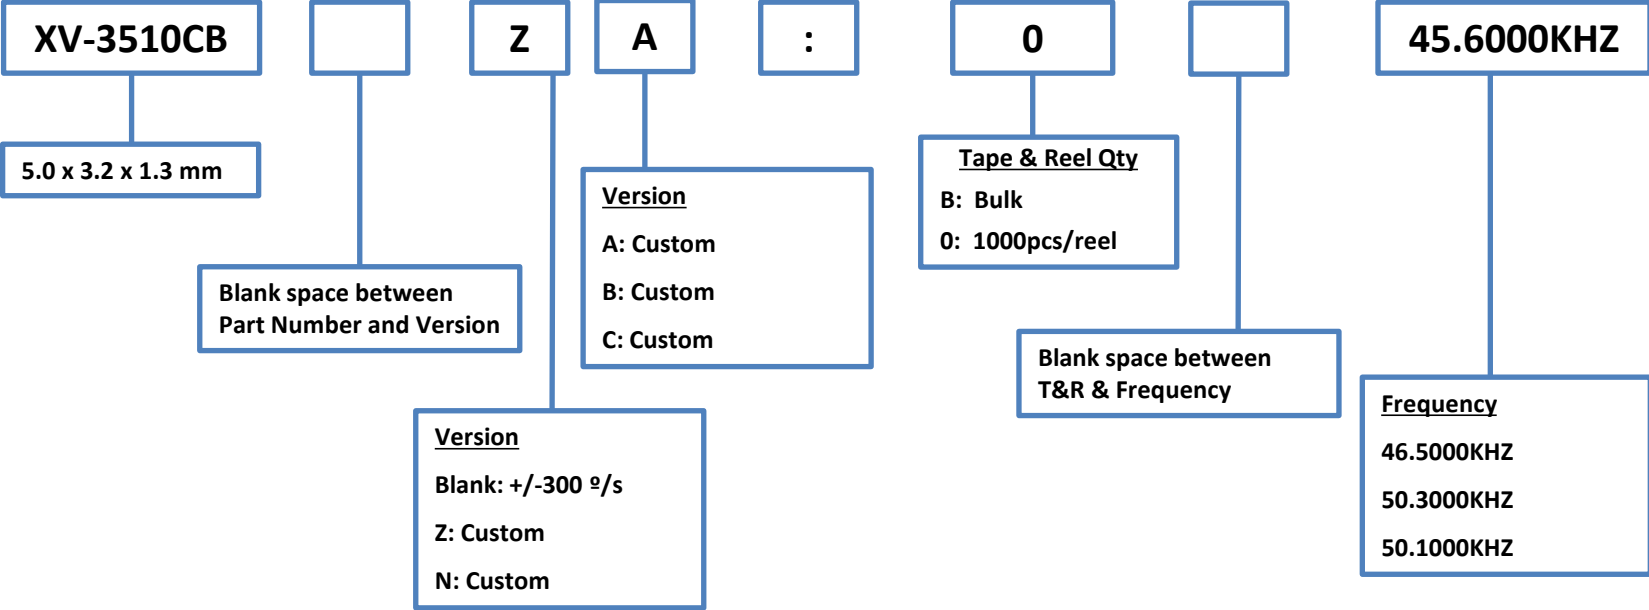


Product Configuration System



Gyro Sensor – Analog Output

Discontinued

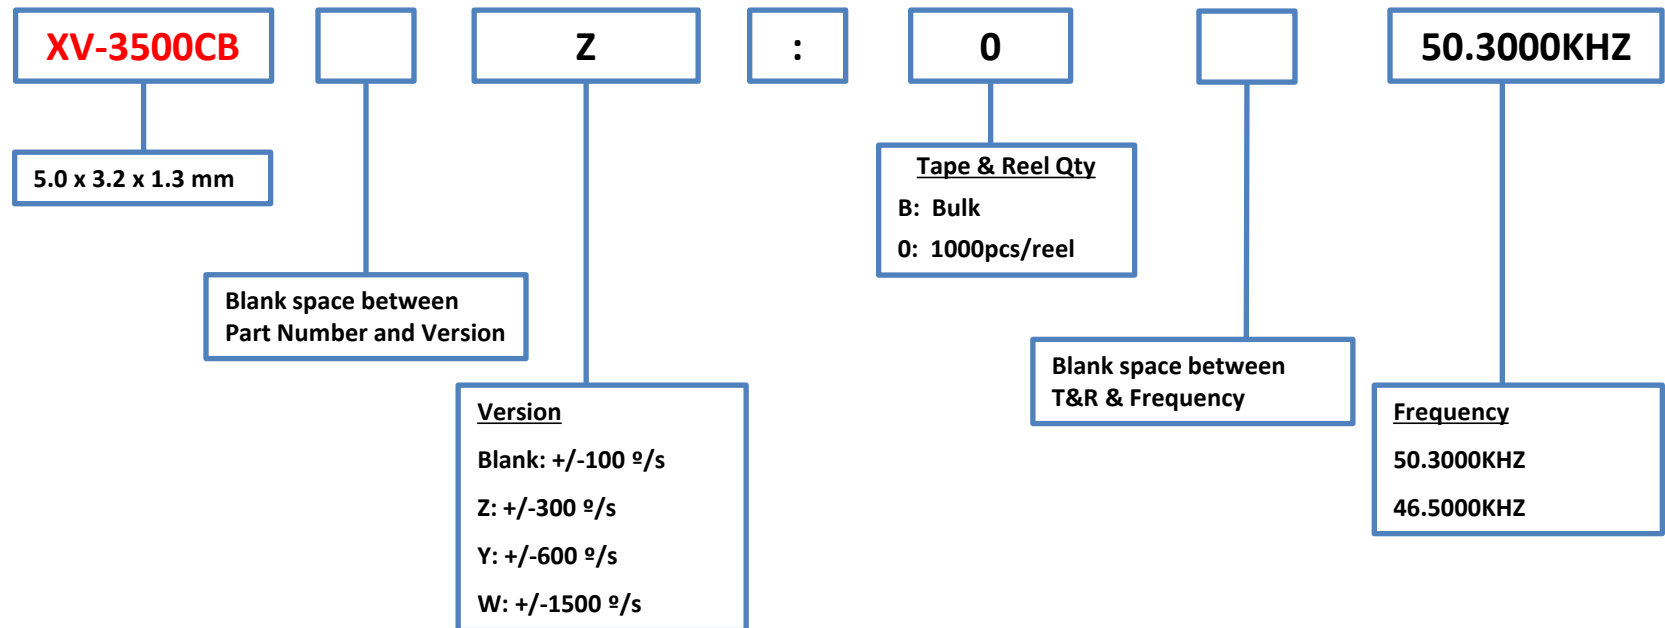


Product Configuration System





Gyro Sensor – Analog Output

Discontinued

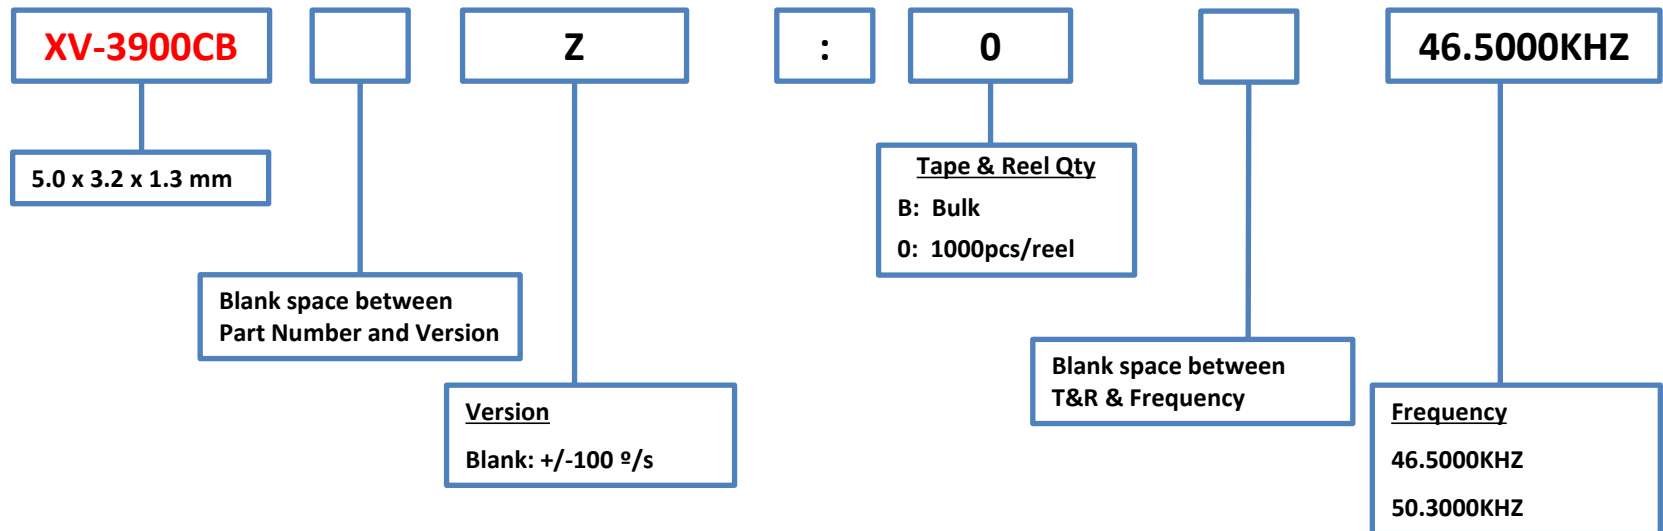

Product Configuration Guide


REAL TIME CLOCKS



Product Configuration System



Real Time Clock Modules – I²C-Bus

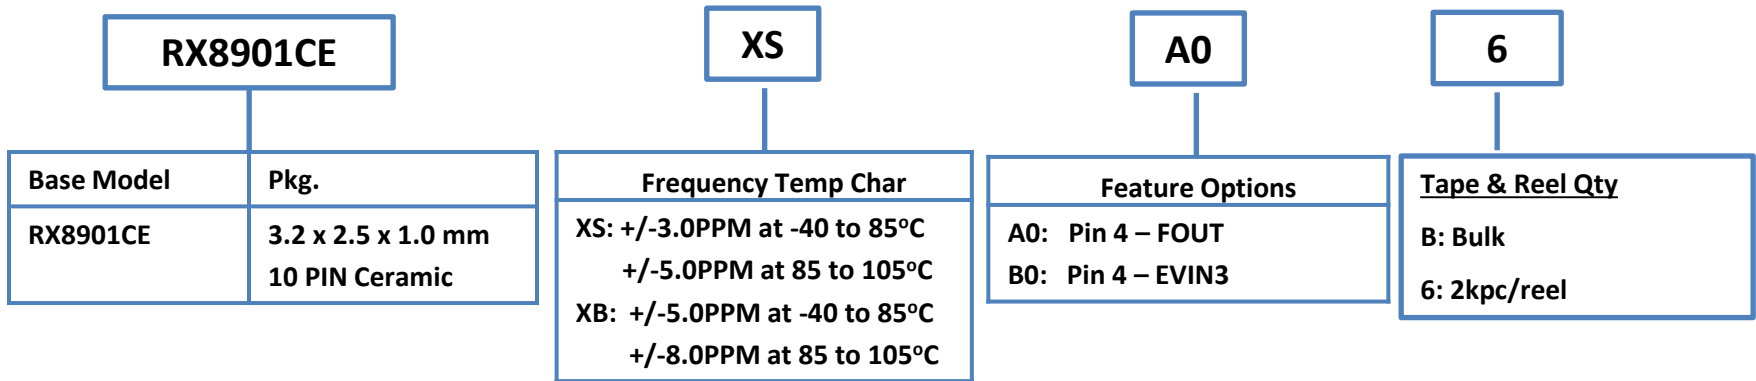

Examples:

RX8901CE XB A06

RX8901CE XS B06


NOTE:

Please contact us for requirements not listed in this specification.

Product Configuration System



Real Time Clock Modules – SPI-Bus

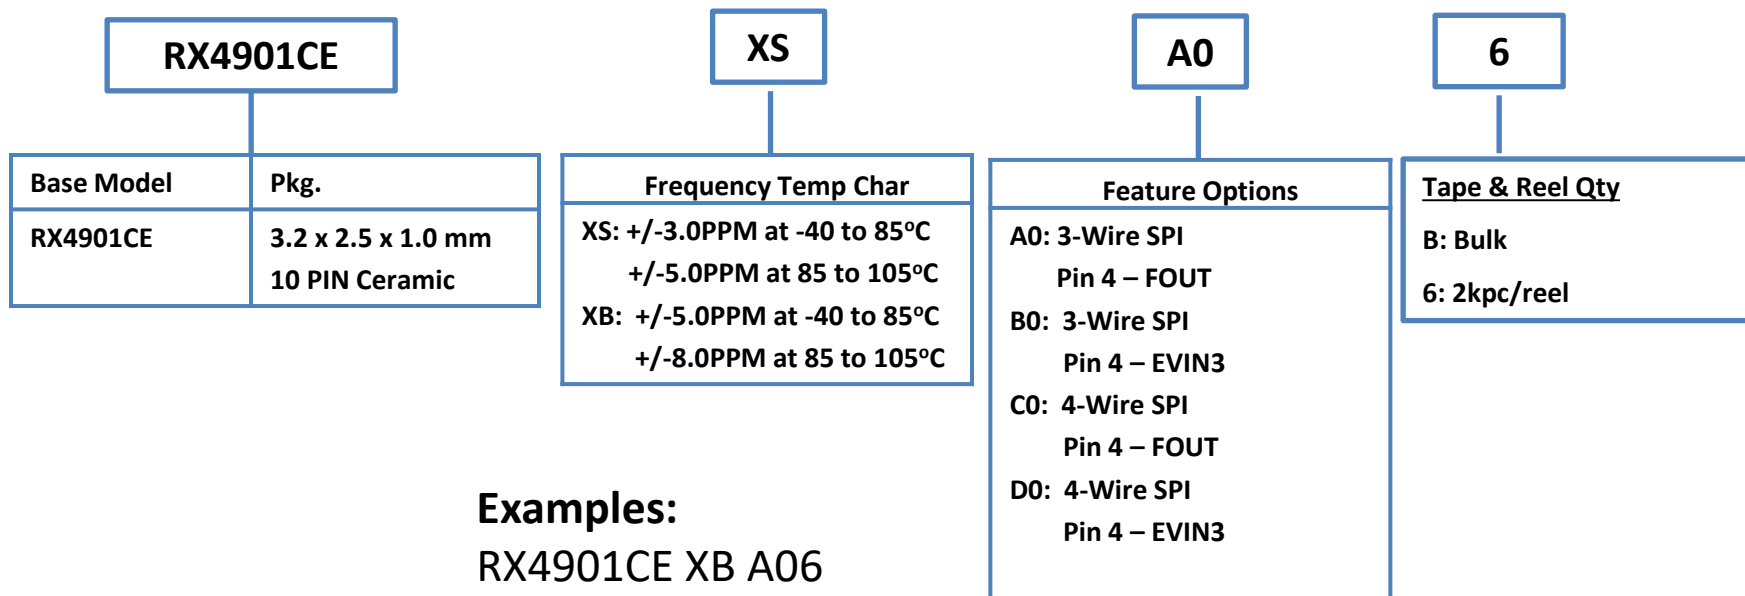


Examples:
 RX4901CE XB A06
 RX4901CE XS B06

NOTE:
 Please contact us for requirements not listed in this specification.

Product Configuration System



Real Time Clock Modules – I²C-Bus, Automotive (AEC-Q100)

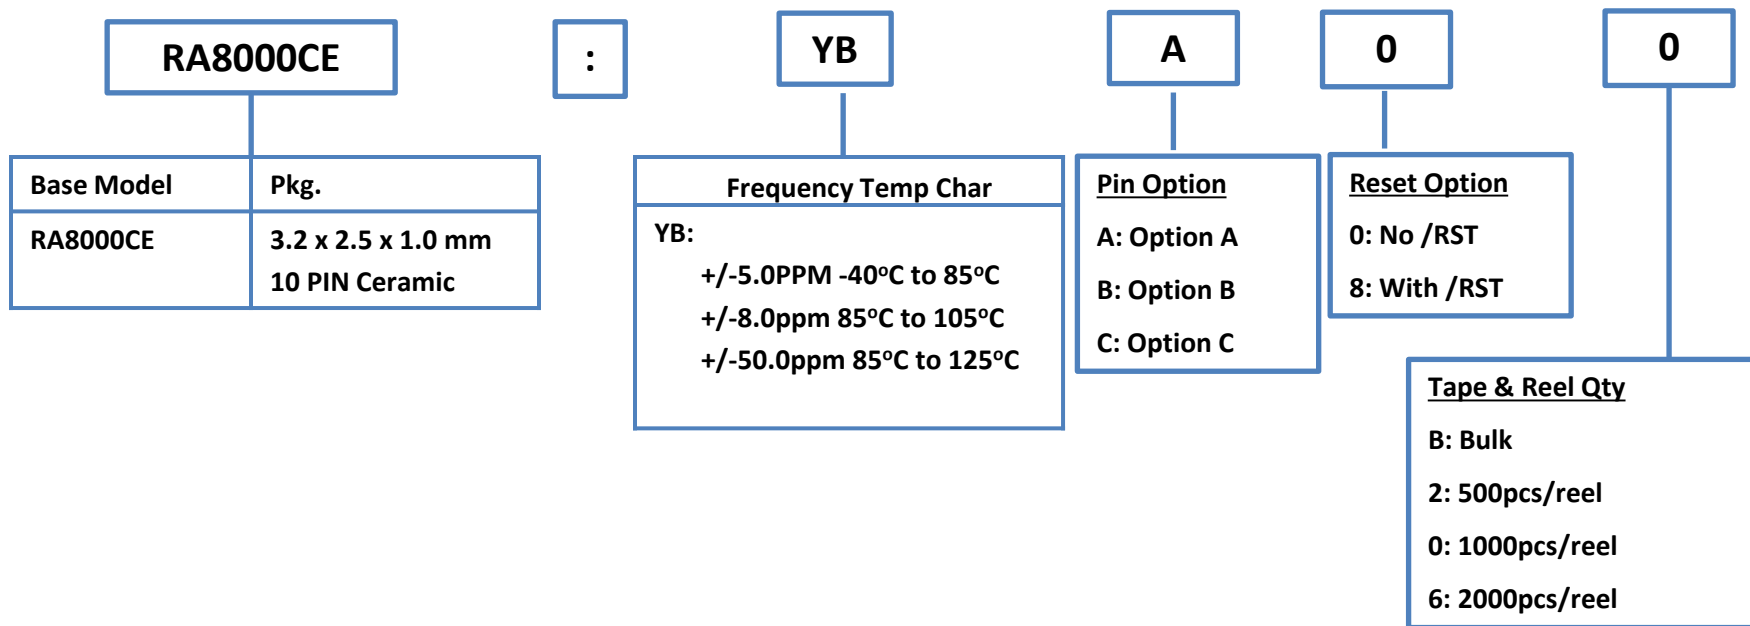

Automotive Grade product
Approved Customer & Application only
Contact your Epson rep. for support




NOTE:

Please contact us for requirements not listed in this specification. Refer to DS for Pin and Reset options

Product Configuration System



Real Time Clock Modules – SPI-Bus, Automotive (AEC-Q100)

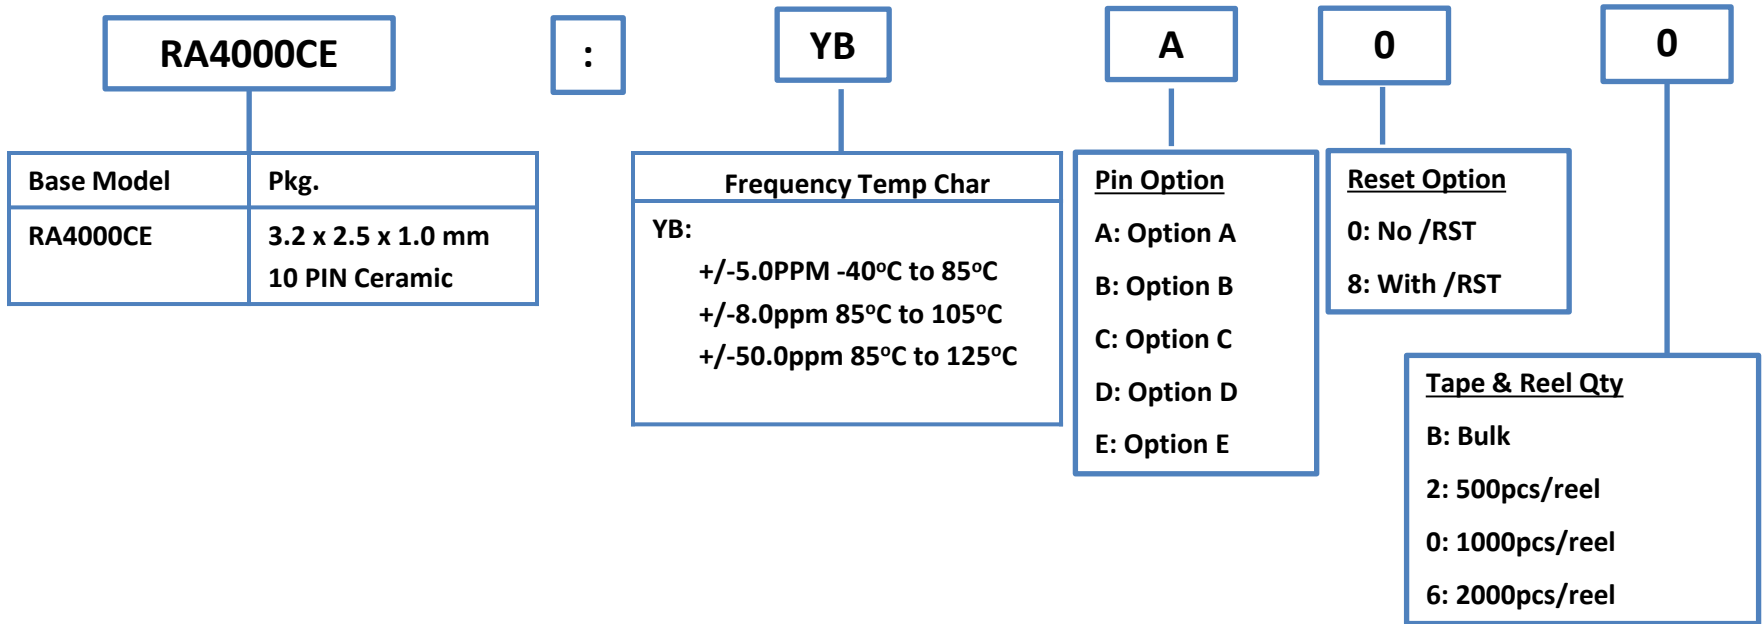

**Automotive Grade product
Approved Customer & Application only
Contact your Epson rep. for support**

EPSON

August 2024


NOTE:

Please contact us for requirements not listed in this specification. Refer to DS for Pin and Reset options

Product Configuration System



Real Time Clock Modules – I²C-Bus

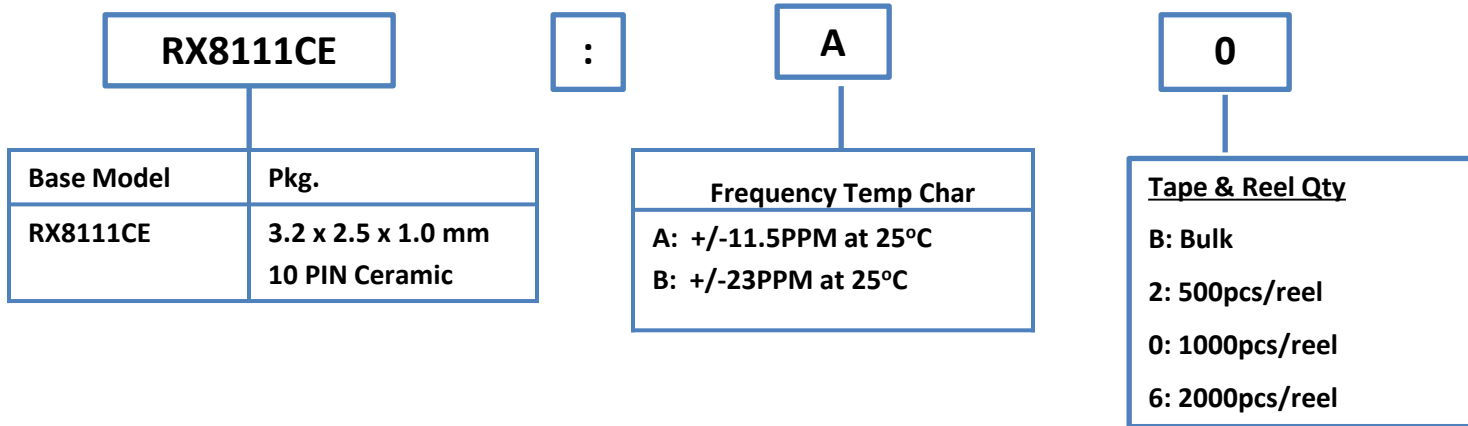


NOTE:

Please contact us for requirements not listed in this specification.

Product Configuration System



Real Time Clock Modules – SPI

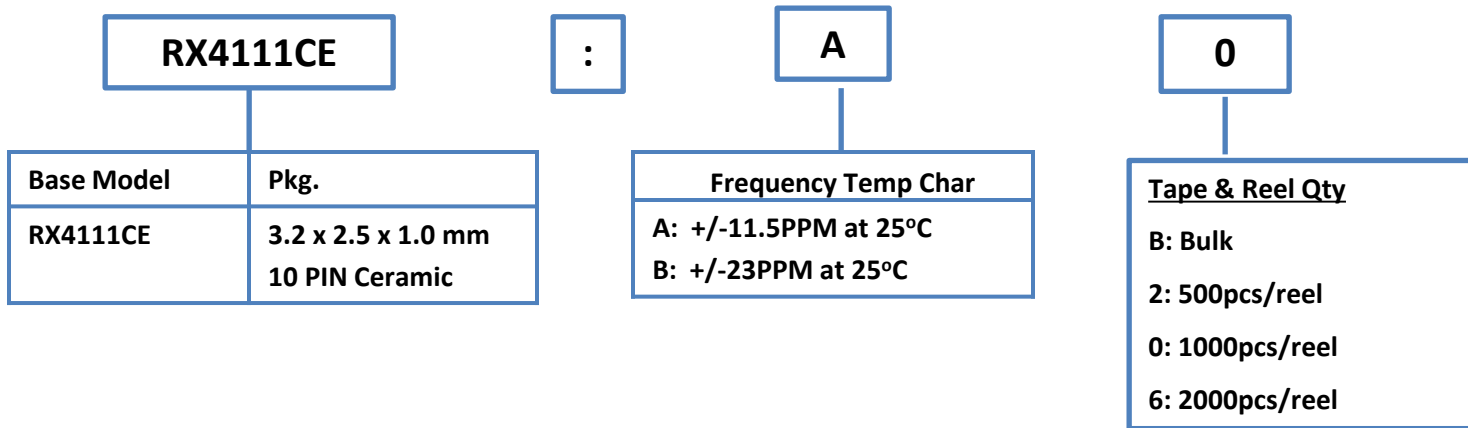


NOTE:

Please contact us for requirements not listed in this specification.

Product Configuration System



Real Time Clock Modules – I²C-Bus

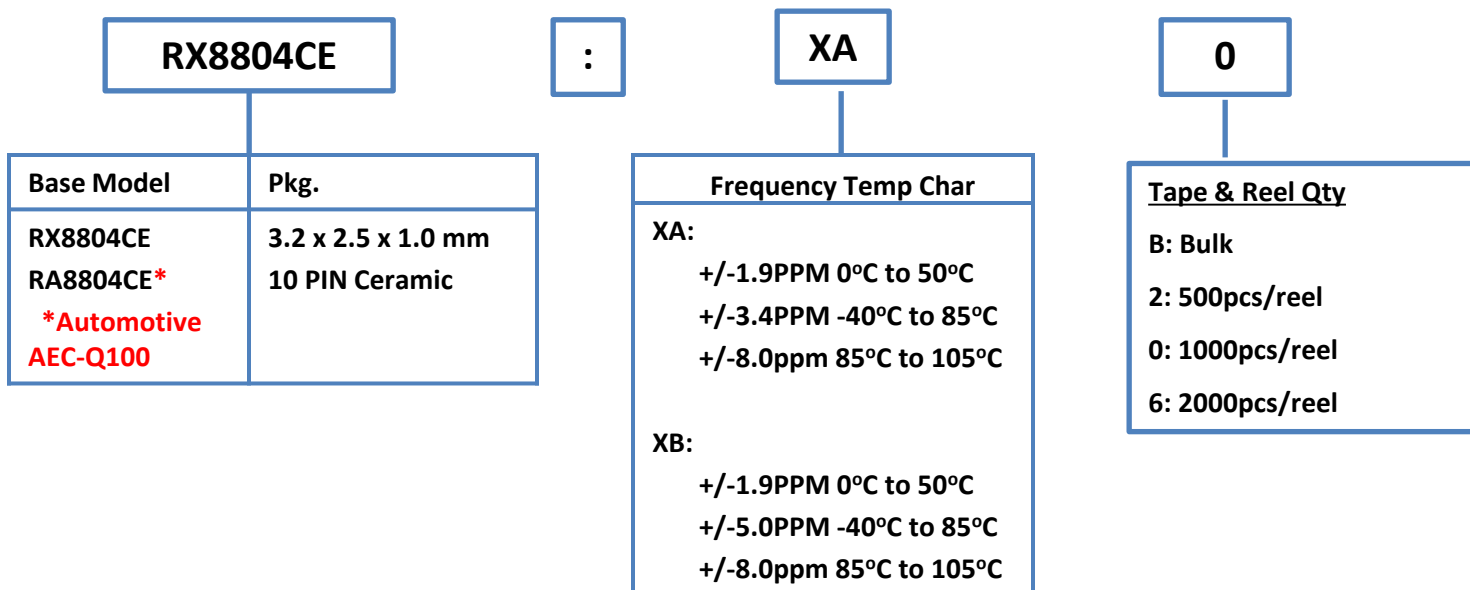

***Automotive Grade product
Approved Customer & Application only
Contact your Epson rep. for support**




NOTE:

Please contact us for requirements not listed in this specification.

Product Configuration System




Real Time Clock Modules – I²C-Bus

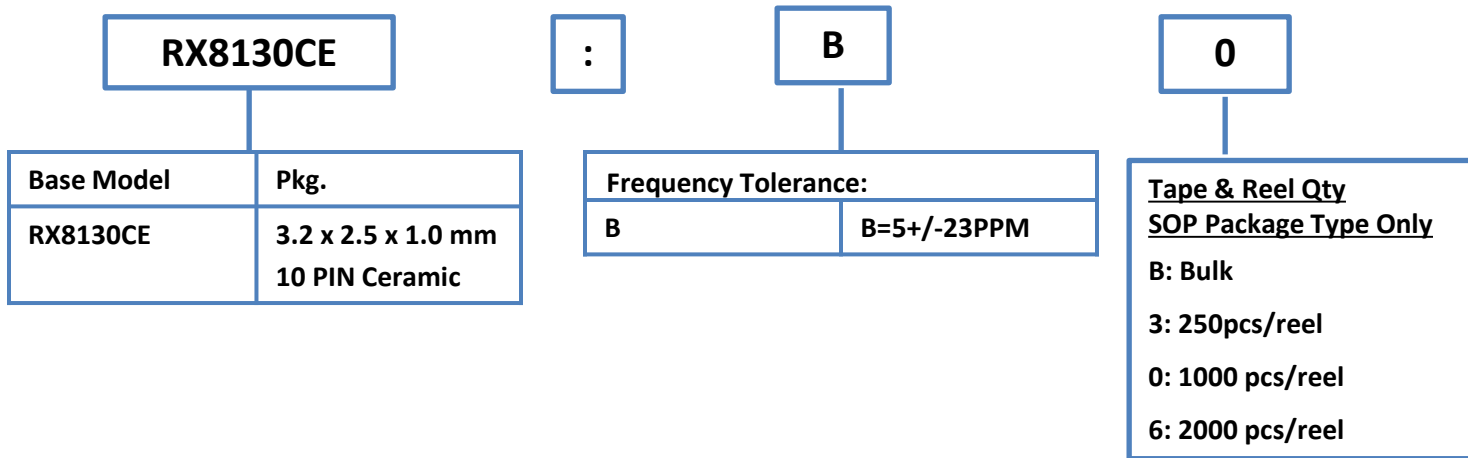

Product Configuration System



Real Time Clock Modules – Serial (3 Wire & 4 Wire)

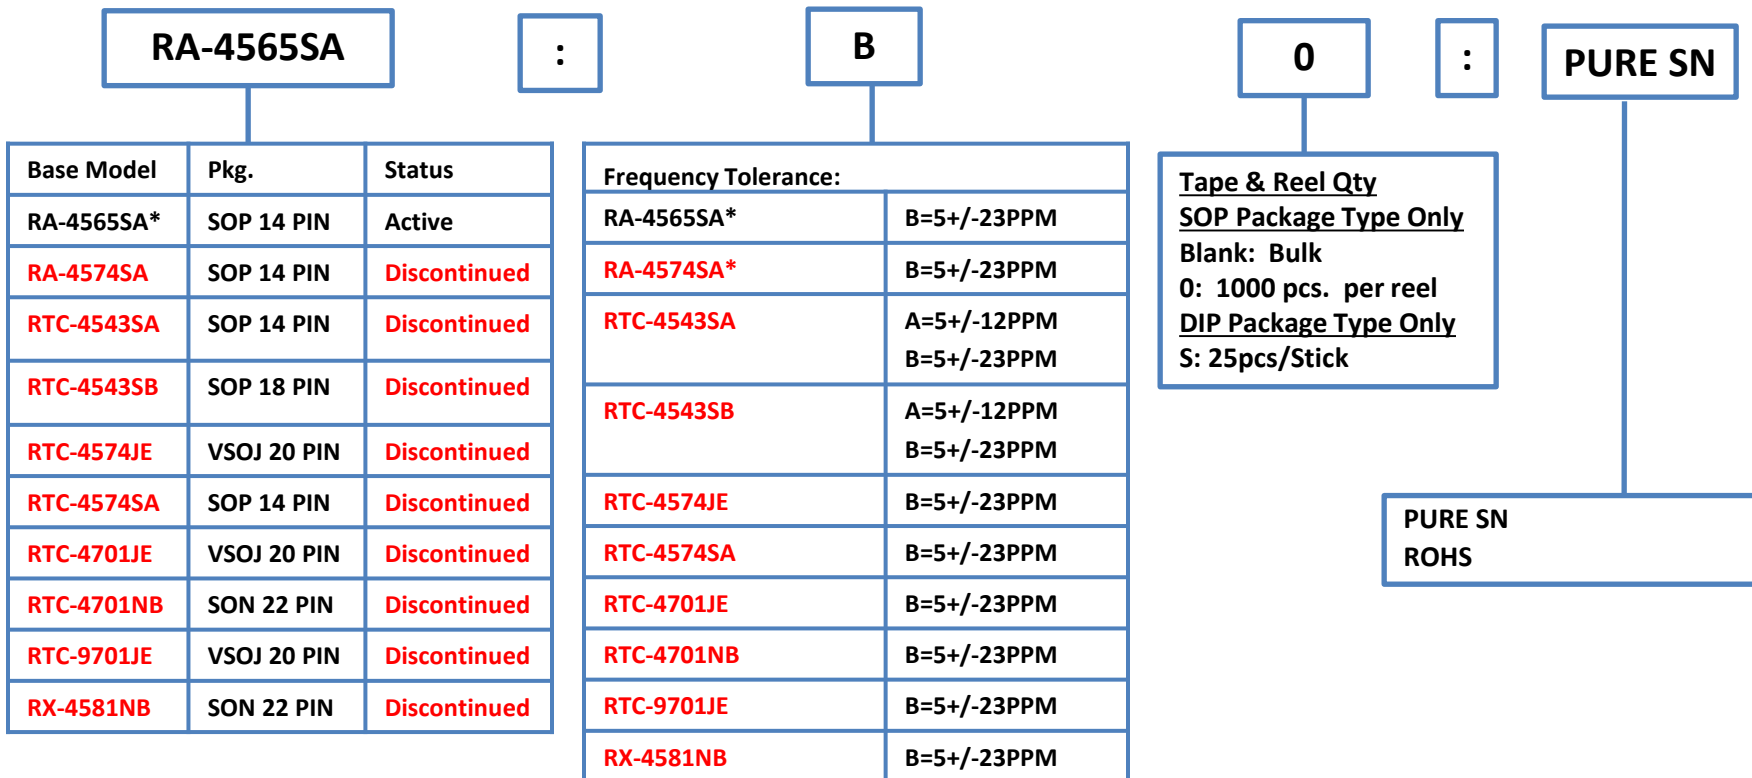

Automotive Grade product
Approved Customer & Application only
Contact your Epson rep. for support



Note:
 SA packages in "PURE SN" is **DISCONTINUED** but "RoHS " is ACTIVE.
 Model P/N in RED font = **DISCONTINUED**
 *Automotive AEC-Q200

Product Configuration System



Real Time Clock Modules – Serial (3 Wire & 4 Wire)

RX-4571SA

:

B

0

:

PURE SN

Base Model	Pkg.	Status
RTC-4574NB	SON 22 PIN	Discontinued
RX-4045NB	SON 22 PIN	Active
RX-4045SA	SOP 14 PIN	Active
RX-4574LC	VSOJ 12 PIN	Discontinued
RX-4575LC	VSOJ 12 PIN	Discontinued
RX-4571LC	VSOJ 12 PIN	Active
RX-4571NB	SON 22 PIN	Active
RX-4571SA	SOP 14 PIN	Active
RX-4801SA	SOP 14 PIN	Discontinued
RX-4803SA	SOP 14 PIN	Active
RX-4803LC	VSOJ 12 PIN	Active

Frequency Tolerance (Ta =+25 °C):	
RTC-4574NB	B=5+/-23PPM
RX-4045NB, RX-4045SA	AA=5+/-5PPM AC=0+/-5PPM
RX-4574LC	B=5+/-23PPM
RX-4575LC	B=5+/-23PPM
RX-4571LC	B=5+/-23PPM
RX-4571NB	B=5+/-23PPM
RX-4571SA	B=5+/-23PPM
RX-4801SA	Over -40 to +85 °C UB=+/-5PPM
RX-4803SA, RX-4803LC	Over -40 to +85 °C UA=+/-3.4PPM UB=+/-5PPM

Tape & Reel Qty
SOP Package Type Only
 Blank: Bulk
 0: 1000 pcs. per reel
DIP Package Type Only
 S: 25pcs/Stick

PURE SN
 Blank : Already RoHS Compliant

Note:
 All LC packages are already RoHS Compliant with "PURE SN".
 LC packages with "PURE SN" are DISCONTINUED
 *RX-4575LC - Sn-Ag Plating NOT PURE SN
 Model P/N in RED font = DISCONTINUED



Product Configuration System



Real Time Clock Modules – I²C-Bus

RX-8571SA

:

B

0

:

PURE SN

Base Model	Pkg.	Status
RA-8565SA*	SOP 14 PIN	Discontinued
RX-8025NB	SON 22 PIN	Active
RX-8025SA	SOP 14 PIN	Active
RX-8564LC	VSOJ 12 PIN	Active
RX-8571SA	SOP 14 PIN	Active
RX-8571NB	SON 22 PIN	Active
RX-8571LC	VSOJ 12 PIN	Active
RX-8581JE	VSOJ 20 PIN	Discontinued
RX-8581NB	SON 22 PIN	Discontinued
RX-8581SA	SON 14 PIN	Discontinued
RX-8731LC	VSOJ 12 PIN	Active

Frequency Tolerance:	
RA-8565SA*	B=5+/-23PPM
RX-8025NB	AA=5+/-5PPM
RX-8025SA	AA=5+/-5PPM
RX-8564LC	B=5+/-23PPM
RX-8571SA	B=5+/-23PPM
RX-8571NB	B=5+/-23PPM
RX-8571LC	B=5+/-23PPM
RX-8581JE	B=5+/-23PPM
RX-8581NB	B=5+/-23PPM
RX-8581SA	B=5+/-23PPM
RX-8731LC	B=5+/-23PPM

Tape & Reel Qty
SOP Package Type Only
 Blank: Bulk
 0: 1000 pcs. per reel
DIP Package Type Only
 S: 25pcs/Stick

PURE SN
 Blank : Already RoHS Compliant

***Automotive Grade product**
Approved Customer & Application only
Contact your Epson rep. for support



Note:

All LC packages are already RoHS Compliant with "PURE SN"
 Model P/N in RED font = DISCONTINUED

*Automotive AEC-Q200

Product Configuration System



Real Time Clock Modules – I²C-Bus

***Automotive Grade product**
Approved Customer & Application only
Contact your Epson rep. for support

RA-8581SA

:

B

0

:

PURE SN

Base Model	Pkg.	Status
RA-8581SA*	SOP 14 PIN	Discontinued
RTC-8564JE	VSOJ 20 PIN	Active
RTC-8564NB	SON 22 PIN	Active
RX8010SJ	SOP 8 PIN	Active
RA4803SA*	SOP 14 PIN	Active
RA8803SA*	SOP 14 PIN	Active
RX8900SA	SOP 14 PIN	Active
RA8900SA*	SOP 14 PIN	Active
RX8900CE	3.2x2.5mm	Active
RA8900CE*	10 PIN Ceramic	Active

Frequency Tolerance:	
RA-8581SA*	B=5+/-23PPM
RTC-8564JE	B=5+/-23PPM
RTC-8564NB	B=5+/-23PPM
RX8010SA	B=5+/-23PPM
RX4803SA RA4803SA* RX8803SA	UA= +/-3.4PPM -40°C to 85°C UB= +/-5.0PPM -40°C to 85°C UC=+/- 5PPM -30°C to 70°C AA=5+/-5PPM 25°C
RX8900SA RA8900SA* and RX8900CE RA8900CE*	UA=+/-3.4PPM -40°C to 85°C UB=+/-5PPM -40°C to 85°C UC=+/-5PPM -30°C to 70°C

Tape & Reel Qty
SOP Package Type Only
 B: Bulk
 0: 1000 pcs. per reel

Blank : CE Package
 RX8010SJ: PURE SN
 RA4803SA: PURE SN
 RX8803SA: PURE SN
 RX8900SA: PURE SN
 RA-8581SA: ROHS or PURE SN
 RTC-8564JE: ROHS
 RTC-8564NB: ROHS or PURE SN

Note:

Model P/N in RED font = DISCONTINUED

*Automotive AEC-Q200




Product Configuration System



Real Time Clocks – Parallel 4-bit

Discontinued

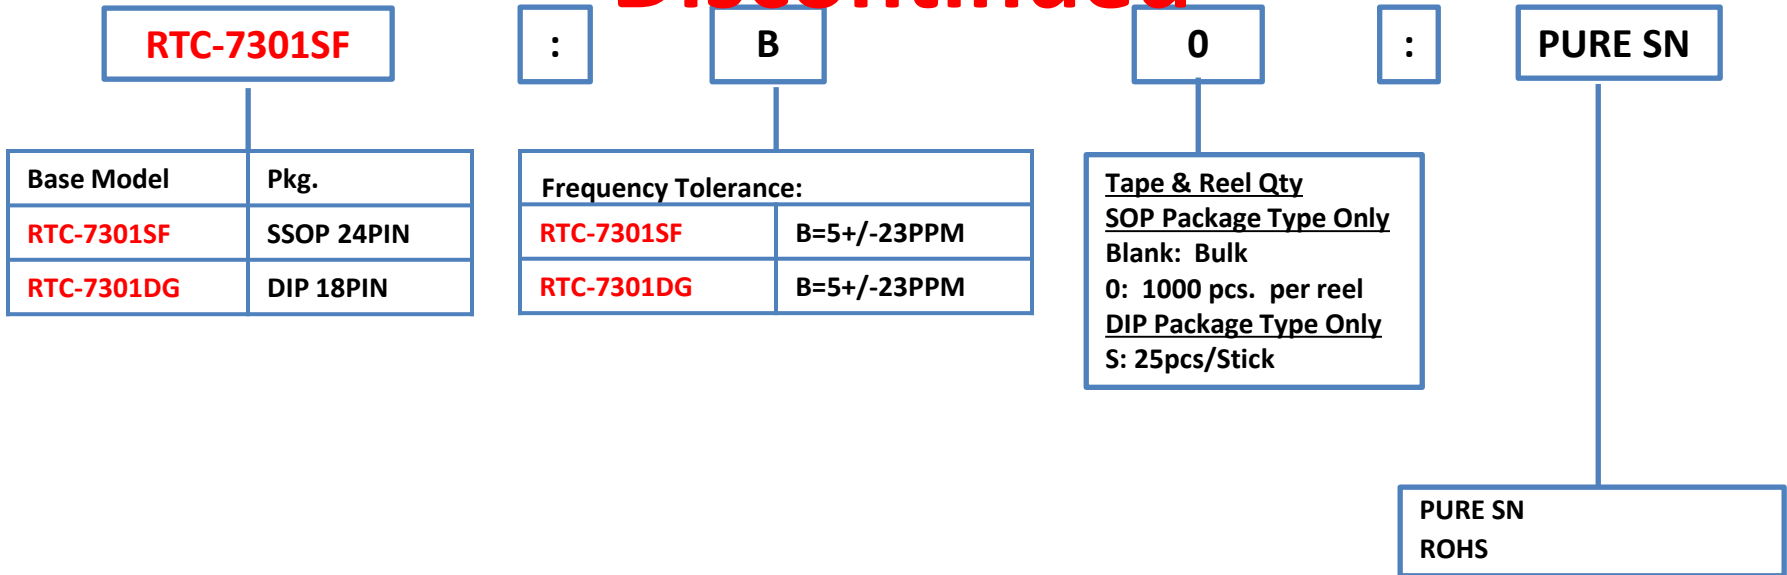

Product Configuration System



Real Time Clocks – Parallel 4-bit

Discontinued

RTC-72423A

Base Model	Pkg.	Freq. Tolerance
RTC-62421A	DIP 18PIN	+/-10ppm
RTC-62421B	DIP 18PIN	+/-50ppm
RTC-72421A	DIP 18PIN	+/-10ppm
RTC-72421B	DIP 18PIN	+/-50ppm
RTC-72423A	SSOP 24PIN	+/-20ppm
RTC-72423B	SSOP 24PIN	+/-50ppm

0

:

PURE SN

Tape & Reel Qty
SOP Package Type Only
 Blank: Bulk
 0: 1000 pcs. per reel
DIP Package Type Only
 S: 25pcs/Stick

PURE SN
 ROHS




Note:
 Model P/N in RED font = DISCONTINUED

Product Configuration System



Real Time Clock Modules – I²C-Bus and SPI

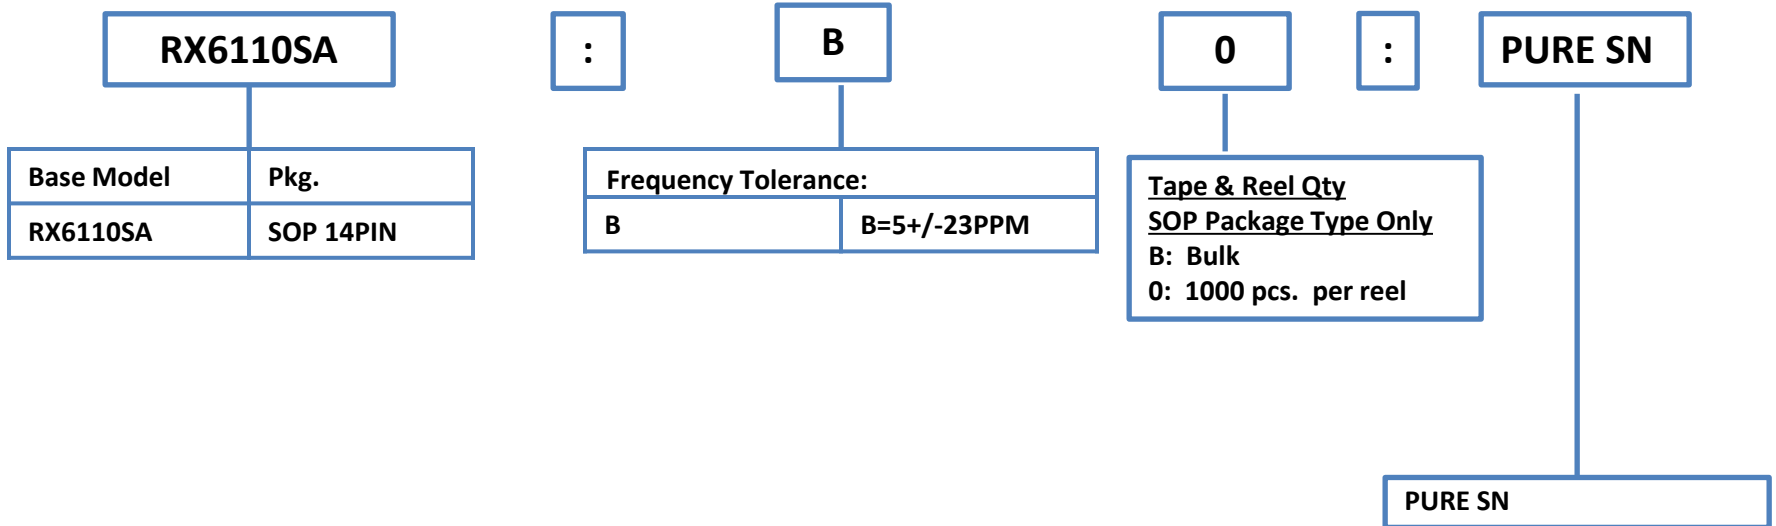

Product Configuration Guide

Appendix

Product Configuration System

Crystal Units Load Cap Codes and Values

Load Cap Code	Load Cap Value
AZ	3.5
VJ	4.0
EE	4.4
AT	4.8
X	5.0
JJ	5.4
E	6.0
FF	6.4
DD	6.5
VC	6.7
AG	7.0
AR	7.1
JK	7.4
VB	7.6
AN	7.8
AJ	8.0
AS	8.5
CC	8.7
GG	8.8
AC	9.0
AM	9.2

Load Cap Code	Load Cap Value
AL	9.5
S	9.6
VF	9.8
K	10.0
HH	10.4
AK	10.5
AP	10.7
P	11.0
AY	11.2
AW	11.5
W	12.0
A	12.5
T	13.0
N	13.5
Y	14.0
VH	14.5
R	15.0
B	16.0
AV	17.0
C	18.0
L	18.3

Load Cap Code	Load Cap Value
J	18.5
AQ	19.0
G	20.0
AF	21.5
D	22.0
AU	22.5
AE	22.9
AH	23.0
V	24.0
AI	25.0
Z	26.0
AA	27.0
Q	28.0
AB	30.0
H	32.0
I	33.0
U	47.0
AD	50.0
M	100.0
F	Series