

Temperature Compensated Crystal Oscillator (VC-TCXO)

TG – 5001 LA

Preliminary

- Developed for cellular phone.
- Reflowable and high density mounting type ultra small size SMD (3.2×2.5×1.2 mm).
- Using the heat-resisting type AT cut quartz crystal
allows almost the same temperature soldering as universal SMD IC.
- Operating supply voltage : 2.8 V.



■ Specifications

1. Absolute Maximum Ratings

Item	Symbol	Condition	Min.	Max.	Unit
Maximum supply voltage	V_{CC-GND}		-0.3	4.5	V
Maximum input voltage	V_{IN}	Vc Terminal	-0.3	$V_{CC}+0.3$	V
Storage temperature	TSTG		-40	+85	°C

2. Operating Conditions

Item	Symbol	Condition	Min.	Max.	Unit
Supply voltage	V_{CC}		2.66	2.94	V
Control voltage	V_C		GND	V_{CC}	V
Operating temperature	T_{OPR}		-30	+80	°C

3. Frequency Characteristics

Item	Symbol	Condition	Spec.	Unit
Output frequency range	f_o		12.600/13.000/ 14.400/16.800	MHz
Frequency tolerance	Δf_o	$V_C = 1.4 \text{ V}, +25 \text{ }^\circ\text{C} \pm 2 \text{ }^\circ\text{C}$	$\pm 2.5 \times 10^{-6}$ Max.	-
Frequency stability vs. temperature	Δf_T	-20 °C to +75 °C (Based on frequency at +25 °C)	$\pm 2.5 \times 10^{-6}$ Max.	-
Frequency stability vs. load	Δf_L	10 k Ω //10 pF $\pm 10 \%$	$\pm 0.2 \times 10^{-6}$ Max.	-
Frequency stability vs. supply voltage	Δf_V	2.8 V $\pm 5 \%$	$\pm 0.3 \times 10^{-6}$ Max.	-
Aging	f_a	Ta=+25 °C, first year	$\pm 1.0 \times 10^{-6}$ Max.	-

4. Frequency Adjustment Characteristics

Item	Symbol	Condition	Min.	Max.	Unit
Input resistance	Z_{IN}	VC-GND (DC), $V_C = 1.4 \text{ V}$	800		k Ω
Frequency control range	Δf_C	$V_C = 1.4 \text{ V} \pm 1.0 \text{ V}$	$\pm 6.0 \times 10^{-6}$	$\pm 12.0 \times 10^{-6}$	-
Frequency change polarity	-		Positive polarity		


5. Electrical Characteristics

Item	Symbol	Condition	Min.	Max.	Unit
Current consumption	I_{CC}	$V_{CC} = 2.8 \text{ V}, 10 \text{ k}\Omega // 10 \text{ pF}$		1.8	mA


6. Output Characteristics

Item	Symbol	Condition	Min.	Max.	Unit
Output load	R_L	$C_L // R_L$	9	11	k Ω
	C_L	(DC cut capacitor = 0.01 μF)	9	11	pF
Output level	V_{OUT}	Peak to peak	0.8		V
Duty	Duty	GND level (DC cut)	40	60	%
Harmonics	-			-5	dBc

External Dimensions

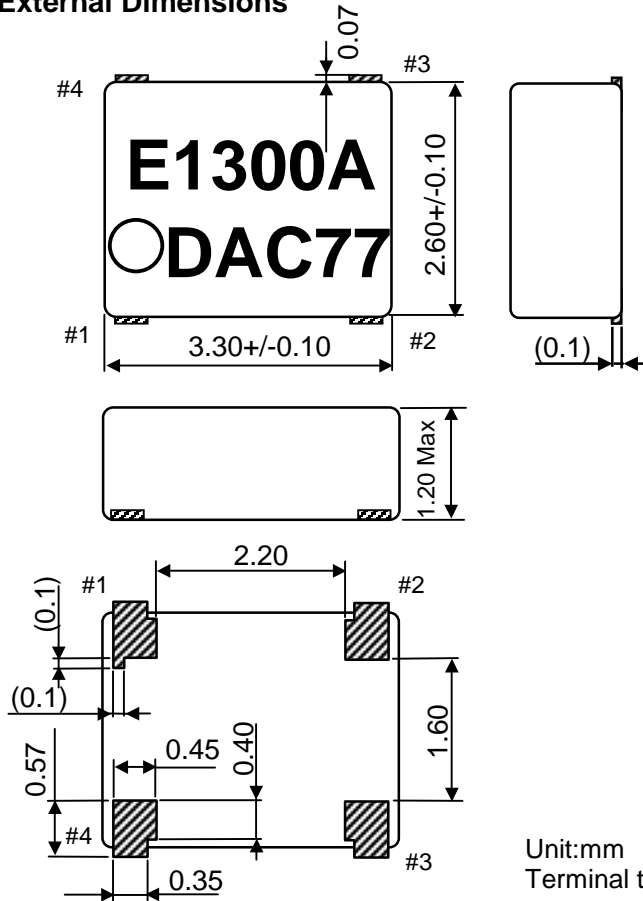

Recommended soldering pattern

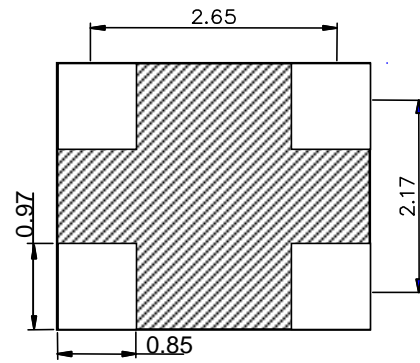

Do not design any patterns except GND on the shaded area.

Except for this recommended soldering pattern, please contact us for inquiries.

No.	Terminal
#1	V _c
#2	GND
#3	OUT
#4	V _{CC}

Unit:mm

Terminal treatment : Solder-Plating(Pb-Free)

NOTICE

- The material is subject to change without notice.
- Any part of this material may not be reproduced or duplicated in any form or any means without the written permission of Seiko Epson.
- The information, applied circuit, program, using way etc., written in this material is just for reference. Seiko Epson does not assume any liability for the occurrence of infringing any patent or copyright of third party. This material does not authorize the licence for any patent or intellectual property rights.
- Any product described in this material may contain technology or the subject relating to strategic products under the control of the Foreign Exchange and Foreign Trade Law of Japan and may require an export licence from the Ministry of international Trade and industry or other approval from another government agency.
- The products(except for some product for automotive applications) listed up on this material are designed to be used with ordinary electronic equipment(OA equipment, AV equipment,communications equipment, measuring instruments etc). Seiko Epson does not assume any liability for the case using the products with the application required high reliability or safety extremely (such as aerospace equipment etc). When intending to use any our product with automotive application and the other application than ordinary electric equipments as above, please contact our sales representatives in advance.

© SEIKO EPSON CORPORATION 2003

SEIKO EPSON CORPORATION

ELECTRONIC DEVICE MARKETING DEPARTMENT

EPSON ELECTRONICS AMERICA, INC.

150 River Oaks Parkway, San Jose, CA 95134, U.S.A.

Phone: (1)800-228-3964 (Toll free) : (1)408-922-0200 Fax: (1)408-922-0238

EPSON EUROPE ELECTRONICS GmbH

Riesstrasse 15, 80992 Munich, Germany

Phone: (49)-(0)89-14005-0 Fax: (49)-(0)89-14005-110

EPSON (CHINA) CO., LTD.

23F, Beijing Silver Tower 2# North RD DongSangHuan ChaoYang District, Beijing, China

Phone: (86) 10-6410-6655 Fax: (86) 10-6410-7319

EPSON HONG KONG LTD.

20/F., Harbour Centre, 25 Harbour Road, Wanchai, Hong kong

Phone: (852) 2585-4600 Fax: (852) 2827-2152

EPSON TAIWAN TECHNOLOGY & TRADING LTD.

14F, No.7, Song Ren Road, Taipei 110

Phone: (886) 2-8786-6688 Fax: (886) 2-8786-6660

EPSON SINGAPORE PTE. LTD.

No.1, Temasek Avenue #36-00, Millenia Tower, Singapore 039192

Phone: (65) 337-7911 Fax: (65) 334-2716

SEIKO EPSON CORPORATION KOREA Office

50F, KLI 63 Building,60 Yoido-dong, Youngdeungpo-Ku, Seoul, 150-763, Korea

Phone: (82) 2-784-6027 Fax: (82) 2-767-3677