


THIN SMD HIGH-FREQUENCY CRYSTAL UNIT

FA-365

- High-density mounting-type SMD.
- Excellent reliability and environment capability.
- Capable of covering a wide frequency range. (from 14 MHz to 41 MHz)
- 1.4 mm thickness is equal to SMD-type IC.

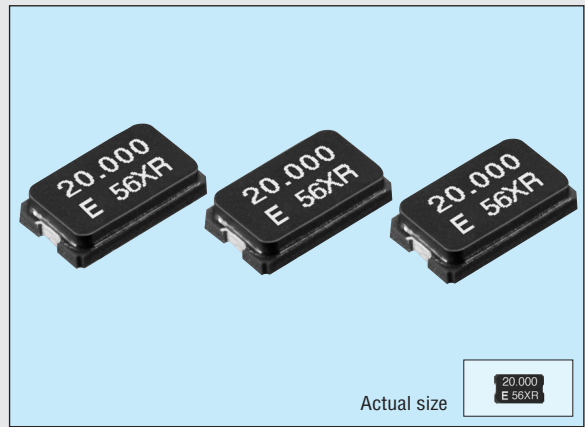

Specifications (characteristics)

Item	Symbol	Specifications	Remarks	
Nominal frequency range	f	14.000 MHz to 41.000 MHz	Fundamental mode	
Temperature range	Storage temperature	T _{STG}	-55 °C to +125 °C	Stored as bare product after unpacking
	Operating temperature	T _{OPR}	-20 °C to +70 °C	
Drive level	Maximum drive level	GL	2 mW Max.	Only crystal oscillation is guaranteed
	Recommended drive level	DL	10 μW to 100 μW	
Soldering condition	T _{SOL}	Twice at under +260 °C within 10 s or under +230 °C within 3 min.		
Frequency tolerance (standard)	Δf/f	±50 x 10 ⁻⁶ , ±100 x 10 ⁻⁶	Ta=+25 °C±3 °C	
Frequency temperature characteristics (standard)		±30 x 10 ⁻⁶	-20 °C to +70 °C	
Load capacitance	C _L	10 pF to ∞	Please specify	
Series resistance	R ₁	50 Ω Max.	-20 °C to +70 °C, DL=100 μW	
Shunt capacitance	C ₀	5.0 pF Max.		
Insulation resistance	IR	500 MΩ Min.		
Aging	fa	±5 x 10 ⁻⁶ /year Max.	Ta=+25 °C ±3 °C, first year	
Shock resistance	S. R.	±10 x 10 ⁻⁶ Max.	Three drops on a hard board from 750 mm or excitation test with 29400 m/s ² x 0.3 ms x 1/2 sine wave x 3 directions	

External dimensions

(Unit: mm) **Recommended soldering pattern** (Unit: mm)

